

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211522

Luminaire Tested: **LSR4B20D010BZ EC4B10209027 4LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211522
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B20D010BZ EC4B10209027 4LBWGPH1
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1088.4 lumens
Efficiency: N/A
Efficacy: 52.3 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211522

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBWGPH1

Luminous Intensity Polar Plot

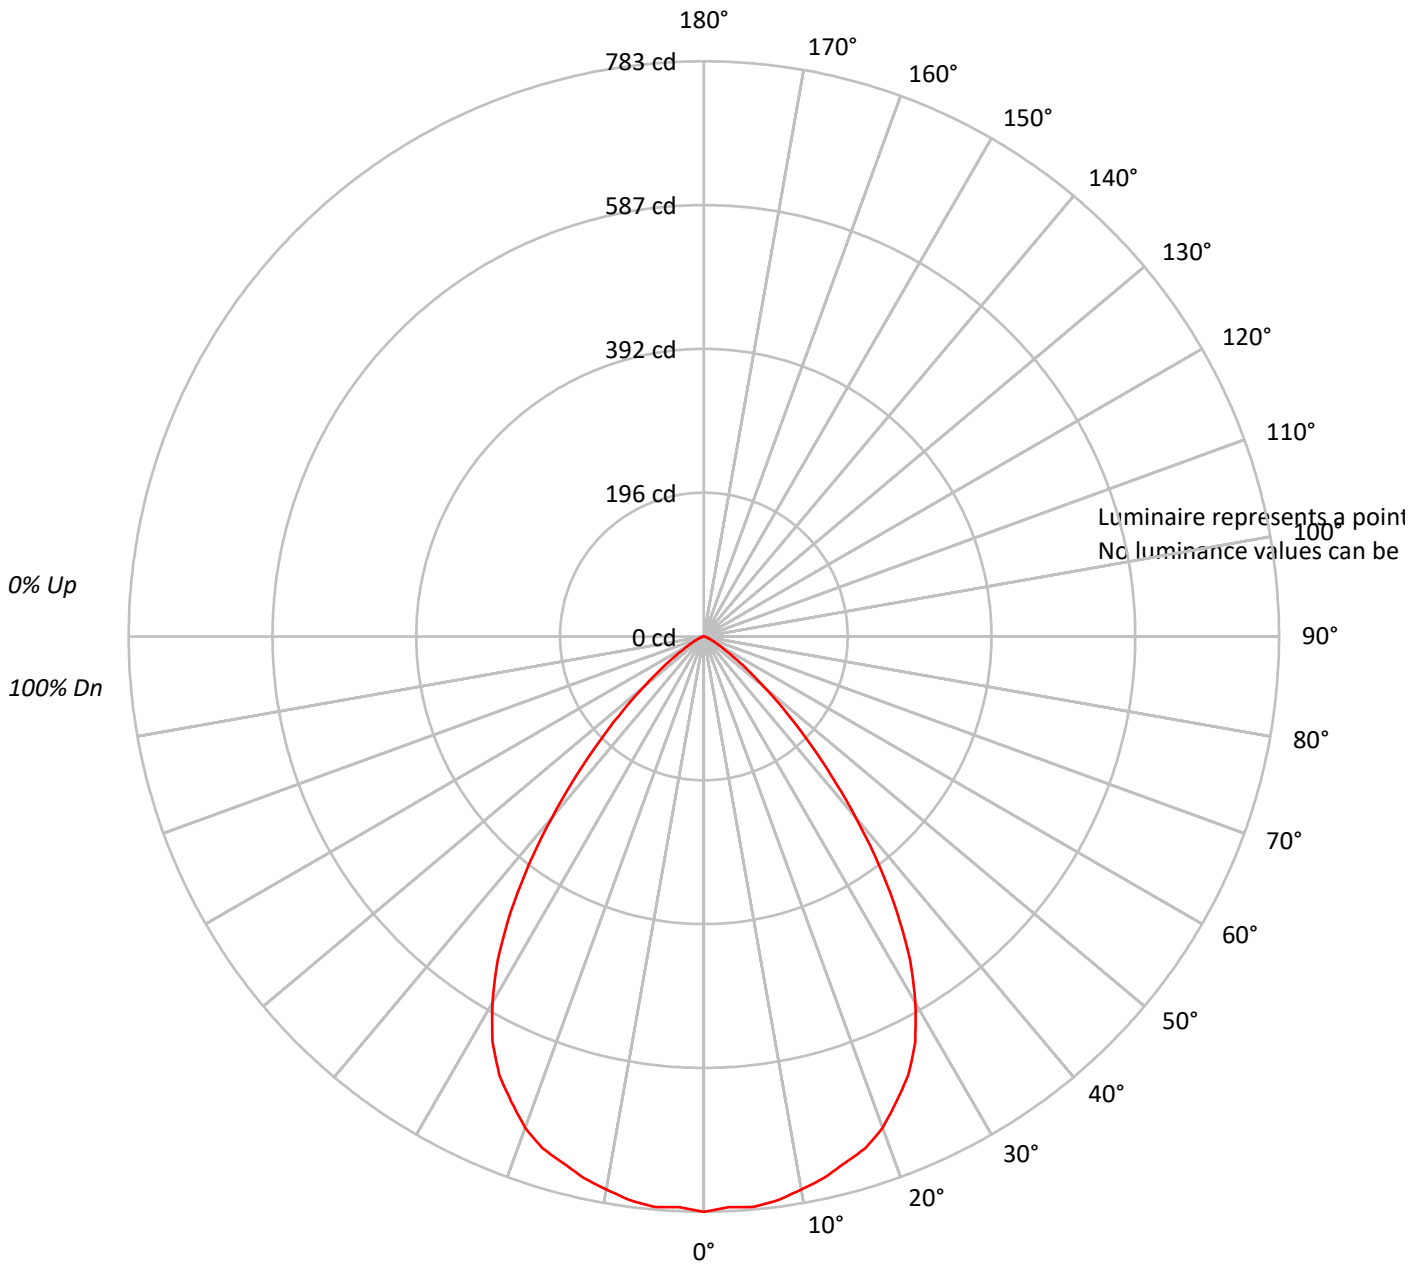



TEST NUMBER: P211522

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92			
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	77	76			
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69			
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63			
6	83	72	65	61	81	71	65	60	70	64	60	68	63	59	67	63	59	57			
7	78	67	60	55	76	66	60	55	65	59	55	64	58	55	63	58	54	53			
8	73	62	56	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48			
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45			
10	65	54	48	43	64	54	48	43	53	47	43	52	47	43	51	46	43	41			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211522

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.9	6.8
10°-20°	209.4	19.2
20°-30°	300.3	27.6
30°-40°	282.7	26.0
40°-50°	156.2	14.3
50°-60°	50.1	4.6
60°-70°	12.5	1.2
70°-80°	3.0	0.3
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	583.6	53.6
0°-40°	866.3	79.6
0°-60°	1072.6	98.5
0°-90°	1088.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1088.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	783	
5°	780	74
15°	742	209
25°	659	300
35°	459	283
45°	198	156
55°	51	50
65°	11	13
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P211522

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBWGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	783.3
2.5°	777.7
5°	779.5
7.5°	773.9
10°	764.4
12.5°	755.0
15°	741.8
17.5°	730.5
20°	711.6
22.5°	685.2
25°	658.7
27.5°	622.9
30°	575.7
32.5°	522.8
35°	458.7
37.5°	390.7
40°	320.9
42.5°	256.7
45°	198.2
47.5°	149.1
50°	107.6
52.5°	75.5
55°	51.0
57.5°	34.0
60°	24.5
62.5°	17.0
65°	11.3
67.5°	7.6
70°	5.7
72.5°	3.8
75°	1.9
77.5°	1.9
80°	1.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)