

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211585

Luminaire Tested: **LSR4B20D010BZ EC4B10209030 4LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211585
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B20D010BZ EC4B10209030 4LBCSMB1
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1690.2 lumens
Efficiency: N/A
Efficacy: 81.3 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211585

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBCSMB1

Luminous Intensity Polar Plot

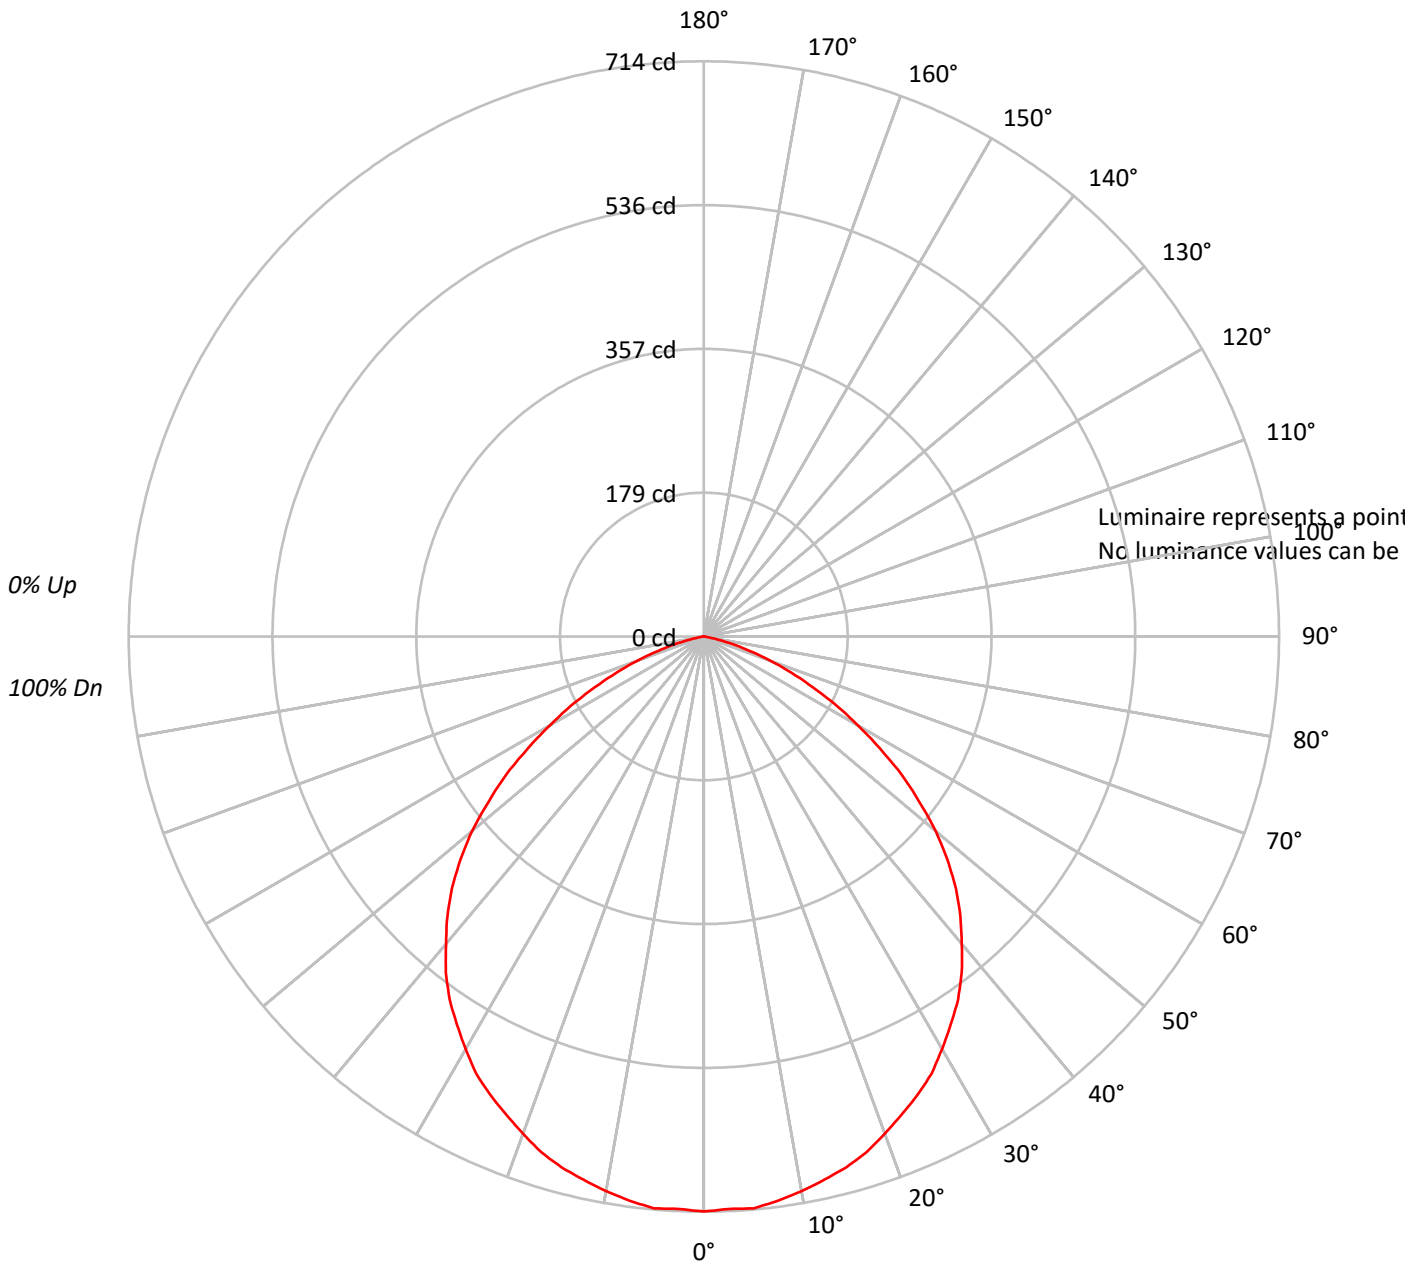



TEST NUMBER: P211585

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | |
| 1 | 111 | 107 | 103 | 100 | 108 | 104 | 101 | 98 | 100 | 98 | 95 | 96 | 94 | 92 | 93 | 91 | 90 | 88 | | | | | | | | | | | | | | | | | | | |
| 2 | 102 | 95 | 89 | 84 | 99 | 93 | 87 | 83 | 89 | 85 | 81 | 86 | 82 | 79 | 83 | 80 | 77 | 75 | | | | | | | | | | | | | | | | | | | |
| 3 | 93 | 84 | 77 | 71 | 91 | 83 | 76 | 70 | 80 | 74 | 69 | 77 | 72 | 68 | 74 | 70 | 67 | 65 | | | | | | | | | | | | | | | | | | | |
| 4 | 86 | 75 | 67 | 61 | 84 | 74 | 66 | 61 | 71 | 65 | 60 | 69 | 63 | 59 | 67 | 62 | 58 | 56 | | | | | | | | | | | | | | | | | | | |
| 5 | 79 | 67 | 59 | 53 | 77 | 66 | 59 | 53 | 64 | 57 | 52 | 62 | 56 | 52 | 61 | 55 | 51 | 49 | | | | | | | | | | | | | | | | | | | |
| 6 | 74 | 61 | 53 | 47 | 72 | 60 | 52 | 46 | 58 | 51 | 46 | 57 | 50 | 46 | 55 | 50 | 45 | 43 | | | | | | | | | | | | | | | | | | | |
| 7 | 68 | 55 | 47 | 41 | 67 | 55 | 47 | 41 | 53 | 46 | 41 | 52 | 45 | 41 | 50 | 45 | 40 | 39 | | | | | | | | | | | | | | | | | | | |
| 8 | 64 | 51 | 43 | 37 | 62 | 50 | 42 | 37 | 49 | 42 | 37 | 48 | 41 | 37 | 46 | 41 | 36 | 35 | | | | | | | | | | | | | | | | | | | |
| 9 | 60 | 47 | 39 | 33 | 58 | 46 | 39 | 33 | 45 | 38 | 33 | 44 | 38 | 33 | 43 | 37 | 33 | 31 | | | | | | | | | | | | | | | | | | | |
| 10 | 56 | 43 | 35 | 30 | 55 | 43 | 35 | 30 | 42 | 35 | 30 | 41 | 34 | 30 | 40 | 34 | 30 | 28 | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211585

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBCSMB1

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 67.5 | 4.0 |
| 10°-20° | 192.3 | 11.4 |
| 20°-30° | 289.1 | 17.1 |
| 30°-40° | 343.0 | 20.3 |
| 40°-50° | 339.5 | 20.1 |
| 50°-60° | 266.6 | 15.8 |
| 60°-70° | 149.5 | 8.8 |
| 70°-80° | 42.0 | 2.5 |
| 80°-90° | 0.7 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 548.9 | 32.5 |
| 0°-40° | 892.0 | 52.8 |
| 0°-60° | 1498.1 | 88.6 |
| 0°-90° | 1690.2 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1690.2 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 714 | |
| 5° | 712 | 68 |
| 15° | 682 | 192 |
| 25° | 628 | 289 |
| 35° | 550 | 343 |
| 45° | 442 | 339 |
| 55° | 300 | 267 |
| 65° | 149 | 149 |
| 75° | 36 | 42 |
| 85° | 0 | 1 |
| 90° | 0 | |



TEST NUMBER: P211585

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBCSMB1

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 713.7 |
| 2.5° | 711.3 |
| 5° | 712.5 |
| 7.5° | 706.4 |
| 10° | 699.2 |
| 12.5° | 690.7 |
| 15° | 682.2 |
| 17.5° | 671.3 |
| 20° | 656.7 |
| 22.5° | 642.2 |
| 25° | 627.7 |
| 27.5° | 611.9 |
| 30° | 591.3 |
| 32.5° | 570.7 |
| 35° | 550.1 |
| 37.5° | 525.9 |
| 40° | 498.0 |
| 42.5° | 471.4 |
| 45° | 442.3 |
| 47.5° | 409.6 |
| 50° | 375.6 |
| 52.5° | 336.9 |
| 55° | 300.5 |
| 57.5° | 259.3 |
| 60° | 220.5 |
| 62.5° | 185.4 |
| 65° | 149.0 |
| 67.5° | 117.5 |
| 70° | 87.2 |
| 72.5° | 59.4 |
| 75° | 36.4 |
| 77.5° | 18.2 |
| 80° | 4.8 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)