

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211605

Luminaire Tested: **LSR4B20D010BZ EC4B10209030 4LBSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211605  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B20D010BZ EC4B10209030 4LBSMW1  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1771.7 lumens  
Efficiency: N/A  
Efficacy: 85.2 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211605

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBSMW1

### Luminous Intensity Polar Plot

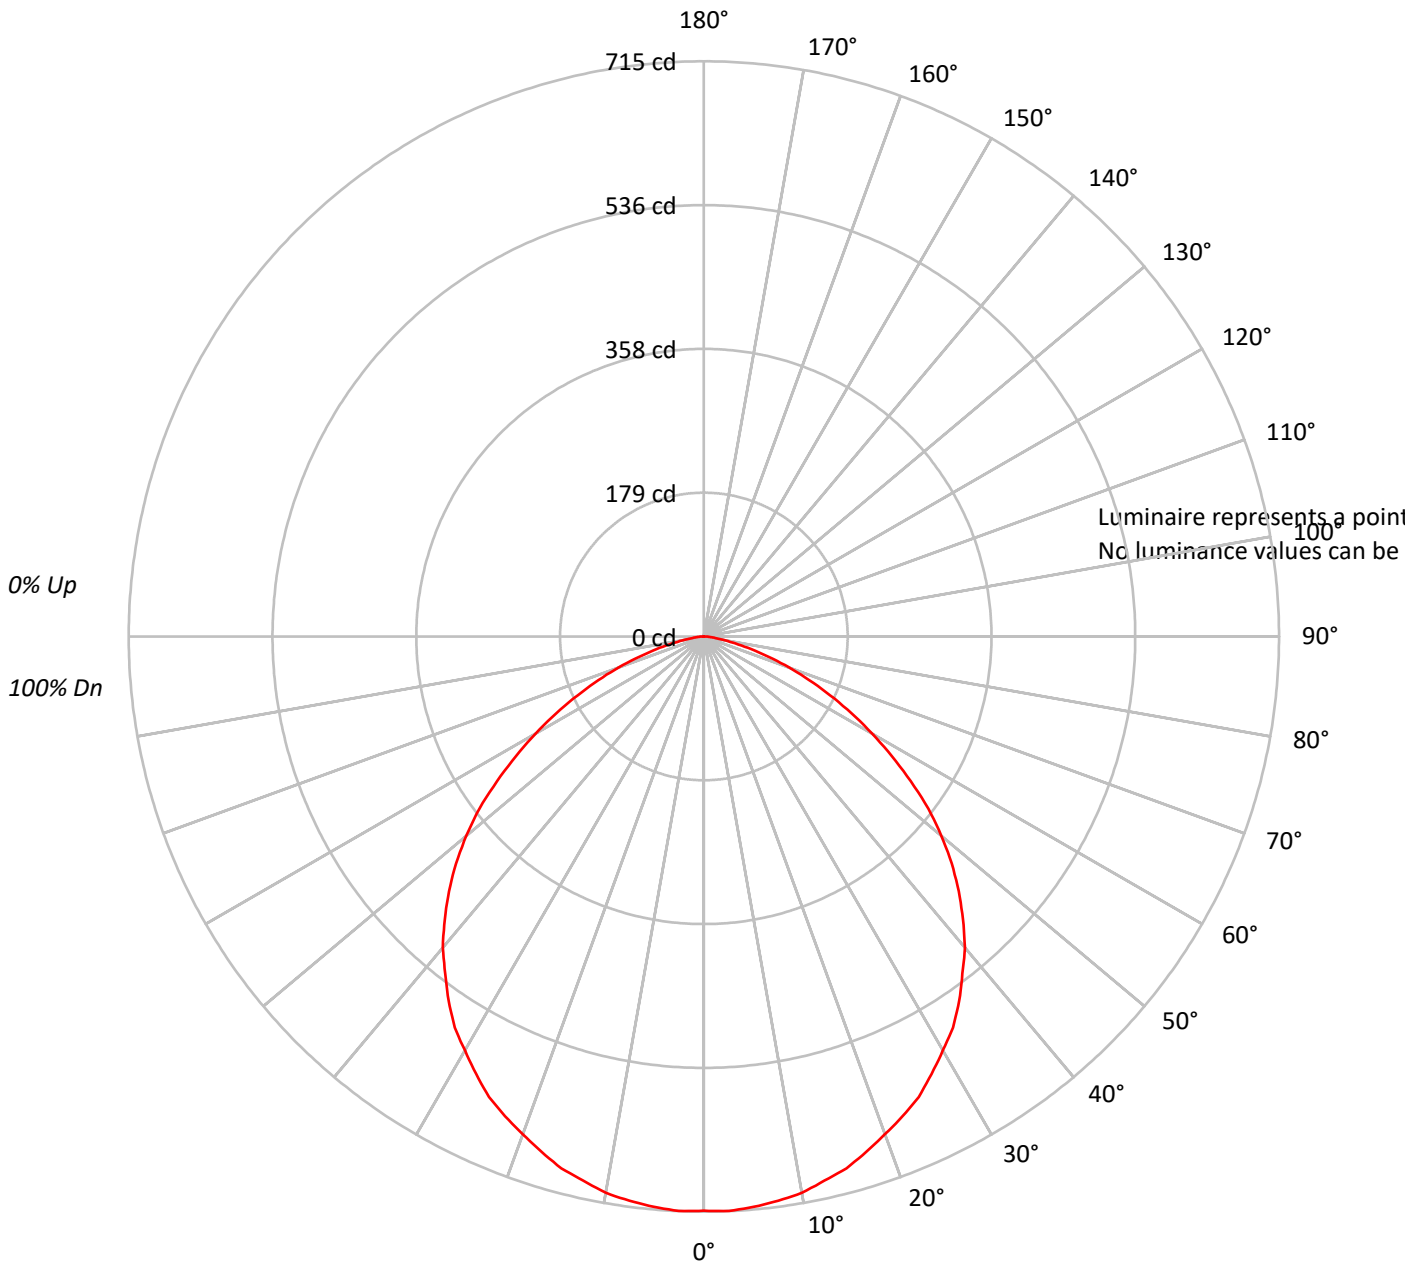



TEST NUMBER: P211605

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211605

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	67.6	3.8
10°-20°	192.8	10.9
20°-30°	290.4	16.4
30°-40°	345.5	19.5
40°-50°	344.9	19.5
50°-60°	280.5	15.8
60°-70°	172.5	9.7
70°-80°	66.8	3.8
80°-90°	10.7	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	550.8	31.1
0°-40°	896.3	50.6
0°-60°	1521.6	85.9
0°-90°	1771.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1771.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	714	
5°	712	68
15°	684	193
25°	632	290
35°	553	345
45°	448	345
55°	314	280
65°	173	173
75°	61	67
85°	8	11
90°	0	



TEST NUMBER: P211605

CATALOG NUMBER: LSR4B20D010BZ EC4B10209030 4LBSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	713.8
2.5°	714.9
5°	711.7
7.5°	707.5
10°	702.3
12.5°	692.8
15°	684.4
17.5°	671.8
20°	658.2
22.5°	645.6
25°	631.9
27.5°	613.0
30°	594.2
32.5°	576.3
35°	553.2
37.5°	528.0
40°	504.9
42.5°	476.6
45°	448.2
47.5°	417.8
50°	385.3
52.5°	351.7
55°	313.9
57.5°	277.1
60°	241.4
62.5°	206.8
65°	173.2
67.5°	141.7
70°	112.3
72.5°	85.0
75°	60.9
77.5°	39.9
80°	24.1
82.5°	14.7
85°	8.4
87.5°	4.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)