

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211621

Luminaire Tested: **LSR4B20D010BZ EC4B10209730 4LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211621
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B20D010BZ EC4B10209730 4LBMMW1
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1183.1 lumens
Efficiency: N/A
Efficacy: 56.9 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211621

CATALOG NUMBER: LSR4B20D010BZ EC4B10209730 4LBMMW1

Luminous Intensity Polar Plot

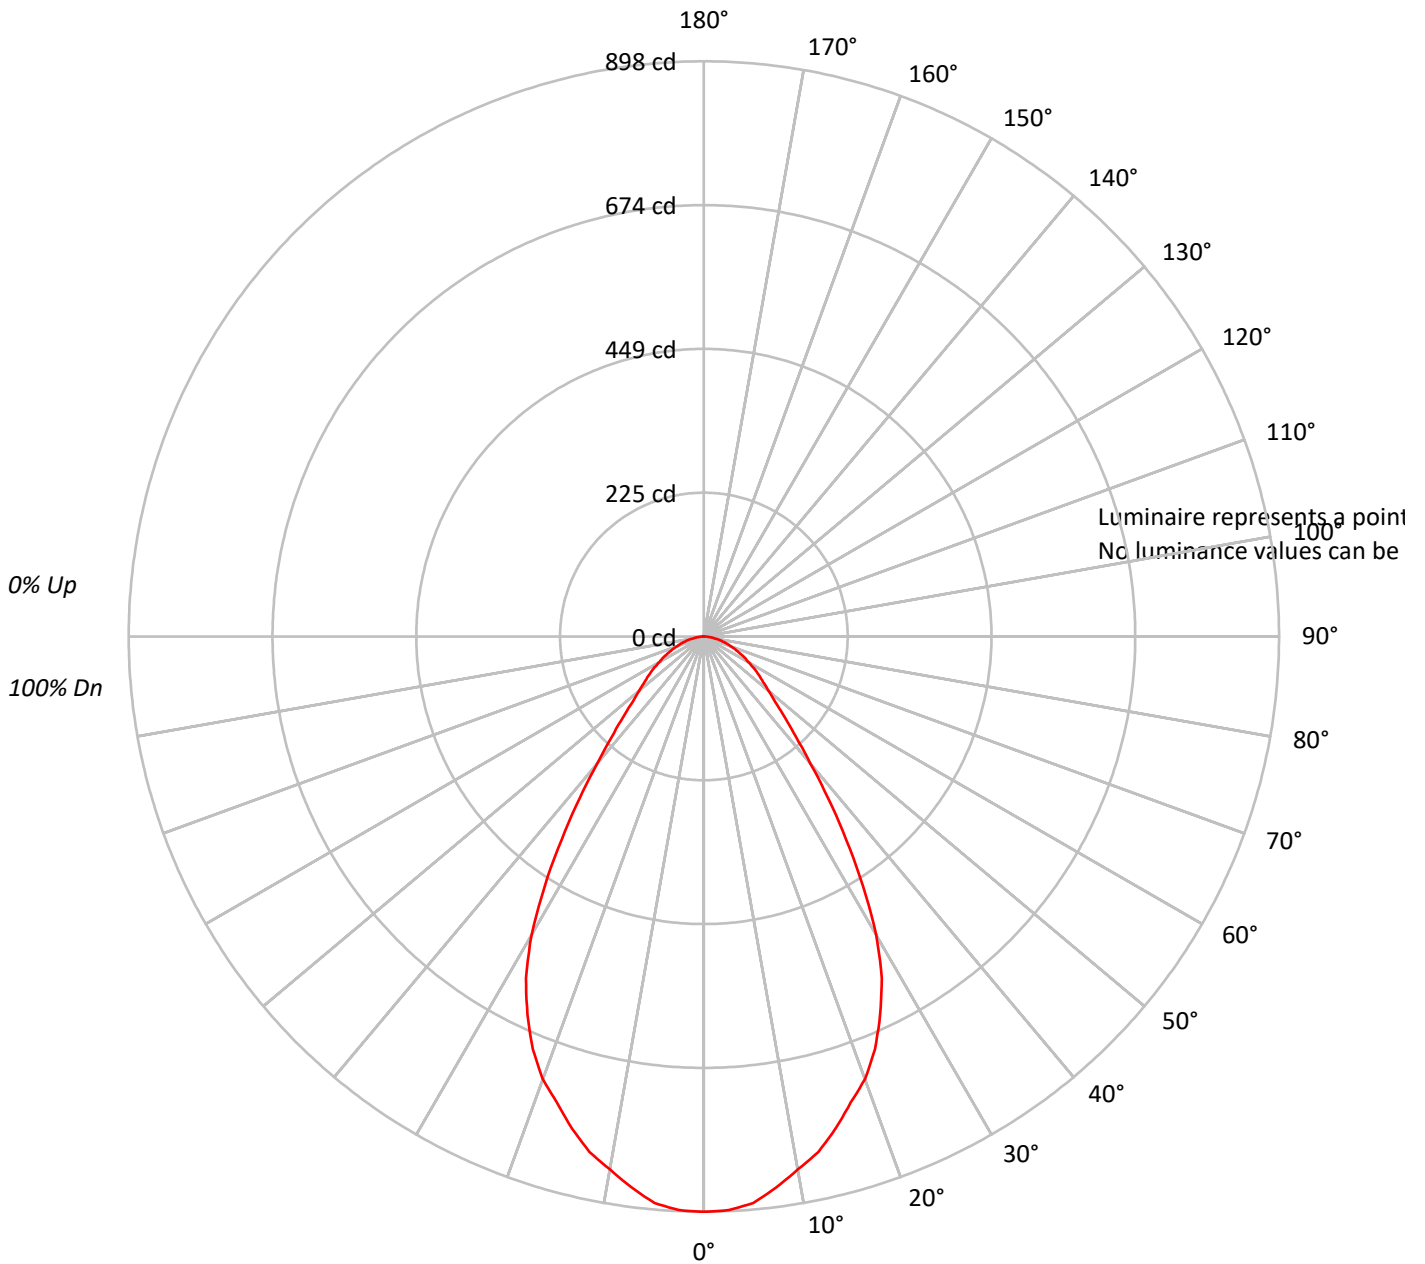



TEST NUMBER: P211621

CATALOG NUMBER: LSR4B20D010BZ EC4B10209730 4LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89						89													
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80						80													
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71						71													
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64						64													
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58						58													
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53						53													
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49						49													
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45						45													
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42						42													
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39						39													

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211621

CATALOG NUMBER: LSR4B20D010BZ EC4B10209730 4LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	83.3	7.0
10°-20°	223.2	18.9
20°-30°	296.7	25.1
30°-40°	242.7	20.5
40°-50°	141.4	11.9
50°-60°	93.8	7.9
60°-70°	61.7	5.2
70°-80°	32.5	2.8
80°-90°	7.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	603.2	51.0
0°-40°	845.9	71.5
0°-60°	1081.0	91.4
0°-90°	1183.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1183.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	898	
5°	888	83
15°	795	223
25°	651	297
35°	387	243
45°	178	141
55°	105	94
65°	62	62
75°	31	33
85°	7	8
90°	0	



TEST NUMBER: P211621

CATALOG NUMBER: LSR4B20D010BZ EC4B10209730 4LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	898.1
2.5°	896.4
5°	887.8
7.5°	867.3
10°	845.0
12.5°	824.4
15°	795.3
17.5°	762.7
20°	735.3
22.5°	697.6
25°	651.3
27.5°	601.6
30°	538.2
32.5°	462.8
35°	387.4
37.5°	318.8
40°	258.8
42.5°	212.5
45°	178.3
47.5°	150.8
50°	132.0
52.5°	116.5
55°	104.6
57.5°	92.6
60°	80.6
62.5°	72.0
65°	61.7
67.5°	53.1
70°	44.6
72.5°	37.7
75°	30.9
77.5°	24.0
80°	17.1
82.5°	12.0
85°	6.9
87.5°	1.7
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)