

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211688

Luminaire Tested: **LSR4B20D010BZ EC4B10209035 4LBSB1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211688  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B20D010BZ EC4B10209035 4LBSB1  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH SPECULAR BLACK TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1514.6 lumens  
Efficiency: N/A  
Efficacy: 72.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.3  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211688

CATALOG NUMBER: LSR4B20D010BZ EC4B10209035 4LBSB1

### Luminous Intensity Polar Plot

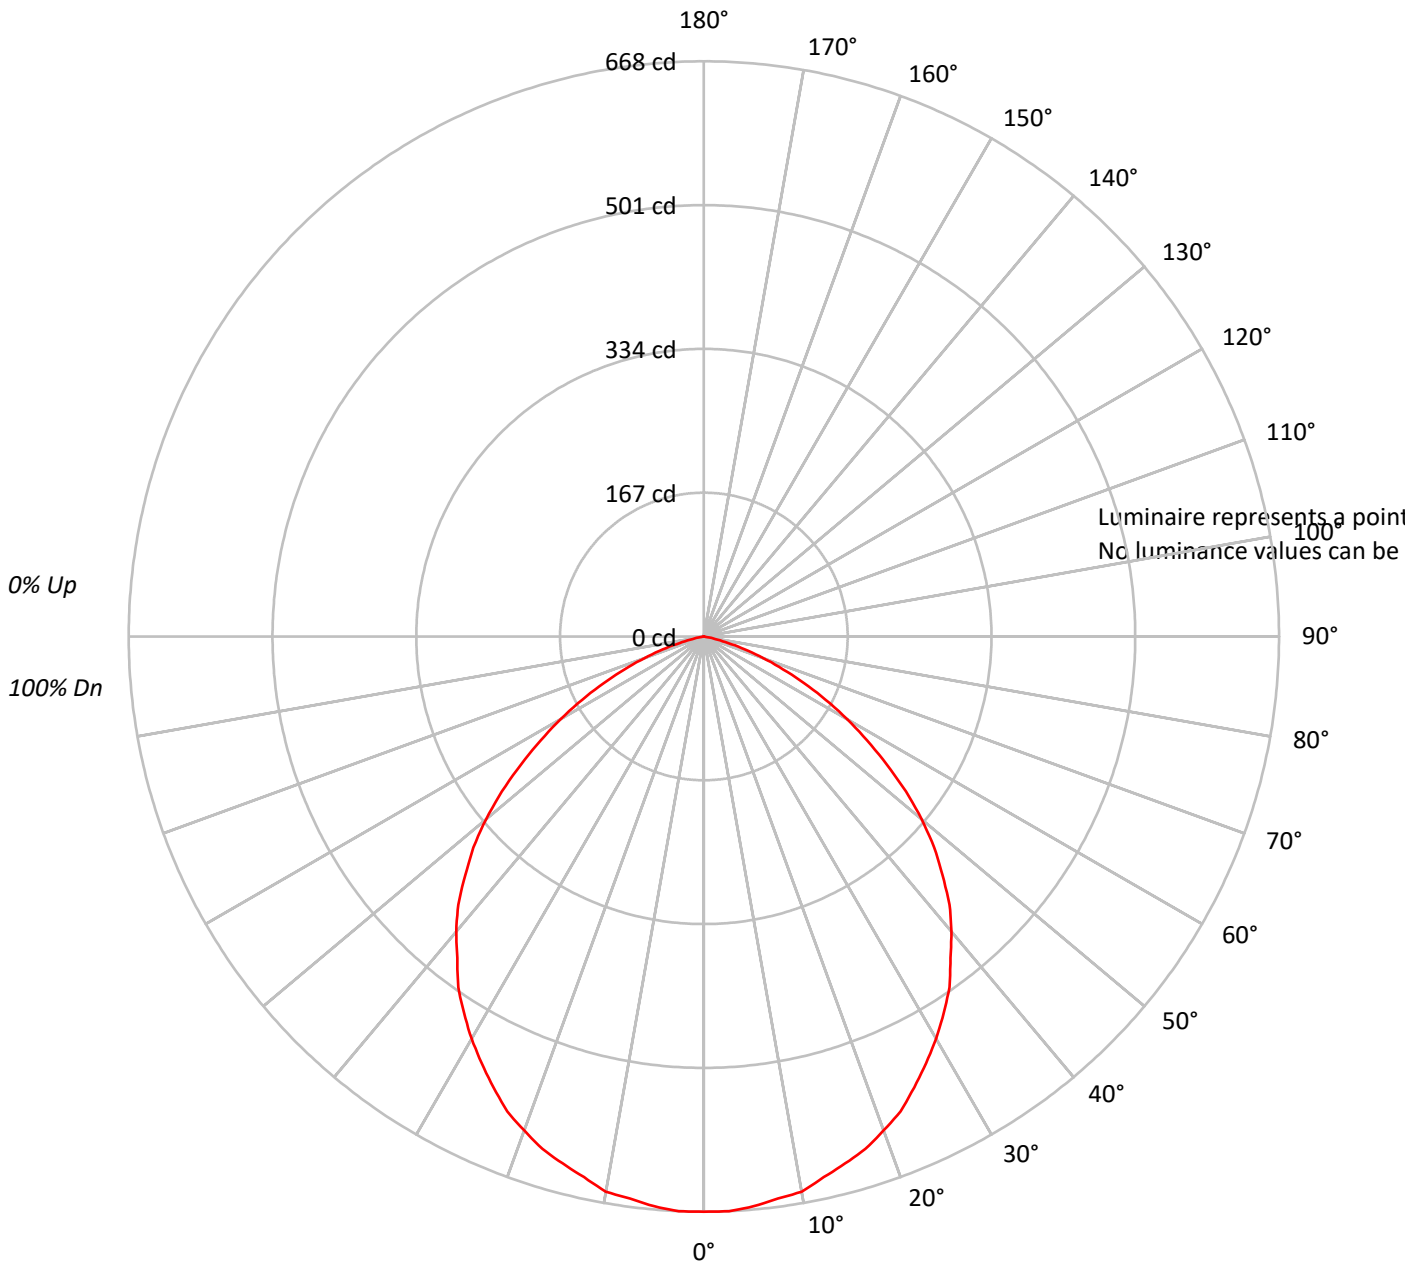



TEST NUMBER: P211688

CATALOG NUMBER: LSR4B20D010BZ EC4B10209035 4LBSB1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 111 | 107 | 103 | 100 | 108 | 105 | 101 | 98  | 100 | 98  | 95  | 97  | 94  | 93  | 93  | 91  | 90  | 88  |    |    | 88  |
| 2   | 102 | 95  | 89  | 84  | 100 | 93  | 88  | 83  | 90  | 85  | 81  | 86  | 83  | 79  | 84  | 80  | 78  | 76  |    |    | 76  |
| 3   | 94  | 84  | 77  | 72  | 91  | 83  | 76  | 71  | 80  | 74  | 70  | 77  | 73  | 68  | 75  | 71  | 67  | 65  |    |    | 65  |
| 4   | 86  | 76  | 68  | 62  | 84  | 74  | 67  | 61  | 72  | 65  | 60  | 70  | 64  | 60  | 68  | 63  | 59  | 57  |    |    | 57  |
| 5   | 80  | 68  | 60  | 54  | 78  | 67  | 59  | 53  | 65  | 58  | 53  | 63  | 57  | 52  | 61  | 56  | 52  | 50  |    |    | 50  |
| 6   | 74  | 62  | 53  | 47  | 72  | 61  | 53  | 47  | 59  | 52  | 47  | 57  | 51  | 46  | 56  | 50  | 46  | 44  |    |    | 44  |
| 7   | 69  | 56  | 48  | 42  | 67  | 55  | 48  | 42  | 54  | 47  | 42  | 52  | 46  | 41  | 51  | 45  | 41  | 39  |    |    | 39  |
| 8   | 64  | 51  | 43  | 38  | 63  | 51  | 43  | 38  | 49  | 42  | 37  | 48  | 42  | 37  | 47  | 41  | 37  | 35  |    |    | 35  |
| 9   | 60  | 47  | 39  | 34  | 59  | 47  | 39  | 34  | 46  | 39  | 34  | 45  | 38  | 34  | 44  | 38  | 34  | 32  |    |    | 32  |
| 10  | 56  | 44  | 36  | 31  | 55  | 43  | 36  | 31  | 42  | 36  | 31  | 41  | 35  | 31  | 40  | 35  | 31  | 29  |    |    | 29  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211688

CATALOG NUMBER: LSR4B20D010BZ EC4B10209035 4LBSB1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 63.1   | 4.2       |
| 10°-20°   | 178.9  | 11.8      |
| 20°-30°   | 266.2  | 17.6      |
| 30°-40°   | 309.7  | 20.5      |
| 40°-50°   | 301.9  | 19.9      |
| 50°-60°   | 232.2  | 15.3      |
| 60°-70°   | 128.4  | 8.5       |
| 70°-80°   | 34.0   | 2.2       |
| 80°-90°   | 0.3    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 508.2  | 33.6      |
| 0°-40°    | 817.9  | 54.0      |
| 0°-60°    | 1352.0 | 89.3      |
| 0°-90°    | 1514.6 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1514.6 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 668 |      |
| 5°  | 664 | 63   |
| 15° | 634 | 179  |
| 25° | 578 | 266  |
| 35° | 497 | 310  |
| 45° | 392 | 302  |
| 55° | 259 | 232  |
| 65° | 129 | 128  |
| 75° | 29  | 34   |
| 85° | 0   | 0    |
| 90° | 0   |      |



TEST NUMBER: P211688

CATALOG NUMBER: LSR4B20D010BZ EC4B10209035 4LBSB1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 668.1 |
| 2.5°  | 668.1 |
| 5°    | 664.3 |
| 7.5°  | 658.5 |
| 10°   | 654.7 |
| 12.5° | 643.2 |
| 15°   | 633.6 |
| 17.5° | 624.0 |
| 20°   | 610.5 |
| 22.5° | 597.1 |
| 25°   | 577.9 |
| 27.5° | 558.7 |
| 30°   | 539.5 |
| 32.5° | 518.4 |
| 35°   | 497.3 |
| 37.5° | 470.4 |
| 40°   | 447.3 |
| 42.5° | 422.4 |
| 45°   | 391.7 |
| 47.5° | 362.9 |
| 50°   | 330.2 |
| 52.5° | 295.7 |
| 55°   | 259.2 |
| 57.5° | 224.6 |
| 60°   | 192.0 |
| 62.5° | 159.4 |
| 65°   | 128.6 |
| 67.5° | 99.8  |
| 70°   | 73.0  |
| 72.5° | 49.9  |
| 75°   | 28.8  |
| 77.5° | 13.4  |
| 80°   | 1.9   |
| 82.5° | 0.0   |
| 85°   | 0.0   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)