

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211801

Luminaire Tested: **LSR4B20D010BZ EC4B10209050 4LBNMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211801
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B20D010BZ EC4B10209050 4LBNMW1
Description: PORTFOLIO 4 INCH CYLINDER
NARROW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1259.1 lumens
Efficiency: N/A
Efficacy: 60.5 lumens/watt
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.95
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211801

CATALOG NUMBER: LSR4B20D010BZ EC4B10209050 4LBNMW1

Luminous Intensity Polar Plot

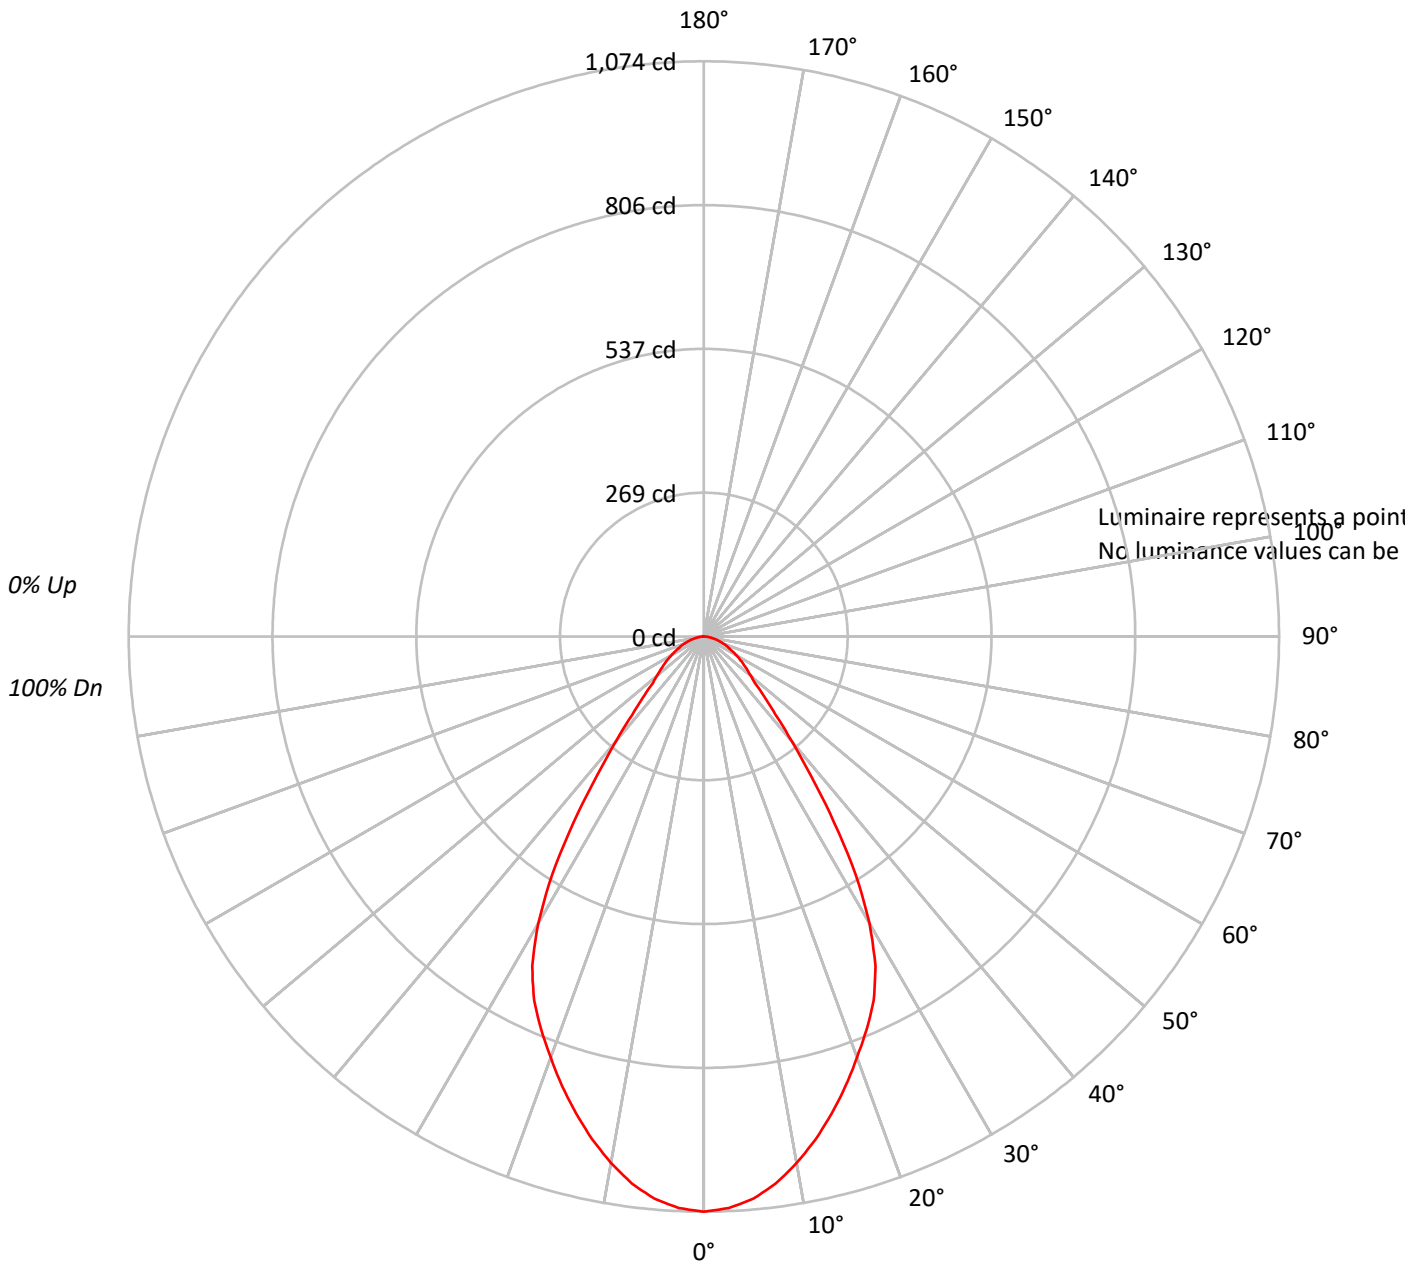



TEST NUMBER: P211801

CATALOG NUMBER: LSR4B20D010BZ EC4B10209050 4LBNMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	105	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73
4	92	83	76	71	90	82	76	71	80	74	70	78	73	69	76	72	68	67
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	52
8	73	62	55	50	71	61	55	50	60	54	50	59	53	49	58	53	49	48
9	69	58	51	46	68	57	51	46	56	50	46	55	50	46	54	49	46	44
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211801

CATALOG NUMBER: LSR4B20D010BZ EC4B10209050 4LBNMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.8	7.8
10°-20°	258.5	20.5
20°-30°	340.3	27.0
30°-40°	264.9	21.0
40°-50°	128.6	10.2
50°-60°	81.3	6.5
60°-70°	52.4	4.2
70°-80°	27.4	2.2
80°-90°	6.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	697.7	55.4
0°-40°	962.5	76.4
0°-60°	1172.4	93.1
0°-90°	1259.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1259.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1074	
5°	1054	99
15°	922	259
25°	750	340
35°	424	265
45°	160	129
55°	90	81
65°	52	52
75°	26	27
85°	6	7
90°	0	



TEST NUMBER: P211801

CATALOG NUMBER: LSR4B20D010BZ EC4B10209050 4LBNMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1074.1
2.5°	1068.1
5°	1054.1
7.5°	1030.1
10°	998.1
12.5°	962.1
15°	922.1
17.5°	880.1
20°	836.1
22.5°	794.1
25°	750.1
27.5°	694.1
30°	618.1
32.5°	528.1
35°	424.0
37.5°	328.0
40°	254.0
42.5°	198.0
45°	160.0
47.5°	130.0
50°	114.0
52.5°	102.0
55°	90.0
57.5°	80.0
60°	70.0
62.5°	60.0
65°	52.0
67.5°	46.0
70°	38.0
72.5°	32.0
75°	26.0
77.5°	20.0
80°	14.0
82.5°	10.0
85°	6.0
87.5°	2.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)