

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211872

Luminaire Tested: **LSR4B30D010BZ EC4B30508027 4LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211872
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B30D010BZ EC4B30508027 4LBWL1
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2764.1 lumens
Efficiency: N/A
Efficacy: 98.7 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211872

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBWL11

Luminous Intensity Polar Plot

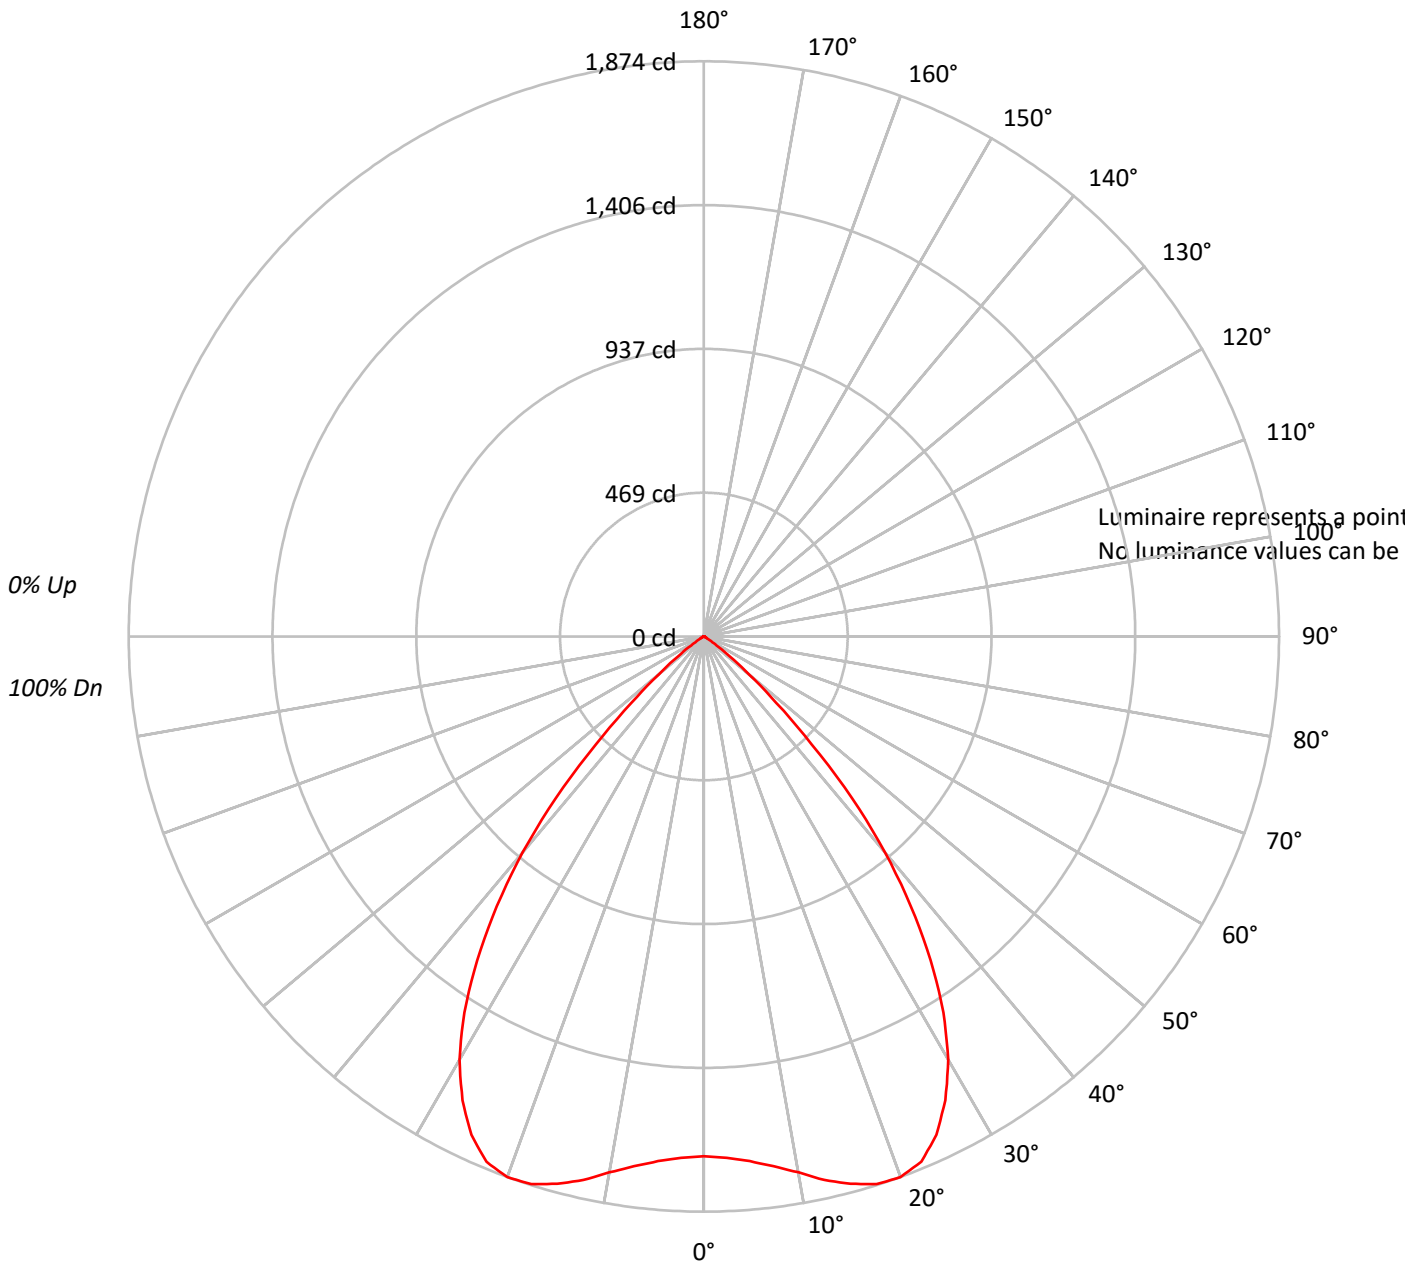



TEST NUMBER: P211872

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84			84
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77			77
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70			70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64			64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58			58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54			54
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49			49
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45			45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42			42

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211872

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBWL11

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.6	6.0
10°-20°	522.7	18.9
20°-30°	815.4	29.5
30°-40°	793.3	28.7
40°-50°	396.2	14.3
50°-60°	61.4	2.2
60°-70°	7.4	0.3
70°-80°	2.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1503.7	54.4
0°-40°	2297.0	83.1
0°-60°	2754.6	99.7
0°-90°	2764.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2764.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1694	
5°	1716	166
15°	1846	523
25°	1792	815
35°	1288	793
45°	497	396
55°	51	61
65°	6	7
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P211872

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBWLI1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1693.6
2.5°	1700.0
5°	1715.8
7.5°	1741.1
10°	1772.8
12.5°	1813.9
15°	1845.6
17.5°	1870.9
20°	1874.1
22.5°	1851.9
25°	1791.8
27.5°	1703.1
30°	1592.3
32.5°	1453.0
35°	1288.4
37.5°	1108.0
40°	918.0
42.5°	715.4
45°	497.0
47.5°	319.7
50°	193.1
52.5°	104.5
55°	50.7
57.5°	22.2
60°	12.7
62.5°	9.5
65°	6.3
67.5°	6.3
70°	3.2
72.5°	3.2
75°	3.2
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)