

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211935

Luminaire Tested: **LSR4B30D010BZ EC4B30508030 4LBCSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211935  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B30D010BZ EC4B30508030 4LBCSMW1  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM  
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W  
DL3-29.67W DLE-29.73W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3045.0 lumens  
Efficiency: N/A  
Efficacy: 108.7 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211935

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBCSMW1

### Luminous Intensity Polar Plot

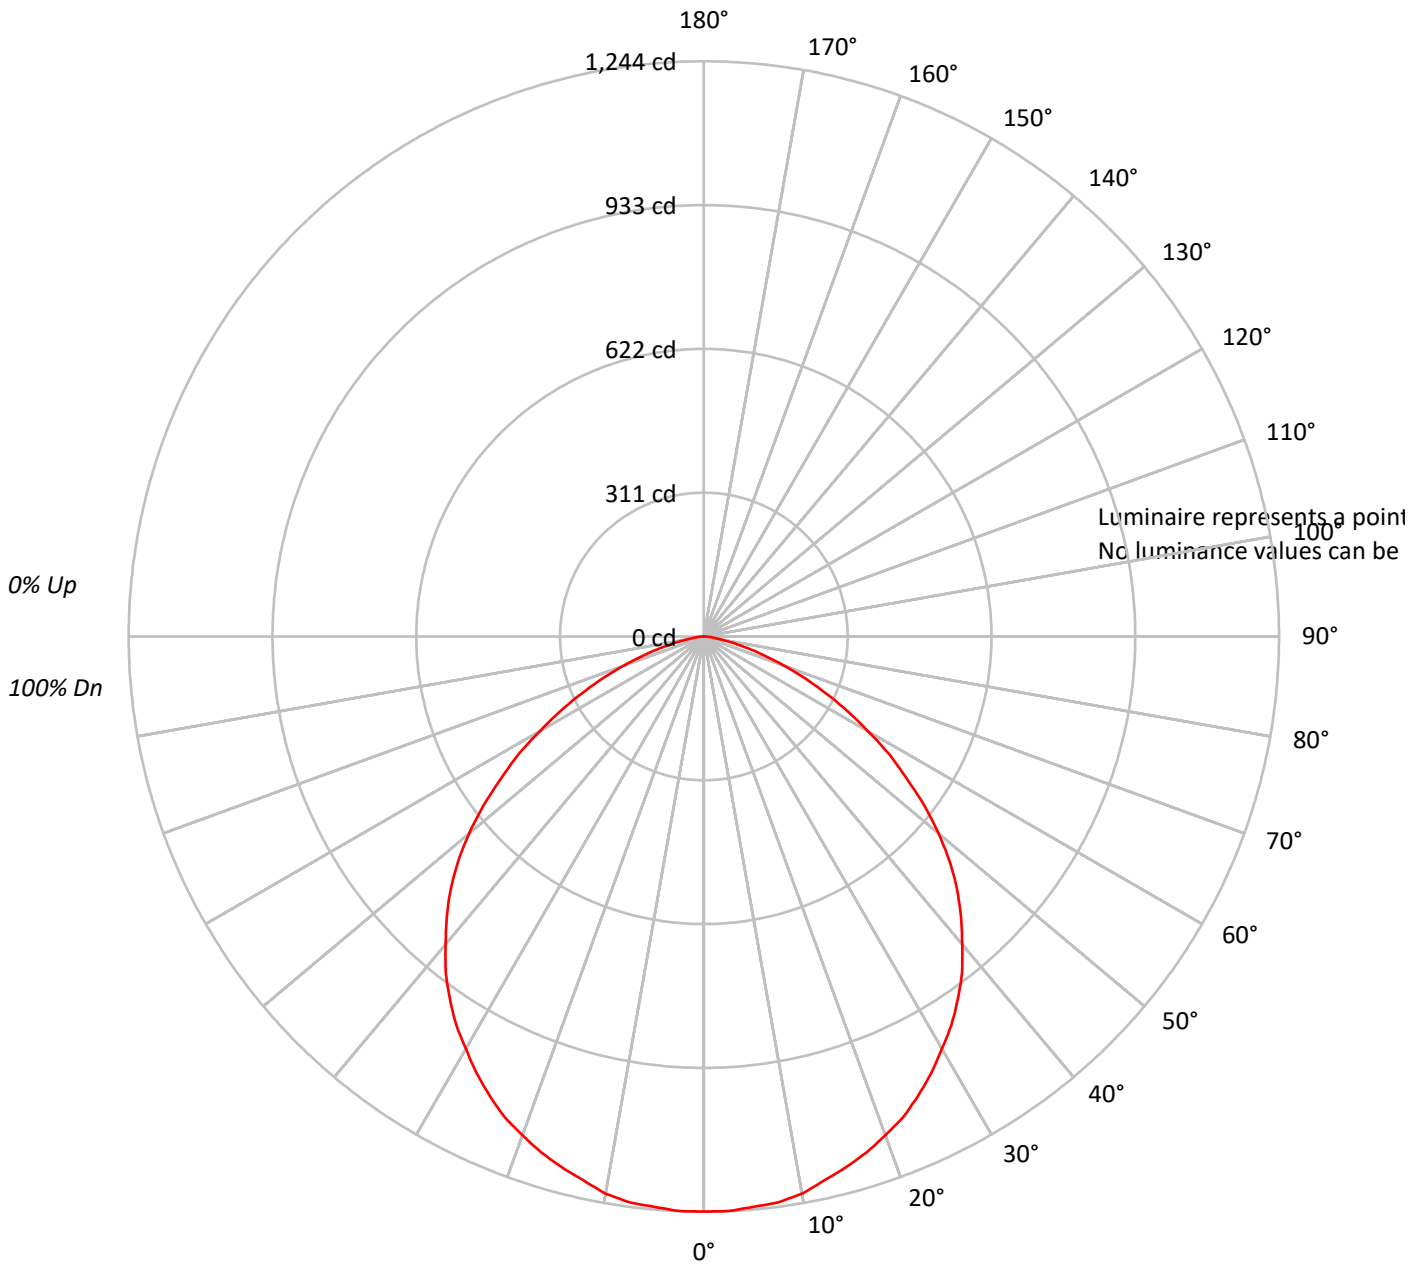



TEST NUMBER: P211935

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBCSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74			
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63			
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55			
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48			
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42			
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37			
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33			
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30			
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211935

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBCSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	117.8	3.9
10°-20°	335.5	11.0
20°-30°	504.6	16.6
30°-40°	598.1	19.6
40°-50°	595.2	19.5
50°-60°	479.8	15.8
60°-70°	290.2	9.5
70°-80°	107.8	3.5
80°-90°	16.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	957.9	31.5
0°-40°	1556.0	51.1
0°-60°	2630.9	86.4
0°-90°	3045.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3045.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1244	
5°	1238	118
15°	1188	335
25°	1096	505
35°	958	598
45°	775	595
55°	535	480
65°	292	290
75°	98	108
85°	13	16
90°	0	



TEST NUMBER: P211935

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBCSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1243.7
2.5°	1243.7
5°	1238.1
7.5°	1234.4
10°	1223.4
12.5°	1204.9
15°	1188.3
17.5°	1169.9
20°	1147.7
22.5°	1125.6
25°	1096.1
27.5°	1064.7
30°	1029.6
32.5°	996.4
35°	957.7
37.5°	917.1
40°	869.1
42.5°	823.0
45°	775.0
47.5°	721.5
50°	662.4
52.5°	601.5
55°	535.1
57.5°	476.1
60°	409.6
62.5°	350.6
65°	291.5
67.5°	236.2
70°	184.5
72.5°	138.4
75°	97.8
77.5°	62.7
80°	36.9
82.5°	22.1
85°	12.9
87.5°	5.5
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)