

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211940

Luminaire Tested: **LSR4B30D010BZ EC4B30508030 4LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211940
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B30D010BZ EC4B30508030 4LBMMW1
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2283.9 lumens
Efficiency: N/A
Efficacy: 81.6 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211940

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBMMW1

Luminous Intensity Polar Plot

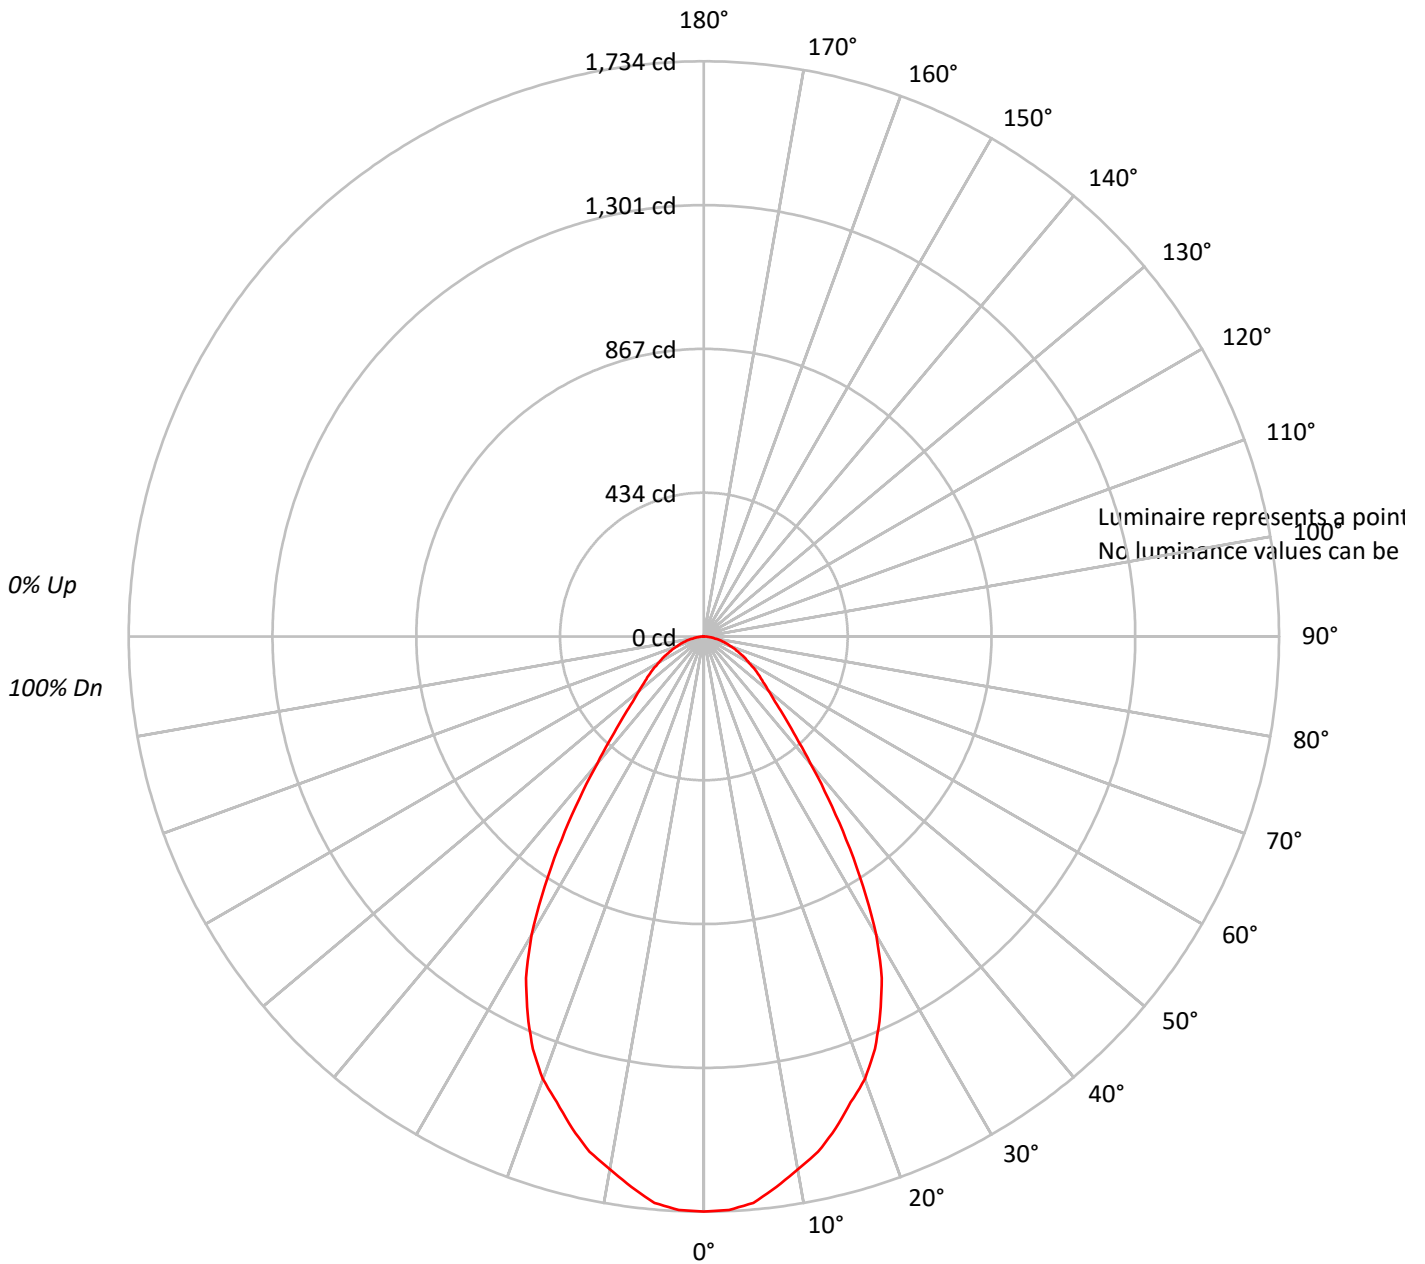



TEST NUMBER: P211940

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89																			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80																			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71																			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64																			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58																			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53																			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49																			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45																			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42																			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211940

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.7	7.0
10°-20°	430.8	18.9
20°-30°	572.8	25.1
30°-40°	468.5	20.5
40°-50°	272.9	11.9
50°-60°	181.0	7.9
60°-70°	119.0	5.2
70°-80°	62.8	2.8
80°-90°	15.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1164.3	51.0
0°-40°	1632.9	71.5
0°-60°	2086.7	91.4
0°-90°	2283.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2283.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1734	
5°	1714	161
15°	1535	431
25°	1257	573
35°	748	469
45°	344	273
55°	202	181
65°	119	119
75°	60	63
85°	13	15
90°	0	



TEST NUMBER: P211940

CATALOG NUMBER: LSR4B30D010BZ EC4B30508030 4LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1733.7
2.5°	1730.4
5°	1713.9
7.5°	1674.2
10°	1631.2
12.5°	1591.5
15°	1535.2
17.5°	1472.3
20°	1419.4
22.5°	1346.6
25°	1257.3
27.5°	1161.3
30°	1038.9
32.5°	893.3
35°	747.8
37.5°	615.4
40°	499.6
42.5°	410.3
45°	344.1
47.5°	291.2
50°	254.8
52.5°	225.0
55°	201.8
57.5°	178.7
60°	155.5
62.5°	139.0
65°	119.1
67.5°	102.6
70°	86.0
72.5°	72.8
75°	59.6
77.5°	46.3
80°	33.1
82.5°	23.2
85°	13.2
87.5°	3.3
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)