

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211995

Luminaire Tested: **LSR4B30D010BZ EC4B30509730 4LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211995
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B30D010BZ EC4B30509730 4LBMGPH1
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1176.1 lumens
Efficiency: N/A
Efficacy: 42.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.92
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211995

CATALOG NUMBER: LSR4B30D010BZ EC4B30509730 4LBMGPH1

Luminous Intensity Polar Plot

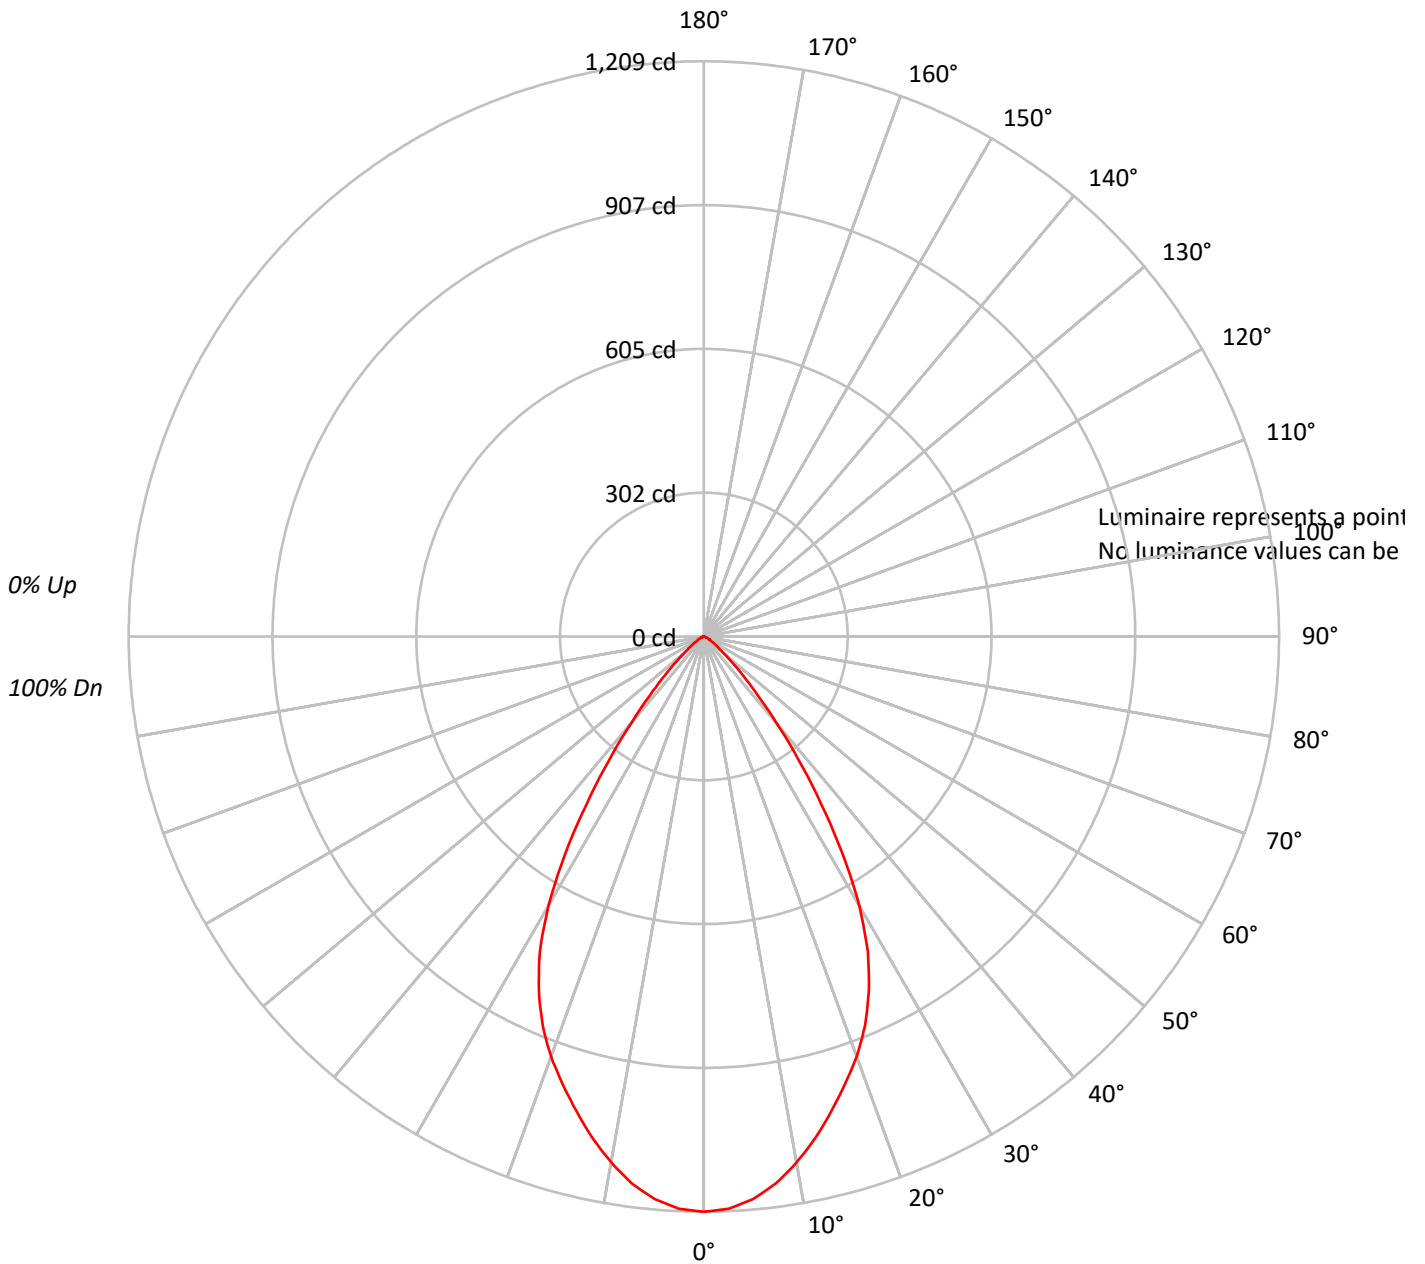



TEST NUMBER: P211995

CATALOG NUMBER: LSR4B30D010BZ EC4B30509730 4LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	88	86																			
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79																			
4	96	88	82	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63																			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																			
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																			
9	73	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	52	51																			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211995

CATALOG NUMBER: LSR4B30D010BZ EC4B30509730 4LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.3	9.5
10°-20°	290.1	24.7
20°-30°	372.1	31.6
30°-40°	269.0	22.9
40°-50°	96.4	8.2
50°-60°	26.0	2.2
60°-70°	8.5	0.7
70°-80°	2.6	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	773.5	65.8
0°-40°	1042.5	88.6
0°-60°	1165.0	99.1
0°-90°	1176.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1176.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1209	
5°	1187	111
15°	1034	290
25°	821	372
35°	430	269
45°	116	96
55°	27	26
65°	7	8
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P211995

CATALOG NUMBER: LSR4B30D010BZ EC4B30509730 4LBMGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1209.2
2.5°	1204.2
5°	1186.9
7.5°	1159.7
10°	1122.6
12.5°	1080.6
15°	1033.6
17.5°	986.6
20°	939.6
22.5°	885.2
25°	820.9
27.5°	746.8
30°	652.8
32.5°	544.0
35°	430.2
37.5°	326.4
40°	237.4
42.5°	168.1
45°	116.2
47.5°	79.1
50°	51.9
52.5°	37.1
55°	27.2
57.5°	19.8
60°	14.8
62.5°	12.4
65°	7.4
67.5°	4.9
70°	4.9
72.5°	2.5
75°	2.5
77.5°	2.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)