

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212053

Luminaire Tested: **LSR4B30D010BZ EC4B30509035 4LBMGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P212053  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B30D010BZ EC4B30509035 4LBMGPH1  
Description: PORTFOLIO 4 INCH CYLINDER  
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W  
DL3-29.67W DLE-29.73W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1364.8 lumens  
Efficiency: N/A  
Efficacy: 48.7 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.92  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P212053

CATALOG NUMBER: LSR4B30D010BZ EC4B30509035 4LBMGPH1

### Luminous Intensity Polar Plot

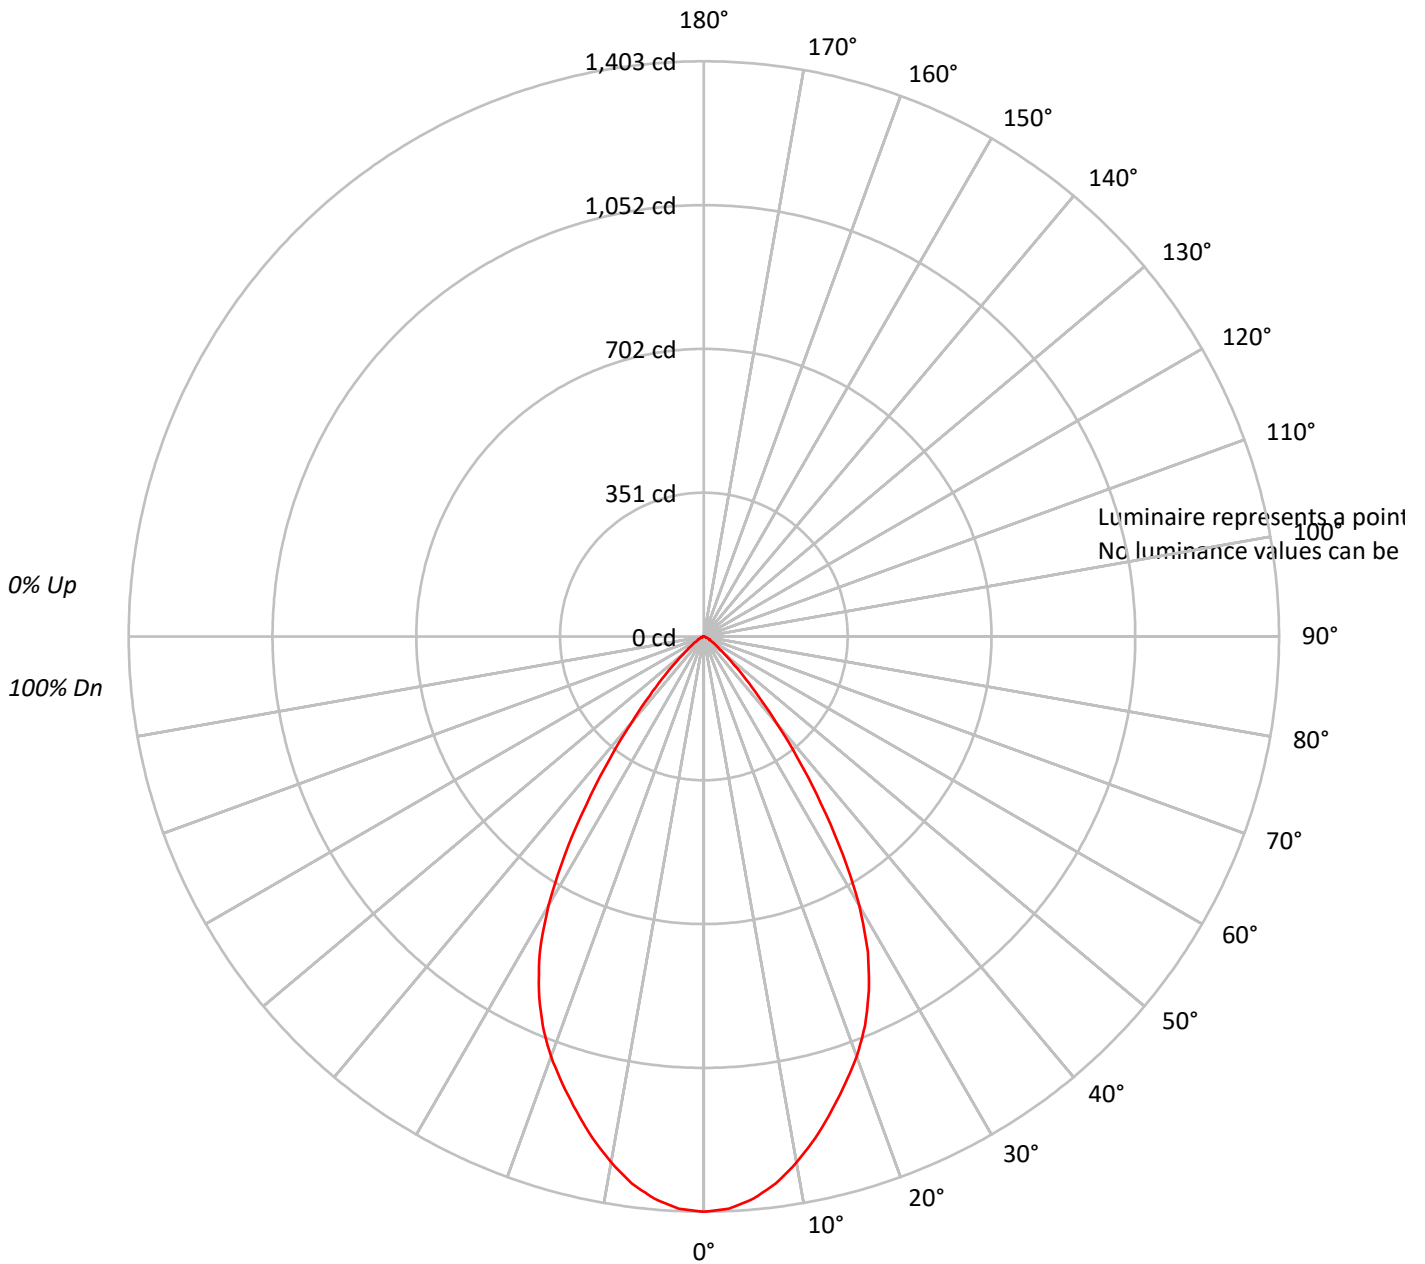



TEST NUMBER: P212053

CATALOG NUMBER: LSR4B30D010BZ EC4B30509035 4LBMGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																					
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			100																	
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			93																	
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	88	86																			86																	
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79																			79																	
4	96	88	82	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73																			73																	
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			68																	
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63																			63																	
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																			59																	
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																			55																	
9	73	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	52	51																			51																	
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	52	49	48																			48																	

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P212053

CATALOG NUMBER: LSR4B30D010BZ EC4B30509035 4LBMGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	129.1	9.5
10°-20°	336.7	24.7
20°-30°	431.8	31.6
30°-40°	312.2	22.9
40°-50°	111.9	8.2
50°-60°	30.2	2.2
60°-70°	9.9	0.7
70°-80°	3.0	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	897.6	65.8
0°-40°	1209.8	88.6
0°-60°	1351.9	99.1
0°-90°	1364.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1364.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1403	
5°	1377	129
15°	1199	337
25°	953	432
35°	499	312
45°	135	112
55°	32	30
65°	9	10
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P212053

CATALOG NUMBER: LSR4B30D010BZ EC4B30509035 4LBMGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1403.1
2.5°	1397.4
5°	1377.3
7.5°	1345.7
10°	1302.7
12.5°	1253.9
15°	1199.4
17.5°	1144.9
20°	1090.4
22.5°	1027.2
25°	952.6
27.5°	866.6
30°	757.5
32.5°	631.3
35°	499.3
37.5°	378.8
40°	275.5
42.5°	195.1
45°	134.9
47.5°	91.8
50°	60.3
52.5°	43.0
55°	31.6
57.5°	23.0
60°	17.2
62.5°	14.3
65°	8.6
67.5°	5.7
70°	5.7
72.5°	2.9
75°	2.9
77.5°	2.9
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)