

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212234

Luminaire Tested: **LSR4B40D010BZ EC4B30508027 4LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P212234
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B40D010BZ EC4B30508027 4LBNH1
Description: PORTFOLIO 4 INCH CYLINDER
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2443.6 lumens
Efficiency: N/A
Efficacy: 58.5 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P212234

CATALOG NUMBER: LSR4B40D010BZ EC4B30508027 4LBNH1

Luminous Intensity Polar Plot

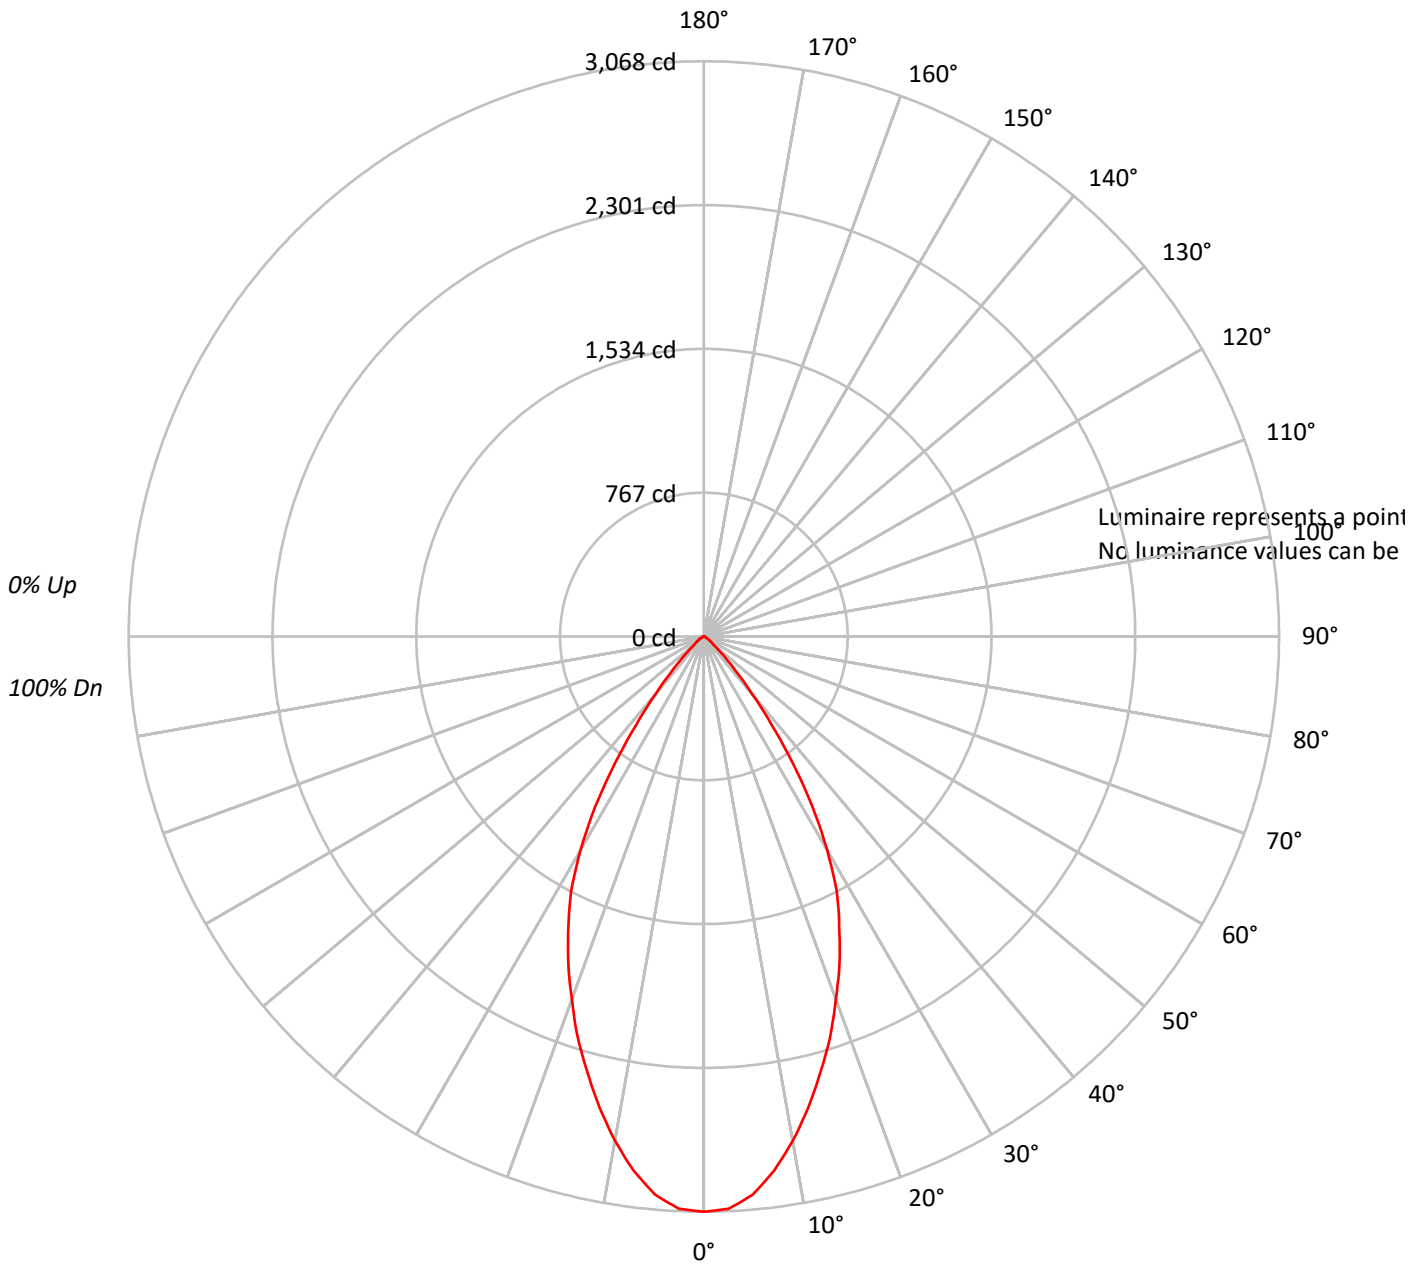



TEST NUMBER: P212234

CATALOG NUMBER: LSR4B40D010BZ EC4B30508027 4LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P212234

CATALOG NUMBER: LSR4B40D010BZ EC4B30508027 4LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.8	11.3
10°-20°	671.5	27.5
20°-30°	779.6	31.9
30°-40°	516.3	21.1
40°-50°	144.8	5.9
50°-60°	36.4	1.5
60°-70°	13.7	0.6
70°-80°	4.6	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1727.9	70.7
0°-40°	2244.1	91.8
0°-60°	2425.3	99.3
0°-90°	2443.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2443.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3068	
5°	2988	277
15°	2404	671
25°	1709	780
35°	828	516
45°	168	145
55°	40	36
65°	13	14
75°	4	5
85°	0	0
90°	0	



TEST NUMBER: P212234

CATALOG NUMBER: LSR4B40D010BZ EC4B30508027 4LBNH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	3068.1
2.5°	3054.8
5°	2988.4
7.5°	2873.3
10°	2731.6
12.5°	2572.2
15°	2404.0
17.5°	2240.2
20°	2058.7
22.5°	1890.4
25°	1708.9
27.5°	1536.3
30°	1314.9
32.5°	1080.2
35°	827.9
37.5°	593.3
40°	402.9
42.5°	261.2
45°	168.2
47.5°	101.8
50°	66.4
52.5°	48.7
55°	39.8
57.5°	31.0
60°	22.1
62.5°	17.7
65°	13.3
67.5°	8.9
70°	8.9
72.5°	4.4
75°	4.4
77.5°	4.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)