

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212262

Luminaire Tested: **LSR4B40D010BZ EC4B30509027 4LBNGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P212262  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B40D010BZ EC4B30509027 4LBNGPH1  
Description: PORTFOLIO 4 INCH CYLINDER  
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W  
DL3-44.71W DLE-39.33W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1572.7 lumens  
Efficiency: N/A  
Efficacy: 37.6 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.88  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P212262

CATALOG NUMBER: LSR4B40D010BZ EC4B30509027 4LBNGPH1

### Luminous Intensity Polar Plot

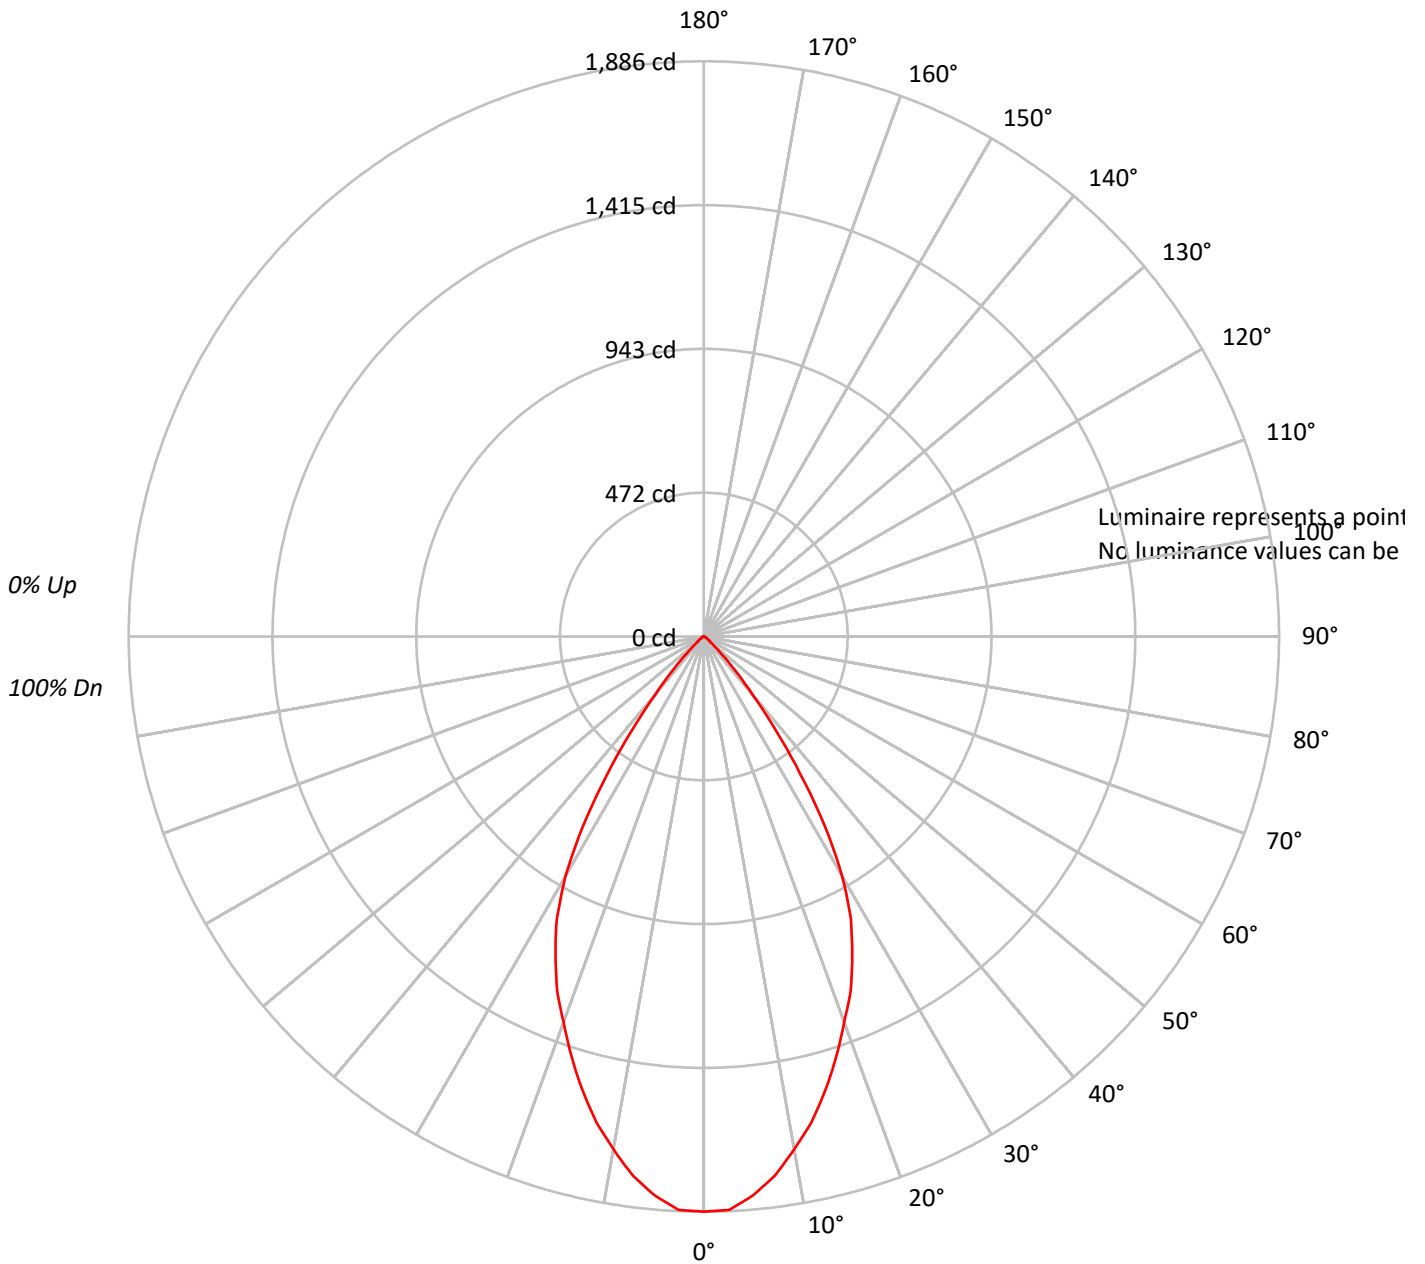



TEST NUMBER: P212262

CATALOG NUMBER: LSR4B40D010BZ EC4B30509027 4LBNGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81																			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																			
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70																			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62																			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58																			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54																			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	52	51																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P212262

CATALOG NUMBER: LSR4B40D010BZ EC4B30509027 4LBNGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	171.5	10.9
10°-20°	429.8	27.3
20°-30°	523.9	33.3
30°-40°	345.6	22.0
40°-50°	79.6	5.1
50°-60°	15.2	1.0
60°-70°	5.6	0.4
70°-80°	1.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1125.2	71.5
0°-40°	1470.8	93.5
0°-60°	1565.6	99.5
0°-90°	1572.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1572.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1886	
5°	1840	171
15°	1539	430
25°	1151	524
35°	552	346
45°	88	80
55°	15	15
65°	4	6
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P212262

CATALOG NUMBER: LSR4B40D010BZ EC4B30509027 4LBNGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1886.0
2.5°	1882.2
5°	1840.3
7.5°	1783.2
10°	1707.0
12.5°	1630.8
15°	1539.3
17.5°	1444.1
20°	1345.0
22.5°	1257.4
25°	1150.7
27.5°	1044.0
30°	906.8
32.5°	739.2
35°	552.5
37.5°	384.8
40°	247.7
42.5°	152.4
45°	87.6
47.5°	45.7
50°	26.7
52.5°	22.9
55°	15.2
57.5°	11.4
60°	11.4
62.5°	7.6
65°	3.8
67.5°	3.8
70°	3.8
72.5°	3.8
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)