

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212289

Luminaire Tested: **LSR4B40D010BZ EC4B30509727 4LBMWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P212289  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B40D010BZ EC4B30509727 4LBMWH1  
Description: PORTFOLIO 4 INCH CYLINDER  
MEDIUM DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W  
DL3-44.71W DLE-39.33W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2241.5 lumens  
Efficiency: N/A  
Efficacy: 53.6 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.87  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P212289

CATALOG NUMBER: LSR4B40D010BZ EC4B30509727 4LBMWH1

### Luminous Intensity Polar Plot

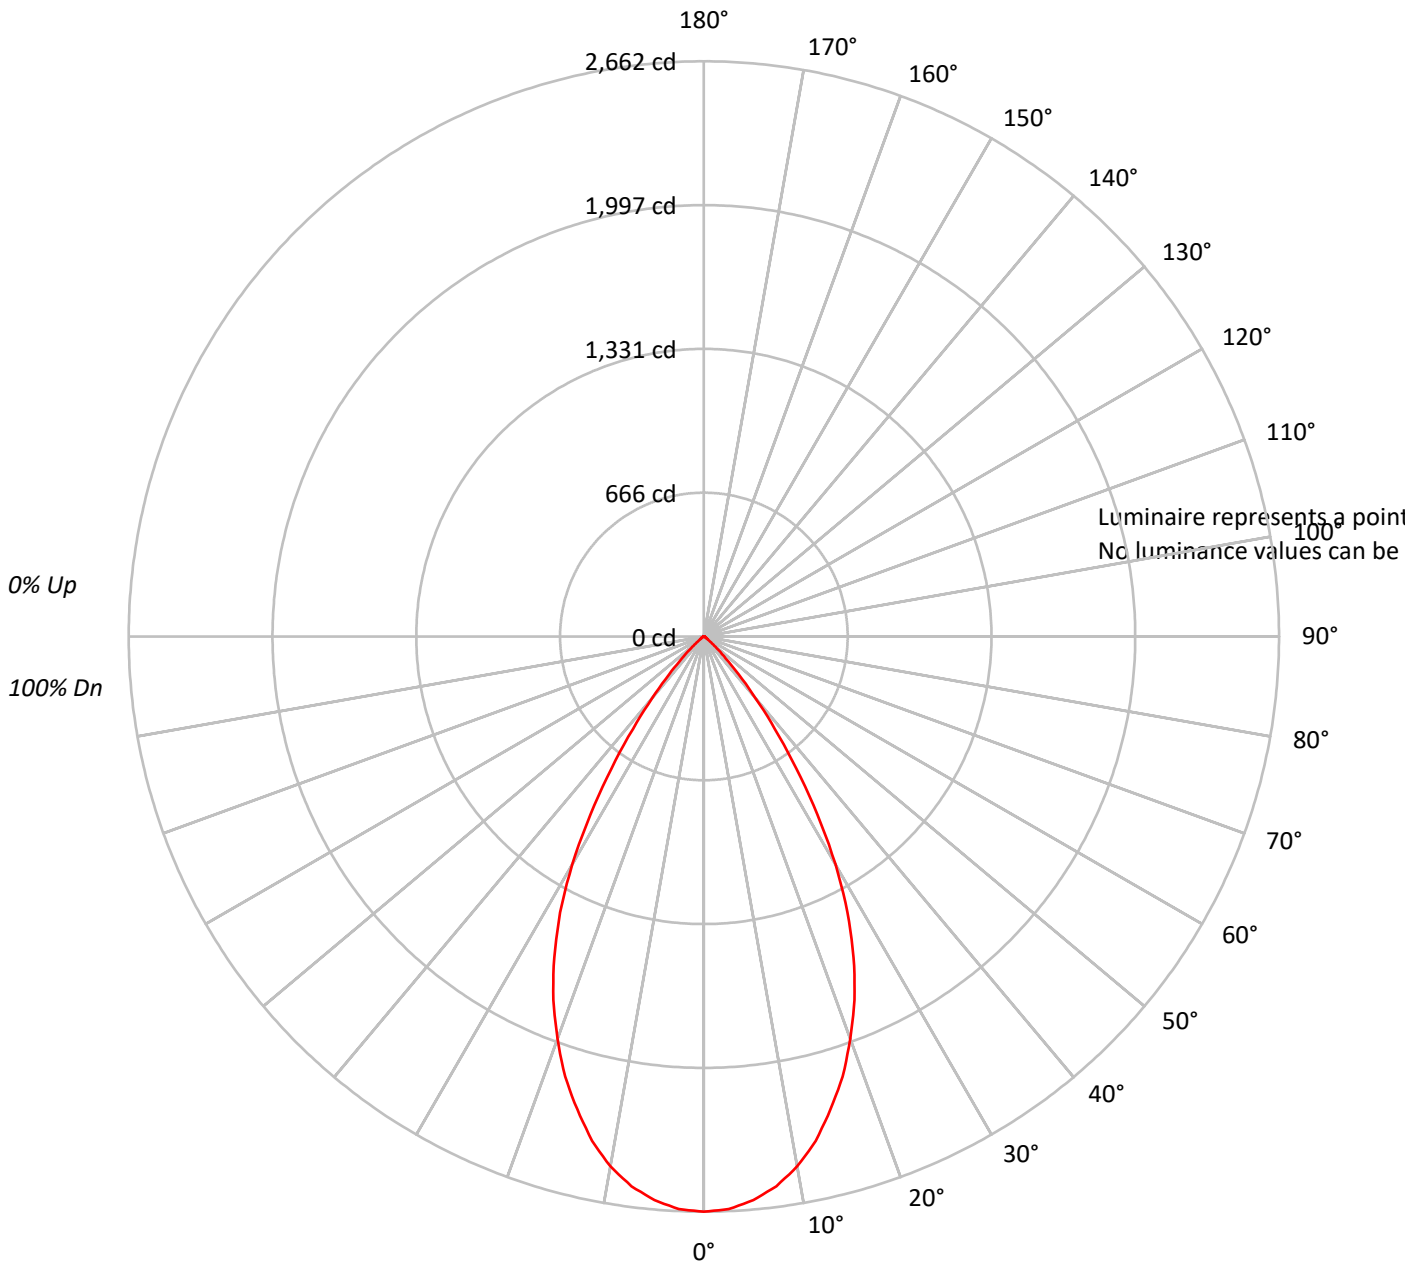



TEST NUMBER: P212289

CATALOG NUMBER: LSR4B40D010BZ EC4B30509727 4LBMWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	105	105	103	101	101	100	98	98	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81																			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76																			
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71																			
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66																			
7	84	75	69	65	82	74	68	64	73	68	64	72	67	64	70	66	63	62																			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58																			
9	76	66	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55																			
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P212289

CATALOG NUMBER: LSR4B40D010BZ EC4B30509727 4LBMWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	245.9	11.0
10°-20°	632.3	28.2
20°-30°	741.8	33.1
30°-40°	469.5	20.9
40°-50°	125.7	5.6
50°-60°	17.6	0.8
60°-70°	6.5	0.3
70°-80°	2.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1620.1	72.3
0°-40°	2089.5	93.2
0°-60°	2232.8	99.6
0°-90°	2241.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2241.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2662	
5°	2619	246
15°	2265	632
25°	1639	742
35°	745	469
45°	142	126
55°	17	18
65°	7	6
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P212289

CATALOG NUMBER: LSR4B40D010BZ EC4B30509727 4LBMWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2662.1
2.5°	2652.2
5°	2619.1
7.5°	2566.1
10°	2490.0
12.5°	2390.6
15°	2264.8
17.5°	2135.7
20°	1980.1
22.5°	1821.1
25°	1639.0
27.5°	1440.3
30°	1218.5
32.5°	976.8
35°	745.0
37.5°	539.7
40°	370.8
42.5°	238.4
45°	142.4
47.5°	79.5
50°	43.0
52.5°	23.2
55°	16.6
57.5°	13.2
60°	9.9
62.5°	9.9
65°	6.6
67.5°	3.3
70°	3.3
72.5°	3.3
75°	3.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)