

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212421

Luminaire Tested: **LSR4B40D010BZ EC4B30508035 4LBWB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P212421
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B40D010BZ EC4B30508035 4LBWB1
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2047.7 lumens
Efficiency: N/A
Efficacy: 49.0 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.03
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P212421

CATALOG NUMBER: LSR4B40D010BZ EC4B30508035 4LBWB1

Luminous Intensity Polar Plot

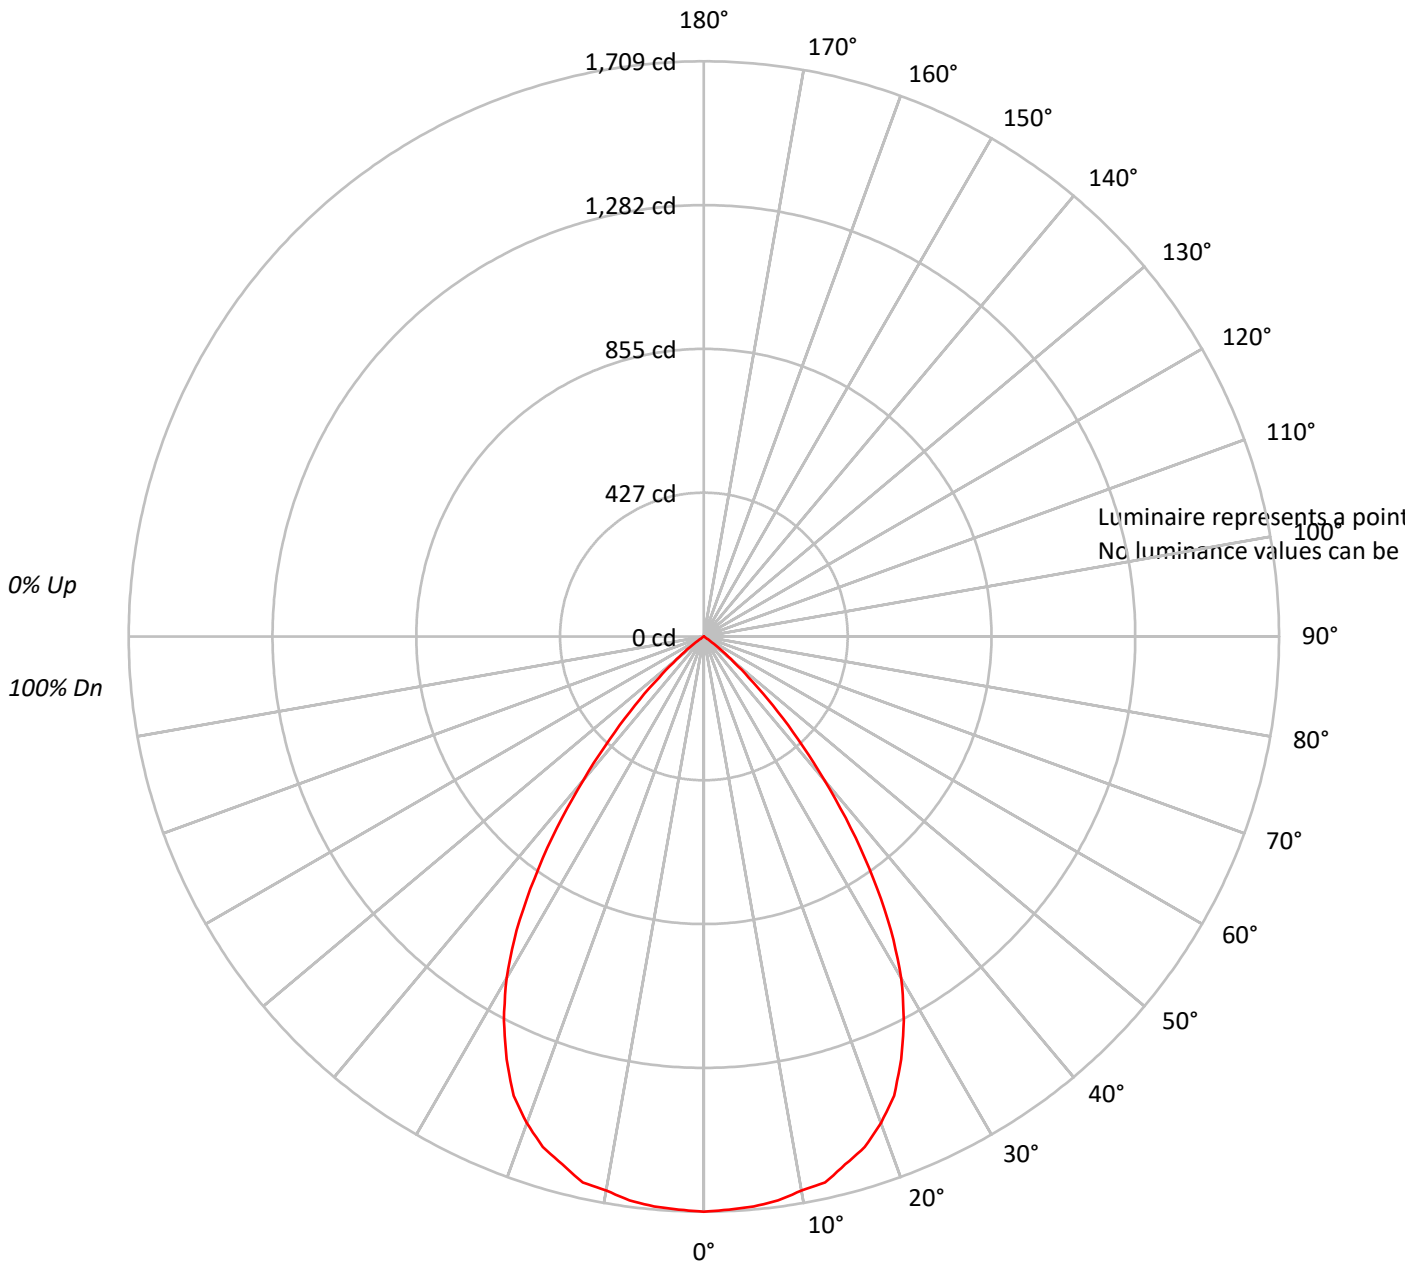



TEST NUMBER: P212421

CATALOG NUMBER: LSR4B40D010BZ EC4B30508035 4LBWB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79	79	
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72	72	
5	90	81	75	70	89	80	74	70	79	73	69	77	72	69	75	71	68	67	67	
6	85	76	69	65	84	75	69	64	73	68	64	72	67	64	70	66	63	62	62	
7	80	71	64	60	79	70	64	59	69	63	59	67	62	59	66	62	58	57	57	
8	76	66	60	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53	53	
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49	49	
10	68	58	52	48	67	58	52	48	57	51	47	56	51	47	55	50	47	46	46	

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P212421

CATALOG NUMBER: LSR4B40D010BZ EC4B30508035 4LBWB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.4	7.9
10°-20°	457.3	22.3
20°-30°	632.0	30.9
30°-40°	541.2	26.4
40°-50°	230.0	11.2
50°-60°	25.7	1.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1250.8	61.1
0°-40°	1791.9	87.5
0°-60°	2047.7	100.0
0°-90°	2047.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2047.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1709	
5°	1700	161
15°	1624	457
25°	1386	632
35°	878	541
45°	290	230
55°	14	26
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P212421

CATALOG NUMBER: LSR4B40D010BZ EC4B30508035 4LBWB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1709.3
2.5°	1704.5
5°	1699.8
7.5°	1690.3
10°	1671.3
12.5°	1661.8
15°	1623.8
17.5°	1590.6
20°	1538.4
22.5°	1476.6
25°	1386.4
27.5°	1286.7
30°	1172.8
32.5°	1035.1
35°	878.4
37.5°	716.9
40°	555.5
42.5°	413.1
45°	289.6
47.5°	180.4
50°	104.5
52.5°	52.2
55°	14.2
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)