

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212561

Luminaire Tested: **LSR4B40D010BZ EC4B30509050 4LBSLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P212561
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B40D010BZ EC4B30509050 4LBSLI1
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3648.5 lumens
Efficiency: N/A
Efficacy: 87.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P212561

CATALOG NUMBER: LSR4B40D010BZ EC4B30509050 4LBSLI1

Luminous Intensity Polar Plot

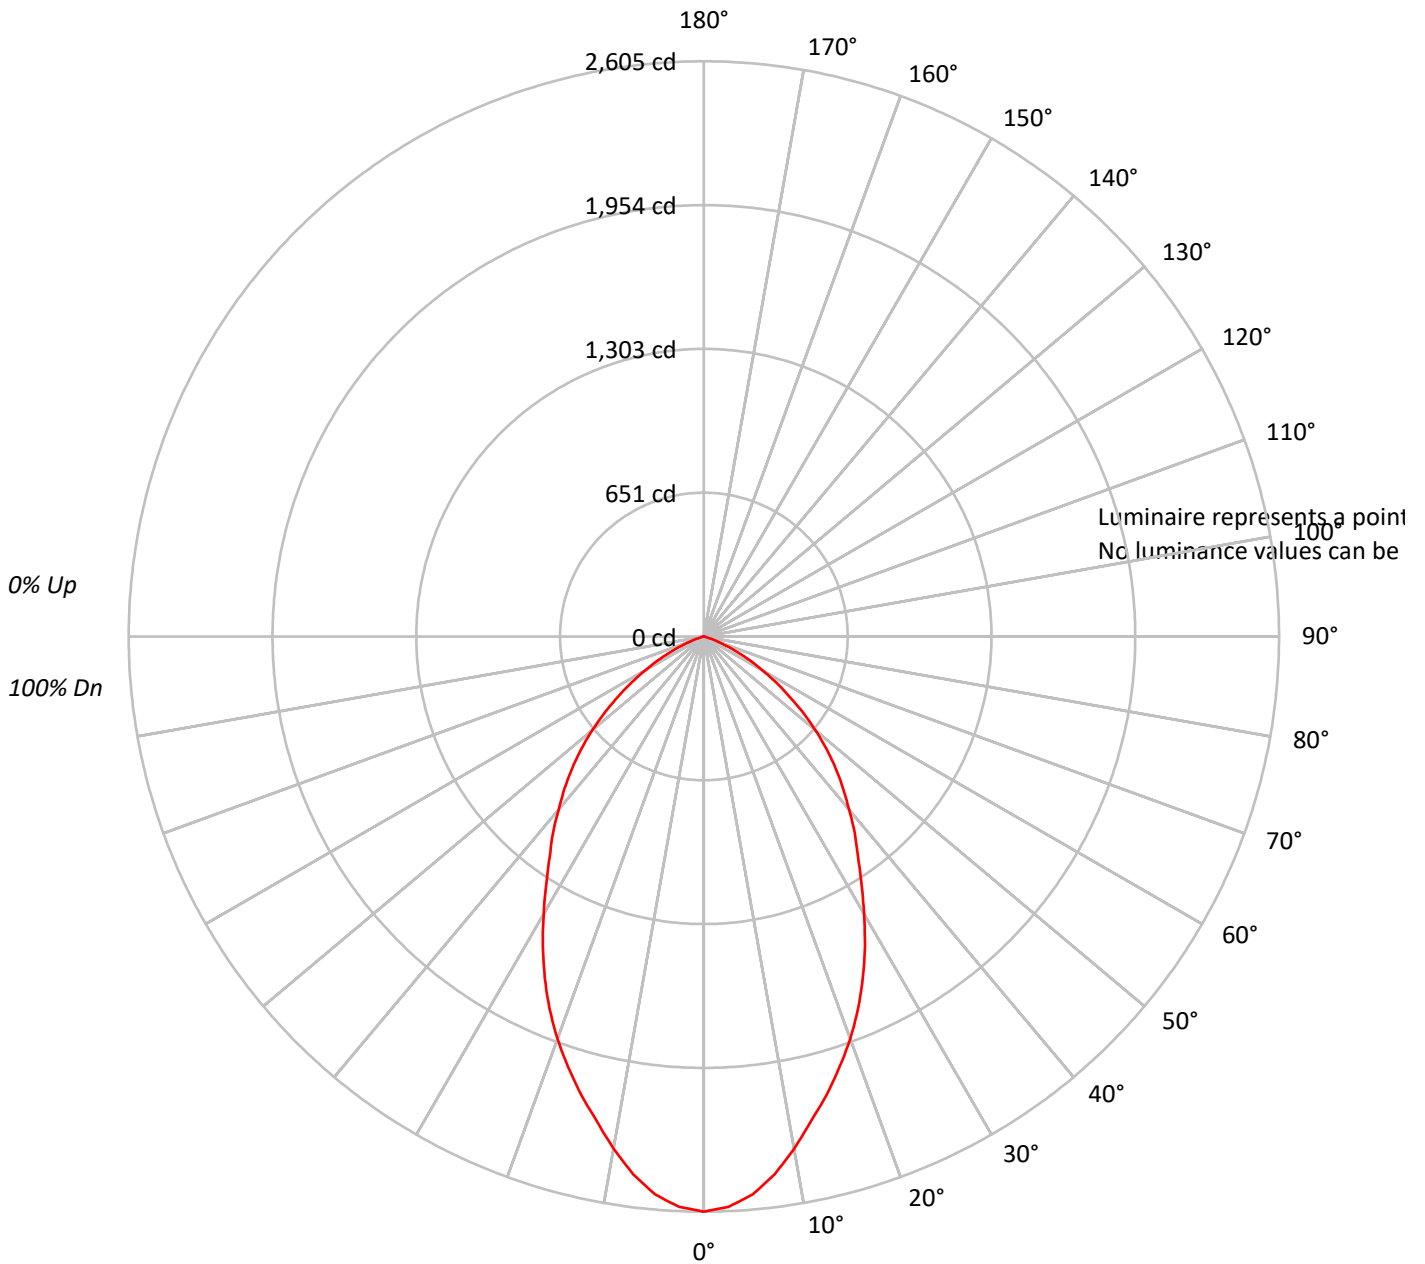



TEST NUMBER: P212561

CATALOG NUMBER: LSR4B40D010BZ EC4B30509050 4LBSLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90																			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80																			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71																			
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63																			
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57																			
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51																			
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46																			
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42																			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39																			
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P212561

CATALOG NUMBER: LSR4B40D010BZ EC4B30509050 4LBSLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	236.2	6.5
10°-20°	602.4	16.5
20°-30°	780.7	21.4
30°-40°	764.9	21.0
40°-50°	648.4	17.8
50°-60°	425.0	11.6
60°-70°	170.9	4.7
70°-80°	19.5	0.5
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1619.3	44.4
0°-40°	2384.2	65.3
0°-60°	3457.6	94.8
0°-90°	3648.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3648.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2605	
5°	2536	236
15°	2149	602
25°	1704	781
35°	1216	765
45°	844	648
55°	473	425
65°	166	171
75°	8	20
85°	0	1
90°	0	



TEST NUMBER: P212561

CATALOG NUMBER: LSR4B40D010BZ EC4B30509050 4LBSLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2605.1
2.5°	2585.0
5°	2536.5
7.5°	2455.7
10°	2354.7
12.5°	2245.7
15°	2148.7
17.5°	2043.7
20°	1938.7
22.5°	1825.6
25°	1704.5
27.5°	1579.2
30°	1450.0
32.5°	1328.8
35°	1215.7
37.5°	1122.8
40°	1021.9
42.5°	933.0
45°	844.1
47.5°	751.3
50°	658.4
52.5°	565.5
55°	472.6
57.5°	387.7
60°	307.0
62.5°	234.3
65°	165.6
67.5°	109.1
70°	64.6
72.5°	28.3
75°	8.1
77.5°	4.0
80°	4.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)