

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P429770

Luminaire Tested: **LAM4B112R159027DE010x1MMS**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P429770
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1911-585-6)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAM4B112R159027DE010x1MMS
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 15 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1124.7 lumens
Efficiency: N/A
Efficacy: 78.7 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.29' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P429770

CATALOG NUMBER: LAM4B112R159027DE010x1MMS

Luminous Intensity Polar Plot

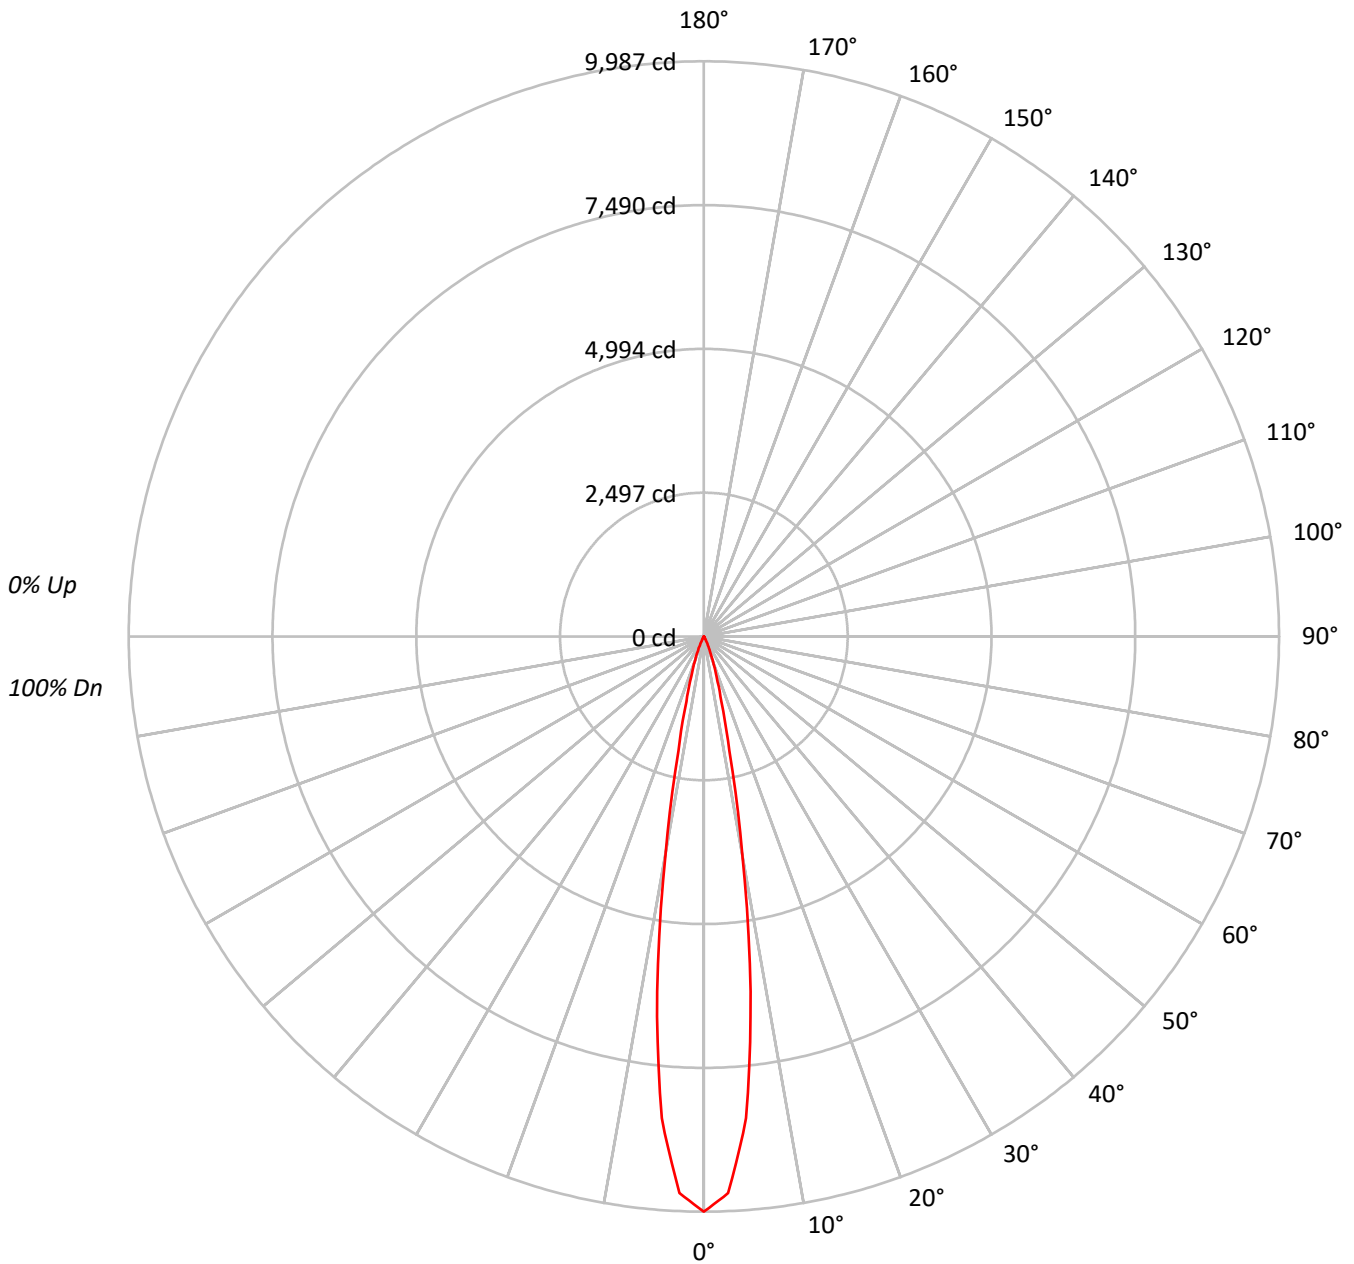



TEST NUMBER: P429770

CATALOG NUMBER: LAM4B112R159027DE010x1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																
	1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98	98	98	98	98	98	98	98	98	98	98	98															
	2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	99	98	96	96	96	96	96	96	96	96	96	96	96	96															
	3	110	106	103	101	108	105	102	100	103	100	98	100	99	97	98	97	96	94	94	94	94	94	94	94	94	94	94	94	94															
	4	108	103	100	97	106	102	99	97	100	98	96	98	96	95	97	95	94	92	92	92	92	92	92	92	92	92	92	92	92															
	5	105	101	97	95	104	100	97	94	98	96	94	97	95	93	95	94	92	90	90	90	90	90	90	90	90	90	90	90	90															
	6	103	98	95	92	102	98	94	92	96	94	92	95	93	91	94	92	91	89	89	89	89	89	89	89	89	89	89	89	89															
	7	101	96	93	90	100	96	92	90	95	92	90	94	91	89	93	91	89	87	87	87	87	87	87	87	87	87	87	87	87															
	8	99	94	91	89	99	94	91	89	93	90	88	92	90	88	91	89	88	86	86	86	86	86	86	86	86	86	86	86	86															
	9	98	92	89	87	97	92	89	87	91	89	87	91	88	87	90	88	86	84	84	84	84	84	84	84	84	84	84	84	84															
	10	96	91	88	86	95	91	88	86	90	87	85	89	87	85	89	87	85	83	83	83	83	83	83	83	83	83	83	83	83															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1608879
5°	1357843
10°	623814
15°	194524
20°	79258
25°	26006
30°	8055
35°	1711
40°	421
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P429770

CATALOG NUMBER: LAM4B112R159027DE010x1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	647.9	57.6
10°-20°	386.1	34.3
20°-30°	81.8	7.3
30°-40°	8.6	0.8
40°-50°	0.3	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1115.9	99.2
0°-40°	1124.5	100.0
0°-60°	1124.7	100.0
0°-90°	1124.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1124.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9987	
5°	8396	648
15°	1166	386
25°	146	82
35°	9	9
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P429770

CATALOG NUMBER: LAM4B112R159027DE010x1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	9986.6
2.5°	9671.1
5°	8396.3
7.5°	6215.7
10°	3813.3
12.5°	2034.8
15°	1166.3
17.5°	732.5
20°	462.3
22.5°	272.7
25°	146.3
27.5°	82.6
30°	43.3
32.5°	21.9
35°	8.7
37.5°	4.6
40°	2.0
42.5°	0.5
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)