

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P429914

Luminaire Tested: **LAM4B112R459027DE010x1MMS**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P429914
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-908-8)
Test Lab: INNOVATION CENTER (G2)
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAM4B112R459027DE010x1MMS
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 45 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1131.7 lumens
Efficiency: N/A
Efficacy: 79.1 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.66
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P429914

CATALOG NUMBER: LAM4B112R459027DE010x1MMS

Luminous Intensity Polar Plot

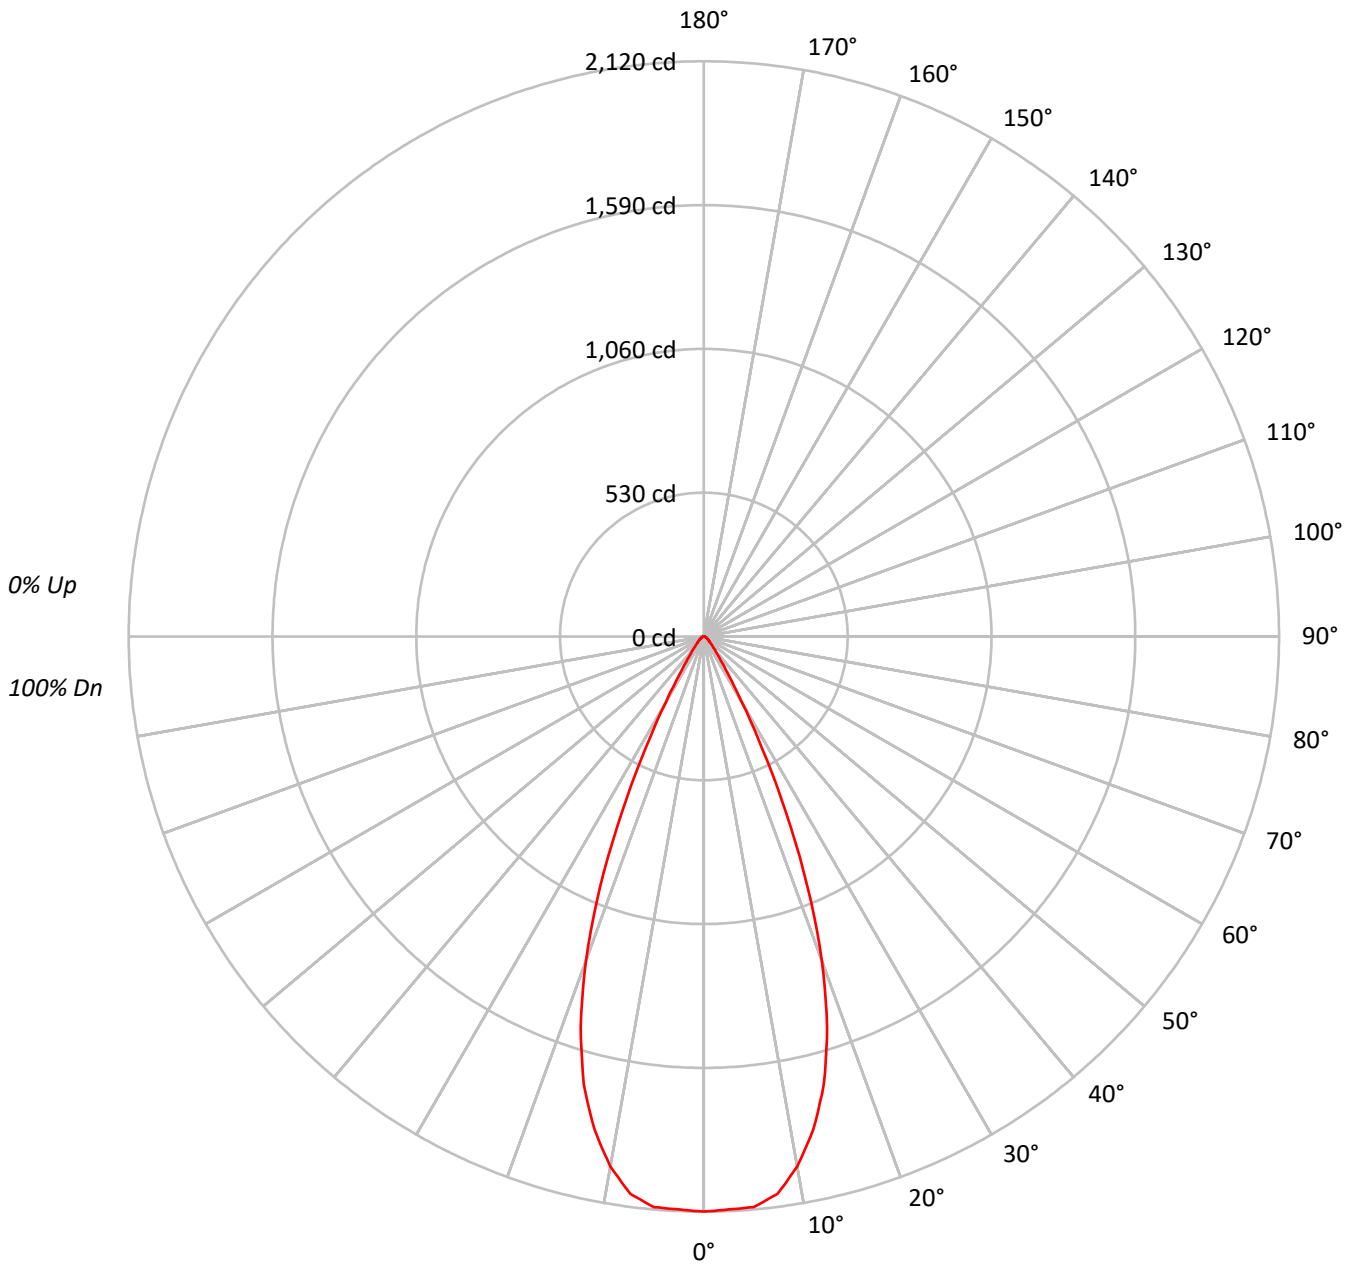



TEST NUMBER: P429914

CATALOG NUMBER: LAM4B112R459027DE010x1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	89	89	89	89
3	105	99	94	91	103	98	93	90	95	92	89	93	90	87	90	88	86	85	85	85	85
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80	80	80	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76	76	76	76
6	92	85	79	76	91	84	79	75	82	78	75	81	77	74	80	77	74	73	73	73	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	65	63	63	63	63
10	79	71	66	62	78	70	66	62	70	65	62	69	65	62	68	65	62	61	61	61	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1045718
5°	1045404
10°	993665
15°	872828
20°	667698
25°	389779
30°	159518
35°	67458
40°	36776
45°	23723
50°	18575
55°	16085
60°	13025
65°	10273
70°	9521
75°	8388
80°	9376
85°	6227



TEST NUMBER: P429914

CATALOG NUMBER: LAM4B112R459027DE010x1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	197.5	17.5
10°-20°	465.2	41.1
20°-30°	327.8	29.0
30°-40°	80.7	7.1
40°-50°	28.2	2.5
50°-60°	16.7	1.5
60°-70°	9.2	0.8
70°-80°	5.1	0.4
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	990.5	87.5
0°-40°	1071.2	94.7
0°-60°	1116.0	98.6
0°-90°	1131.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1131.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2120	
5°	2111	198
15°	1709	465
25°	716	328
35°	112	81
45°	34	28
55°	19	17
65°	9	9
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P429914

CATALOG NUMBER: LAM4B112R459027DE010x1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	2119.5
2.5°	2114.0
5°	2110.8
7.5°	2072.3
10°	1983.4
12.5°	1862.6
15°	1708.8
17.5°	1510.0
20°	1271.7
22.5°	998.3
25°	716.0
27.5°	462.3
30°	280.0
32.5°	170.2
35°	112.0
37.5°	79.1
40°	57.1
42.5°	43.9
45°	34.0
47.5°	28.6
50°	24.2
52.5°	20.9
55°	18.7
57.5°	16.5
60°	13.2
62.5°	11.0
65°	8.8
67.5°	7.7
70°	6.6
72.5°	5.5
75°	4.4
77.5°	4.4
80°	3.3
82.5°	2.2
85°	1.1
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)