

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P429829

Luminaire Tested: **LAM4B112R259050DE010x1MB**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P429829
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1911-585-5)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAM4B112R259050DE010x1MB
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 25 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1280.1 lumens
Efficiency: N/A
Efficacy: 89.5 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.29' x H: 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P429829

CATALOG NUMBER: LAM4B112R259050DE010x1MB

Luminous Intensity Polar Plot

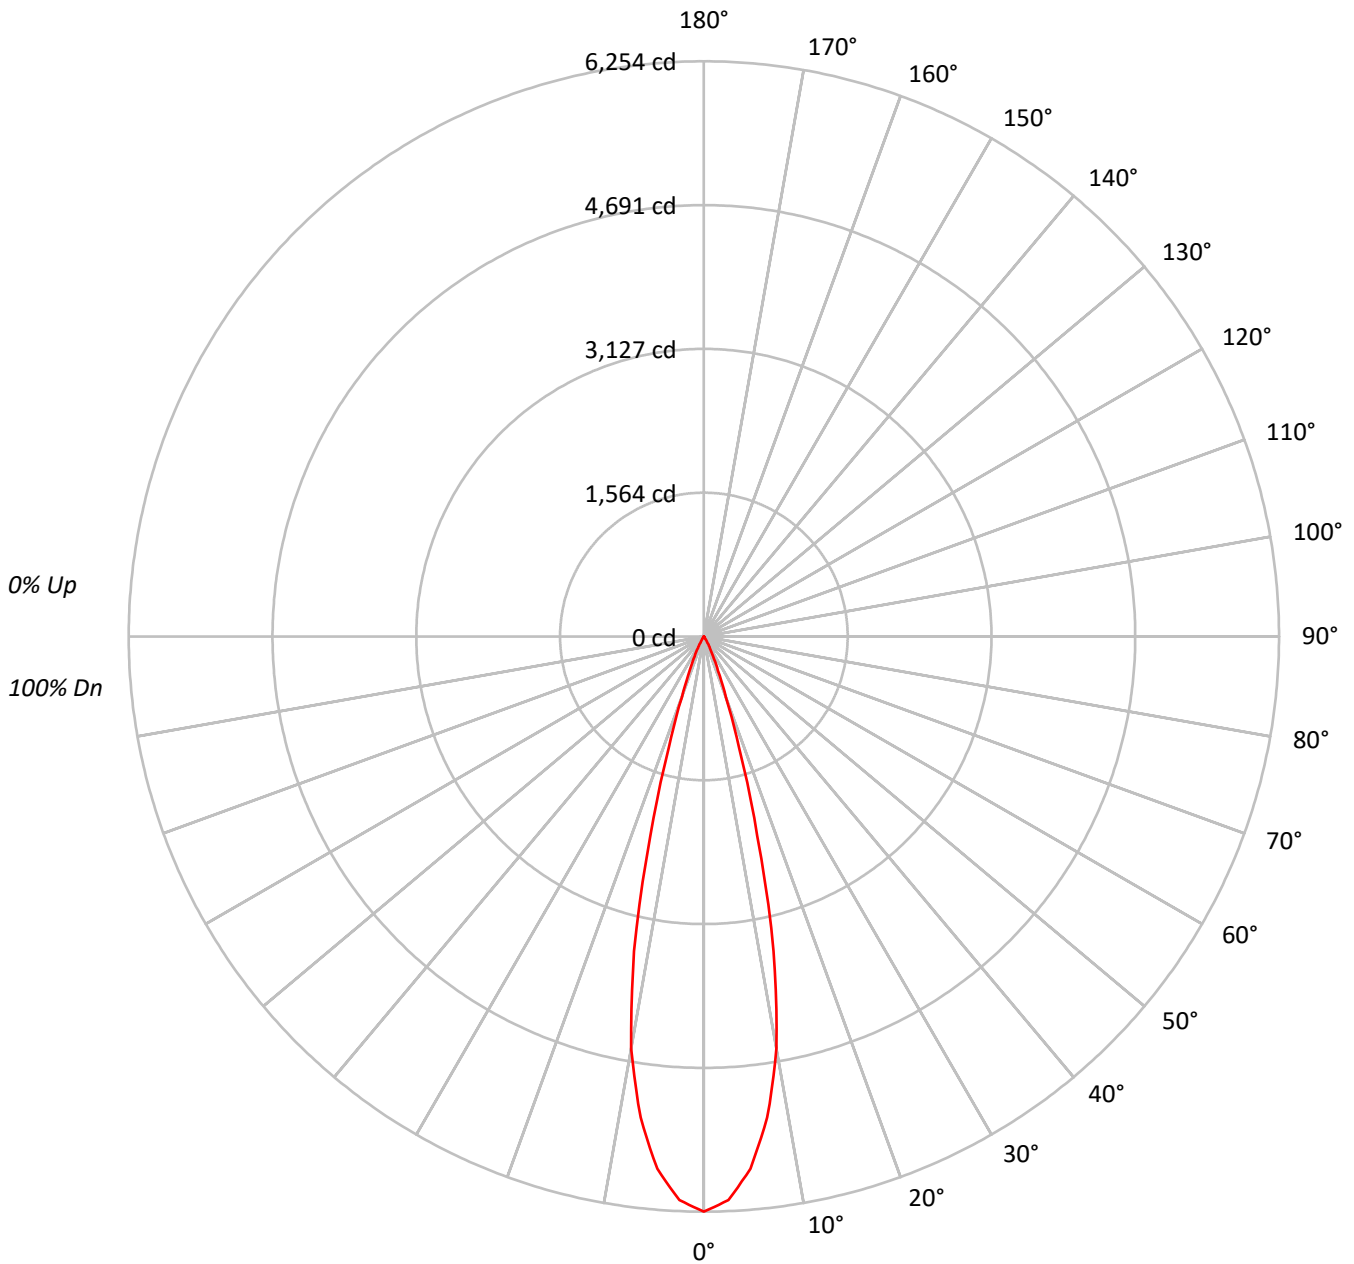



TEST NUMBER: P429829

CATALOG NUMBER: LAM4B112R259050DE010x1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|-----|----|----|---|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 | | | | | | | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | 100 | | | | | | | | | | | | | | | | | | |
| 1 | 115 | 113 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99 | 97 | | | | | | | | | 97 | | | | | | | | | | | | | | | | | | |
| 2 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 104 | 102 | 100 | 101 | 99 | 98 | 98 | 97 | 96 | 95 | | | | | | | | | 95 | | | | | | | | | | | | | | | | | | |
| 3 | 109 | 104 | 101 | 99 | 107 | 103 | 100 | 98 | 101 | 98 | 96 | 99 | 96 | 95 | 96 | 95 | 93 | 92 | | | | | | | | | 92 | | | | | | | | | | | | | | | | | | |
| 4 | 106 | 101 | 97 | 95 | 104 | 100 | 97 | 94 | 98 | 95 | 93 | 96 | 94 | 92 | 94 | 93 | 91 | 90 | | | | | | | | | 90 | | | | | | | | | | | | | | | | | | |
| 5 | 103 | 98 | 94 | 91 | 102 | 97 | 93 | 91 | 95 | 92 | 90 | 94 | 91 | 89 | 92 | 90 | 89 | 88 | | | | | | | | | 88 | | | | | | | | | | | | | | | | | | |
| 6 | 100 | 95 | 91 | 88 | 99 | 94 | 91 | 88 | 93 | 90 | 87 | 92 | 89 | 87 | 91 | 88 | 86 | 85 | | | | | | | | | 85 | | | | | | | | | | | | | | | | | | |
| 7 | 98 | 92 | 88 | 86 | 97 | 92 | 88 | 86 | 91 | 87 | 85 | 90 | 87 | 85 | 89 | 86 | 84 | 83 | | | | | | | | | 83 | | | | | | | | | | | | | | | | | | |
| 8 | 96 | 90 | 86 | 83 | 95 | 89 | 86 | 83 | 88 | 85 | 83 | 88 | 85 | 83 | 87 | 84 | 82 | 81 | | | | | | | | | 81 | | | | | | | | | | | | | | | | | | |
| 9 | 94 | 88 | 84 | 81 | 93 | 87 | 84 | 81 | 86 | 83 | 81 | 86 | 83 | 81 | 85 | 82 | 81 | 80 | | | | | | | | | 80 | | | | | | | | | | | | | | | | | | |
| 10 | 91 | 85 | 82 | 79 | 91 | 85 | 82 | 79 | 84 | 81 | 79 | 84 | 81 | 79 | 83 | 81 | 79 | 78 | | | | | | | | | 78 | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 1007463 |
| 5° | 939427 |
| 10° | 743872 |
| 15° | 374370 |
| 20° | 120130 |
| 25° | 42004 |
| 30° | 14064 |
| 35° | 2832 |
| 40° | 925 |
| 45° | 0 |
| 50° | 0 |
| 55° | 0 |
| 60° | 0 |
| 65° | 0 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P429829

CATALOG NUMBER: LAM4B112R259050DE010x1MB

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 514.3 | 40.2 |
| 10°-20° | 623.8 | 48.7 |
| 20°-30° | 126.9 | 9.9 |
| 30°-40° | 14.4 | 1.1 |
| 40°-50° | 0.7 | 0.1 |
| 50°-60° | 0.0 | 0.0 |
| 60°-70° | 0.0 | 0.0 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1265.0 | 98.8 |
| 0°-40° | 1279.4 | 99.9 |
| 0°-60° | 1280.1 | 100.0 |
| 0°-90° | 1280.1 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1280.1 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 6254 | |
| 5° | 5809 | 514 |
| 15° | 2245 | 624 |
| 25° | 236 | 127 |
| 35° | 14 | 14 |
| 45° | 0 | 1 |
| 55° | 0 | 0 |
| 65° | 0 | 0 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P429829

CATALOG NUMBER: LAM4B112R259050DE010x1MB

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 6253.5 |
| 2.5° | 6132.6 |
| 5° | 5809.0 |
| 7.5° | 5275.0 |
| 10° | 4547.2 |
| 12.5° | 3504.7 |
| 15° | 2244.6 |
| 17.5° | 1264.5 |
| 20° | 700.7 |
| 22.5° | 399.2 |
| 25° | 236.3 |
| 27.5° | 141.4 |
| 30° | 75.6 |
| 32.5° | 33.1 |
| 35° | 14.4 |
| 37.5° | 8.8 |
| 40° | 4.4 |
| 42.5° | 1.7 |
| 45° | 0.0 |
| 47.5° | 0.0 |
| 50° | 0.0 |
| 52.5° | 0.0 |
| 55° | 0.0 |
| 57.5° | 0.0 |
| 60° | 0.0 |
| 62.5° | 0.0 |
| 65° | 0.0 |
| 67.5° | 0.0 |
| 70° | 0.0 |
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)