

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P429997

Luminaire Tested: **LAM4B112R609050DE010x1MB**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P429997  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2009-969-1)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAM4B112R609050DE010x1MB  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 60 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1189.2 lumens  
Efficiency: N/A  
Efficacy: 83.2 lumens/watt  
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.89  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P429997

CATALOG NUMBER: LAM4B112R609050DE010x1MB

### Luminous Intensity Polar Plot

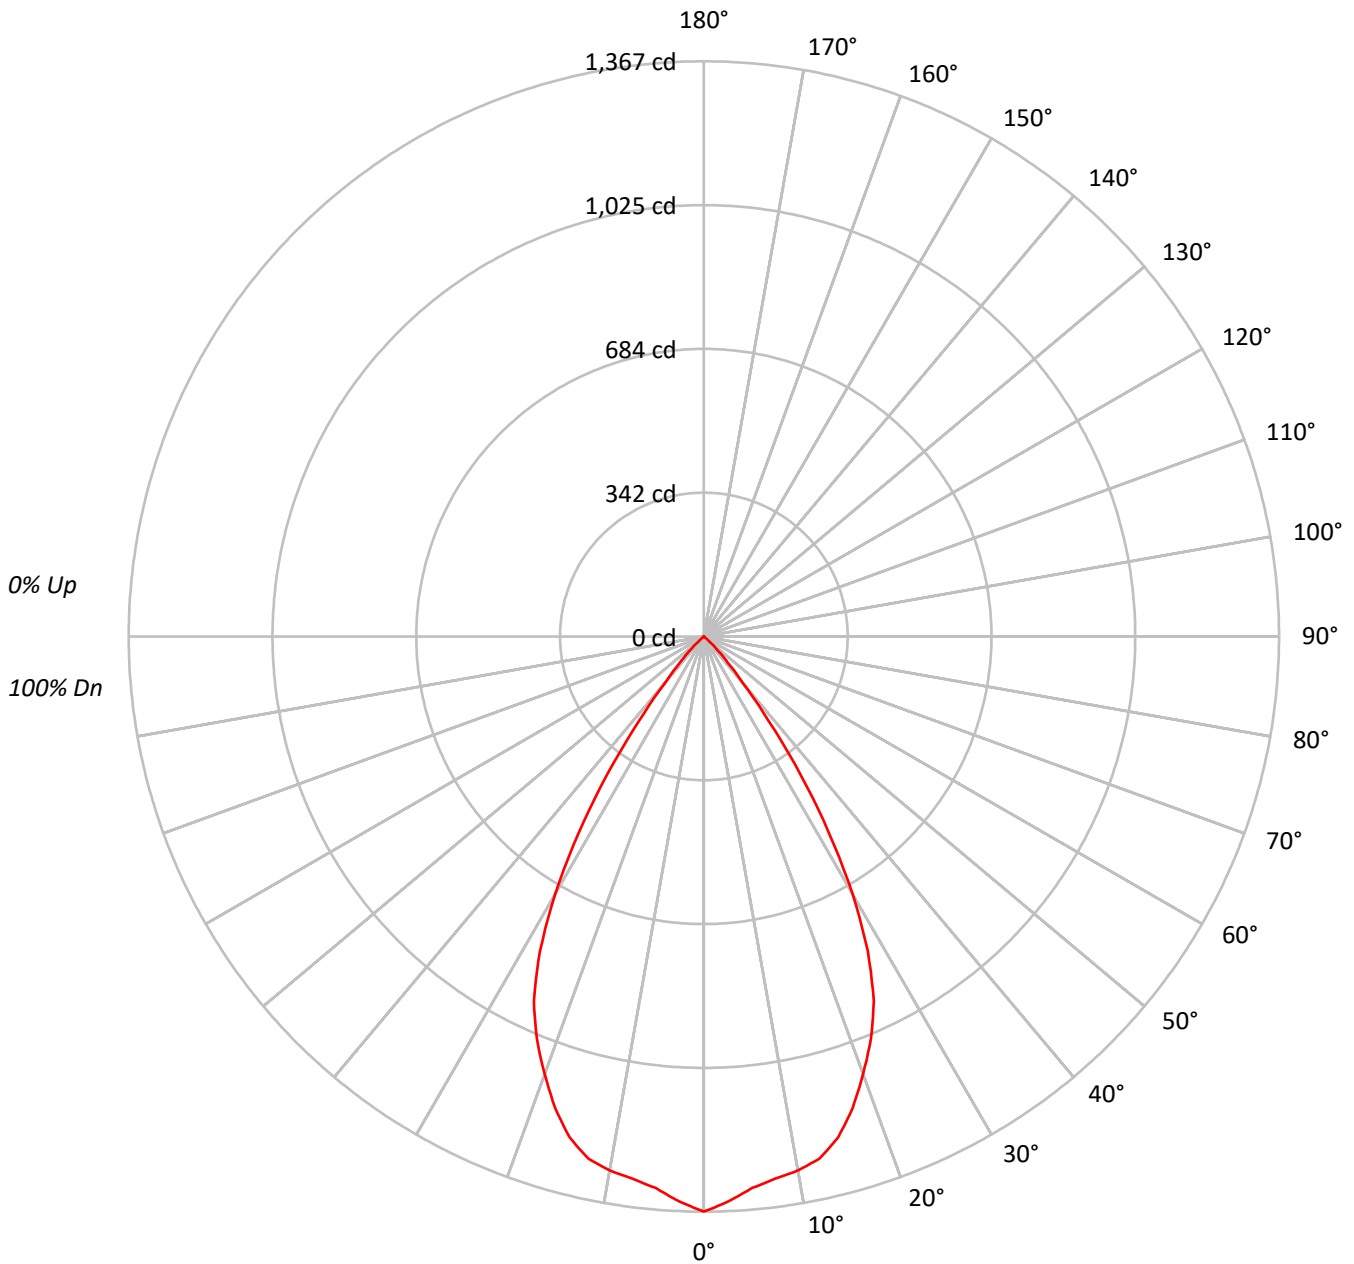



TEST NUMBER: P429997

CATALOG NUMBER: LAM4B112R609050DE010x1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94		
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88		
3	103	97	92	88	101	96	91	88	93	89	86	91	87	85	88	86	84	82		
4	98	91	85	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77		
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72		
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	69	67		
7	84	75	70	66	83	75	69	65	74	69	65	72	68	65	71	67	64	63		
8	80	71	65	61	79	71	65	61	70	65	61	69	64	61	68	64	60	59		
9	77	67	62	58	76	67	61	58	66	61	57	65	60	57	64	60	57	56		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	52		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	674252
5°	651669
10°	645577
15°	629541
20°	581013
25°	520322
30°	402611
35°	241163
40°	92680
45°	33841
50°	1305
55°	1032
60°	1184
65°	700
70°	866
75°	1144
80°	1705
85°	0



TEST NUMBER: P429997

CATALOG NUMBER: LAM4B112R609050DE010x1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	124.9	10.5
10°-20°	342.9	28.8
20°-30°	427.8	36.0
30°-40°	249.2	21.0
40°-50°	41.6	3.5
50°-60°	1.1	0.1
60°-70°	0.8	0.1
70°-80°	0.6	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	895.6	75.3
0°-40°	1144.8	96.3
0°-60°	1187.5	99.9
0°-90°	1189.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1189.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1367	
5°	1316	125
15°	1232	343
25°	956	428
35°	400	249
45°	48	42
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P429997

CATALOG NUMBER: LAM4B112R609050DE010x1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1366.6
2.5°	1344.1
5°	1315.8
7.5°	1299.6
10°	1288.6
12.5°	1270.7
15°	1232.5
17.5°	1175.3
20°	1106.6
22.5°	1036.7
25°	955.8
27.5°	843.7
30°	706.7
32.5°	553.6
35°	400.4
37.5°	252.5
40°	143.9
42.5°	84.4
45°	48.5
47.5°	16.8
50°	1.7
52.5°	1.2
55°	1.2
57.5°	1.2
60°	1.2
62.5°	1.2
65°	0.6
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)