

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P431005

Luminaire Tested: **LAMR4B112R309050DE010x1MB**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P431005  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-8)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAMR4B112R309050DE010x1MB  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 30 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1273.8 lumens  
Efficiency: N/A  
Efficacy: 89.1 lumens/watt  
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.46  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P431005

CATALOG NUMBER: LAMR4B112R309050DE010x1MB

### Luminous Intensity Polar Plot

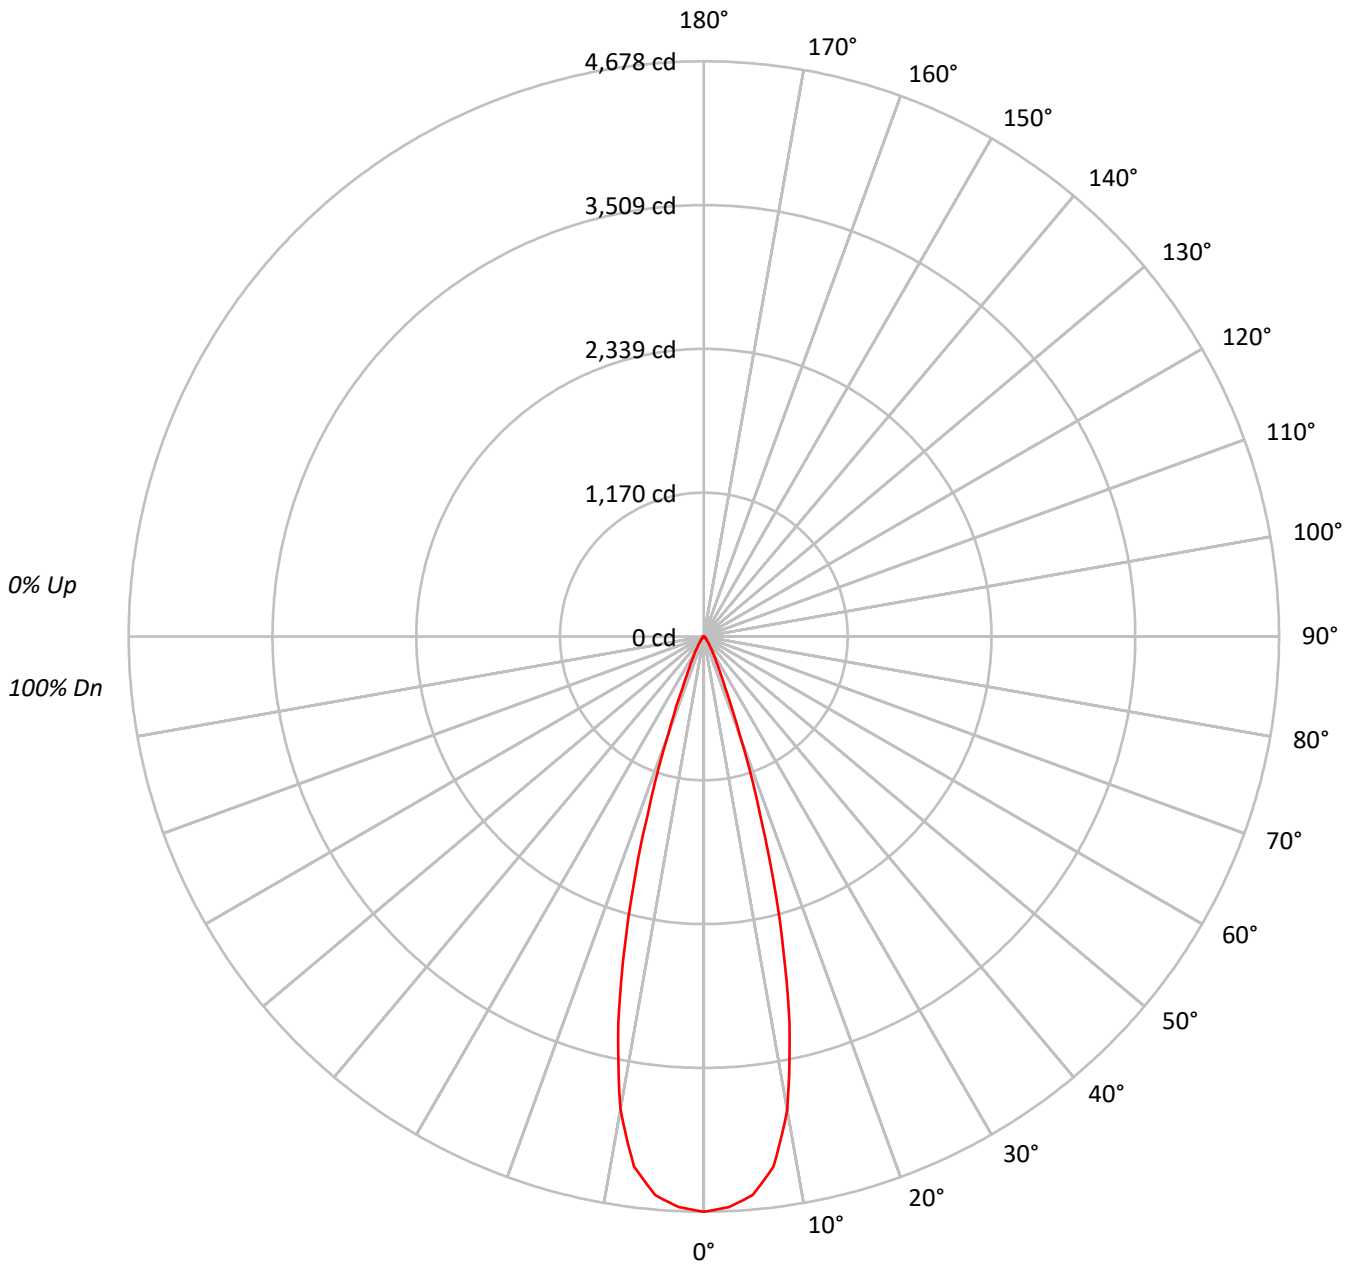



TEST NUMBER: P431005

CATALOG NUMBER: LAMR4B112R309050DE010x1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	95	94	93
3	107	103	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	90
4	104	98	94	91	102	97	94	91	95	92	90	93	91	89	92	90	88	87
5	101	95	91	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84
6	98	91	87	84	97	91	87	84	89	86	83	88	85	83	87	84	82	81
7	95	88	84	81	94	88	84	81	87	83	81	86	83	80	85	82	80	79
8	92	86	81	79	91	85	81	78	84	81	78	83	80	78	83	80	78	77
9	90	83	79	76	89	83	79	76	82	78	76	81	78	76	80	78	75	74
10	88	81	77	74	87	80	77	74	80	76	74	79	76	74	78	76	73	72

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2308128
5°	2257711
10°	1957521
15°	1213265
20°	444712
25°	148671
30°	72979
35°	36379
40°	22542
45°	14304
50°	10209
55°	8344
60°	7105
65°	5604
70°	6924
75°	6863
80°	6819
85°	6793



TEST NUMBER: P431005

CATALOG NUMBER: LAMR4B112R309050DE010x1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	415.5	32.6
10°-20°	627.2	49.2
20°-30°	153.0	12.0
30°-40°	41.9	3.3
40°-50°	16.8	1.3
50°-60°	9.0	0.7
60°-70°	5.3	0.4
70°-80°	4.1	0.3
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1195.6	93.9
0°-40°	1237.5	97.1
0°-60°	1263.4	99.2
0°-90°	1273.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1273.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4678	
5°	4559	415
15°	2375	627
25°	273	153
35°	60	42
45°	20	17
55°	10	9
65°	5	5
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P431005

CATALOG NUMBER: LAMR4B112R309050DE010x1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4678.2
2.5°	4646.8
5°	4558.6
7.5°	4348.3
10°	3907.3
12.5°	3216.2
15°	2375.3
17.5°	1530.8
20°	847.0
22.5°	451.9
25°	273.1
27.5°	184.9
30°	128.1
32.5°	87.0
35°	60.4
37.5°	44.7
40°	35.0
42.5°	26.6
45°	20.5
47.5°	16.9
50°	13.3
52.5°	12.1
55°	9.7
57.5°	8.5
60°	7.2
62.5°	6.0
65°	4.8
67.5°	4.8
70°	4.8
72.5°	4.8
75°	3.6
77.5°	3.6
80°	2.4
82.5°	1.2
85°	1.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)