

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P429884

Luminaire Tested: **LAM4B112R359730DE010x1MMS**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P429884  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2008-908-6)  
Test Lab: INNOVATION CENTER (G2)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAM4B112R359730DE010x1MMS  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 35 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 97CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1123.7 lumens  
Efficiency: N/A  
Efficacy: 78.6 lumens/watt  
Spacing Criteria (0/90/45): 0.57 / 0.57 / 0.51  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P429884

CATALOG NUMBER: LAM4B112R359730DE010x1MMS

### Luminous Intensity Polar Plot

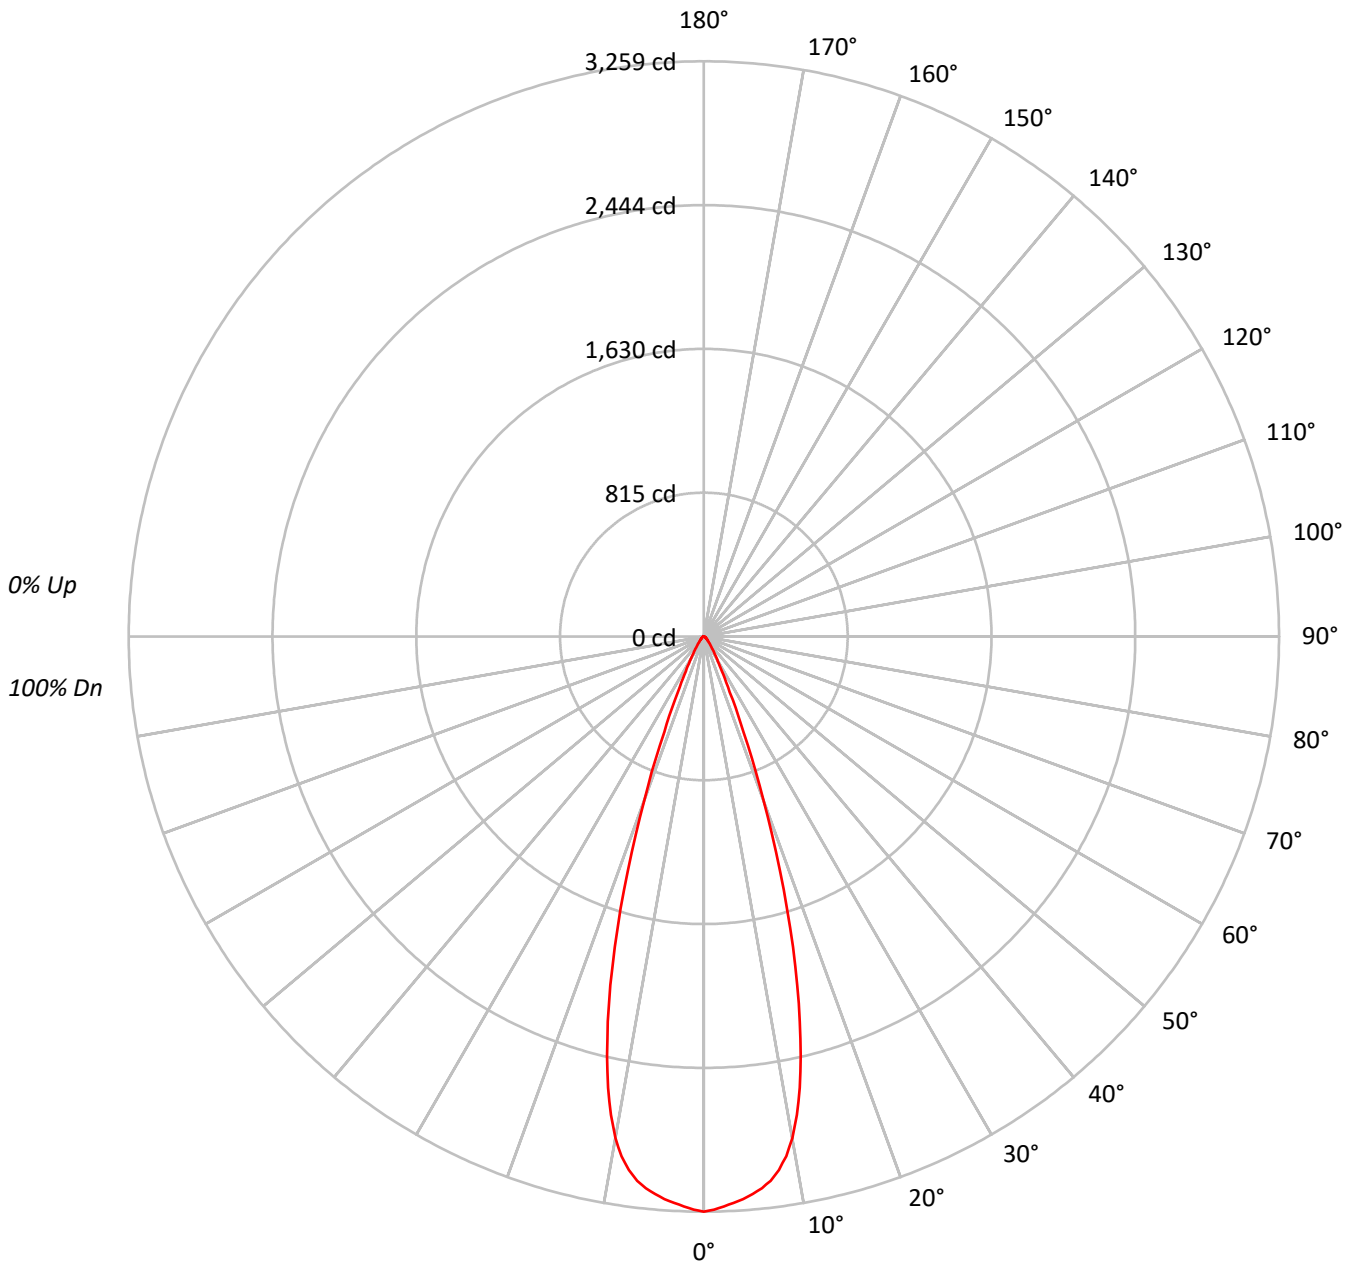



TEST NUMBER: P429884

CATALOG NUMBER: LAM4B112R359730DE010x1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96																			
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91																			
3	106	101	97	94	104	100	96	93	97	94	92	95	92	90	93	91	89	87																			
4	102	96	92	89	101	95	91	88	93	90	87	91	88	86	90	87	85	84																			
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	80	87	83	80	85	82	79	84	81	79	78																			
7	92	85	81	77	91	85	80	77	84	80	77	82	79	76	81	78	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1608023
5°	1570928
10°	1445659
15°	1044860
20°	516170
25°	189337
30°	85399
35°	46498
40°	28790
45°	19537
50°	14584
55°	12473
60°	11052
65°	10390
70°	9665
75°	8578
80°	9660
85°	6227



TEST NUMBER: P429884

CATALOG NUMBER: LAM4B112R359730DE010x1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	294.7	26.2
10°-20°	538.6	47.9
20°-30°	187.5	16.7
30°-40°	52.0	4.6
40°-50°	22.6	2.0
50°-60°	13.1	1.2
60°-70°	8.8	0.8
70°-80°	4.9	0.4
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1020.9	90.9
0°-40°	1072.9	95.5
0°-60°	1108.6	98.7
0°-90°	1123.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1123.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3259	
5°	3172	295
15°	2046	539
25°	348	188
35°	77	52
45°	28	23
55°	14	13
65°	9	9
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P429884

CATALOG NUMBER: LAM4B112R359730DE010x1MMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3259.2
1°	3248.0
2°	3231.2
3°	3214.4
4°	3195.4
5°	3171.9
6°	3142.8
7°	3107.1
8°	3052.3
9°	2981.8
10°	2885.6
11°	2762.6
12°	2613.8
13°	2439.3
14°	2248.1
15°	2045.6
16°	1829.8
17°	1612.8
18°	1394.7
19°	1184.4
20°	983.1
22.5°	586.1
25°	347.8
26°	289.7
27°	241.6
28°	204.7
29°	174.5
30°	149.9
32.5°	106.3
35°	77.2
37.5°	58.2
40°	44.7
42.5°	34.7
45°	28.0
47.5°	23.5
50°	19.0
52.5°	16.8
55°	14.5
57.5°	12.3
60°	11.2
62.5°	10.1
65°	8.9
67.5°	7.8



TEST NUMBER: P429884

CATALOG NUMBER: LAM4B112R359730DE010x1MMS

**CANDELA DISTRIBUTION (continued):**

	0°
75°	4.5
77.5°	3.4
80°	3.4
82.5°	2.2
85°	1.1
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







70°	6.7
72.5°	5.6



(END OF REPORT)