

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P431234

Luminaire Tested: **LAMR4B212R209027DE010x1MMS**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P431234  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-3)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAMR4B212R209027DE010x1MMS  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 20 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2199.6 lumens  
Efficiency: N/A  
Efficacy: 77.5 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.33  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 28.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P431234

CATALOG NUMBER: LAMR4B212R209027DE010x1MMS

### Luminous Intensity Polar Plot

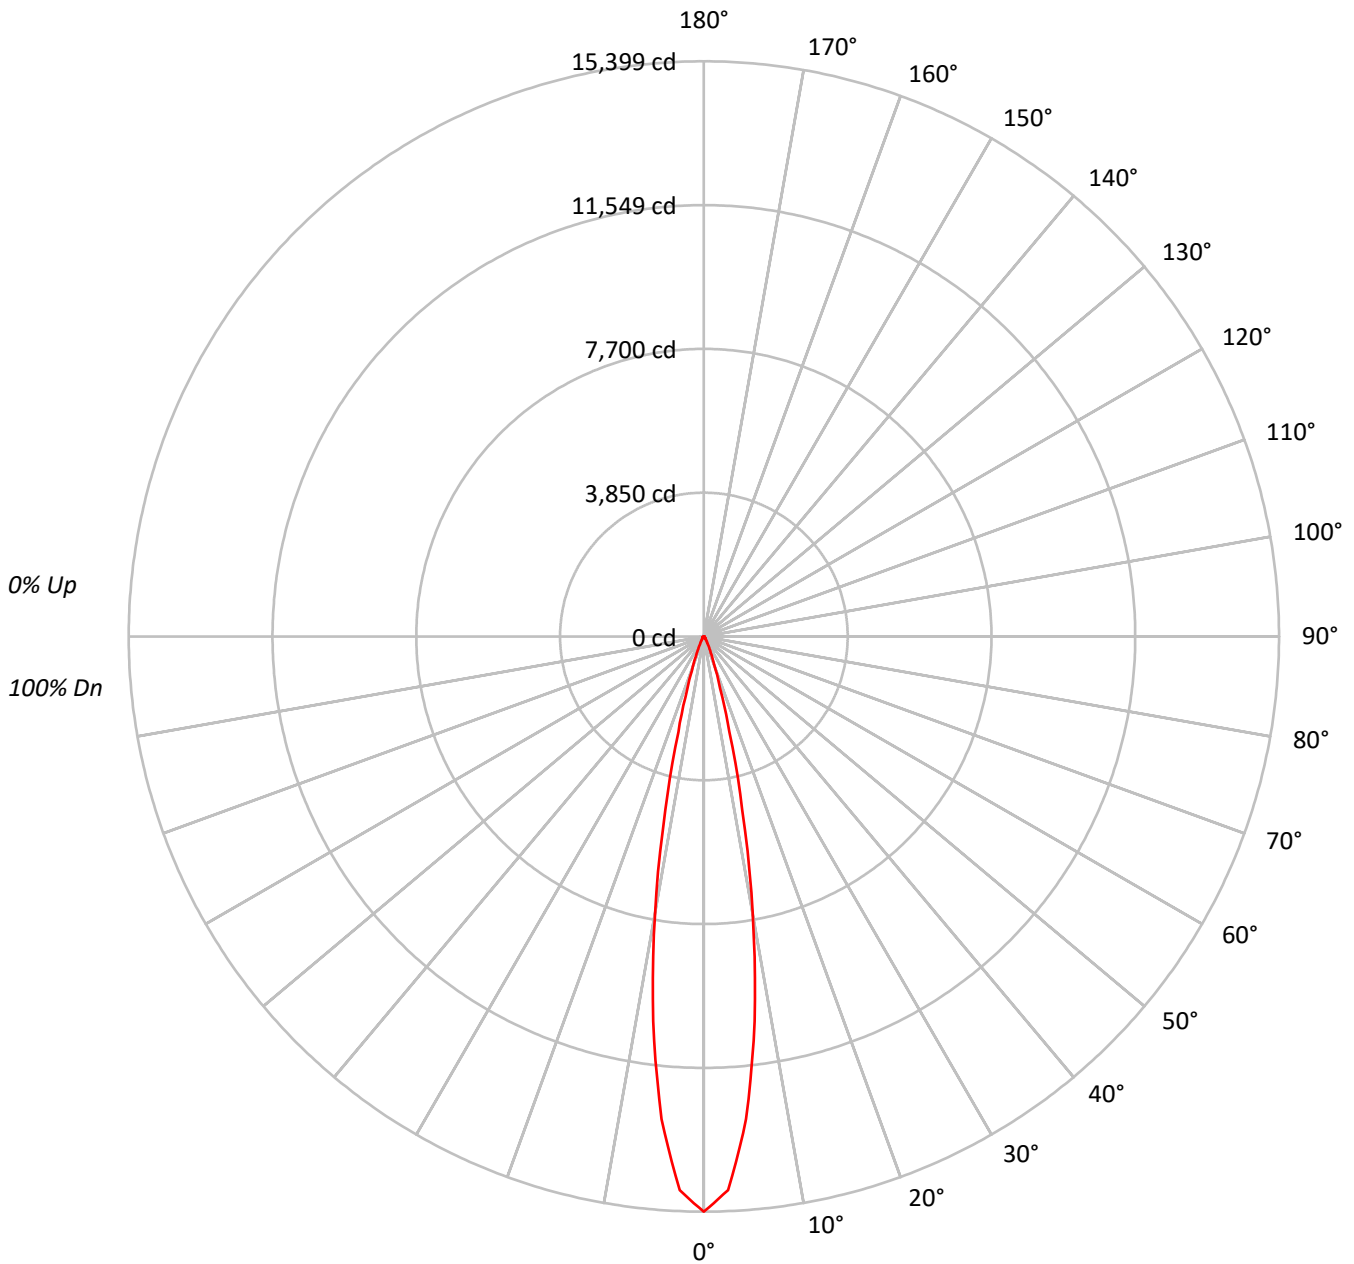



TEST NUMBER: P431234

CATALOG NUMBER: LAMR4B212R209027DE010x1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	110	113	111	109	108	107	106	105	103	102	101	100	99	99	97
2	112	108	105	103	110	106	104	102	103	101	100	101	99	97	98	97	95	94
3	108	104	100	98	107	103	100	97	100	98	95	98	96	94	96	94	93	91
4	105	100	97	94	104	99	96	93	97	94	92	95	93	91	94	92	90	89
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83
8	96	90	86	83	95	89	86	83	88	85	83	87	85	82	87	84	82	81
9	94	88	84	81	93	87	84	81	86	83	81	86	83	81	85	82	81	80
10	92	86	82	80	91	85	82	80	85	82	79	84	81	79	83	81	79	78

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	7597700
5°	6422041
10°	3772059
15°	1350615
20°	446865
25°	177850
30°	85057
35°	48606
40°	35101
45°	29584
50°	34080
55°	27784
60°	13913
65°	11791
70°	14570
75°	15441
80°	11365
85°	11322



TEST NUMBER: P431234

CATALOG NUMBER: LAMR4B212R209027DE010x1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1061.8	48.3
10°-20°	828.0	37.6
20°-30°	171.9	7.8
30°-40°	54.2	2.5
40°-50°	34.9	1.6
50°-60°	28.0	1.3
60°-70°	11.0	0.5
70°-80°	8.3	0.4
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2061.6	93.7
0°-40°	2115.8	96.2
0°-60°	2178.7	99.1
0°-90°	2199.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2199.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15399	
5°	12967	###
15°	2644	828
25°	327	172
35°	81	54
45°	42	35
55°	32	28
65°	10	11
75°	8	8
85°	2	2
90°	0	



TEST NUMBER: P431234

CATALOG NUMBER: LAMR4B212R209027DE010x1MMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	15399.3
2.5°	14834.6
5°	12966.9
7.5°	10389.2
10°	7529.2
12.5°	4749.9
15°	2644.2
17.5°	1454.2
20°	851.1
22.5°	520.4
25°	326.7
27.5°	215.8
30°	149.3
32.5°	104.9
35°	80.7
37.5°	64.5
40°	54.5
42.5°	46.4
45°	42.4
47.5°	42.4
50°	44.4
52.5°	42.4
55°	32.3
57.5°	22.2
60°	14.1
62.5°	12.1
65°	10.1
67.5°	10.1
70°	10.1
72.5°	10.1
75°	8.1
77.5°	6.1
80°	4.0
82.5°	2.0
85°	2.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)