

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P431426

Luminaire Tested: **LAMR4B212R609027DE010x1MMS**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P431426  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2009-969-1)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAMR4B212R609027DE010x1MMS  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 60 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2069.7 lumens  
Efficiency: N/A  
Efficacy: 72.9 lumens/watt  
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.89  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 28.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P431426

CATALOG NUMBER: LAMR4B212R609027DE010x1MMS

### Luminous Intensity Polar Plot

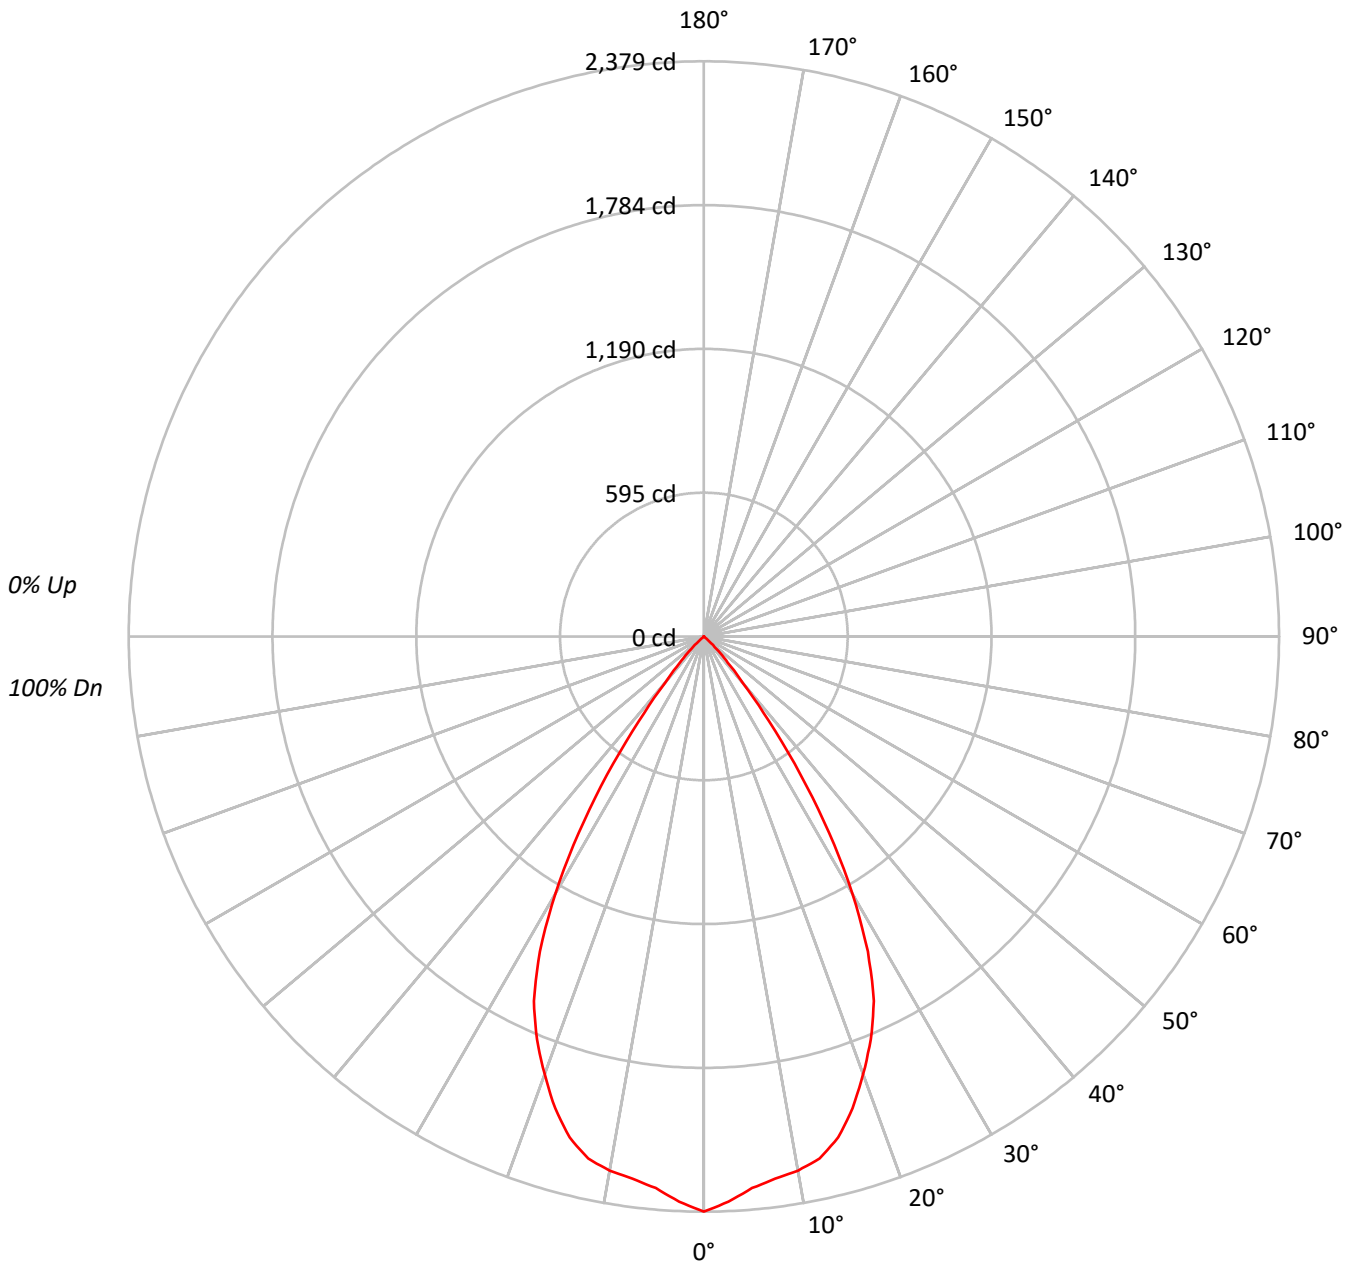



TEST NUMBER: P431426

CATALOG NUMBER: LAMR4B212R609027DE010x1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	96	91	88	93	89	86	91	87	85	88	86	84	82			
4	98	91	85	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77			
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	69	67			
7	84	75	70	66	83	75	69	65	74	69	65	72	68	65	71	67	64	63			
8	80	71	65	61	79	71	65	61	70	65	61	69	64	61	68	64	60	59			
9	77	67	62	58	76	67	61	58	66	61	57	65	60	57	64	60	57	56			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1173602
5°	1134254
10°	1123722
15°	1095836
20°	1011286
25°	905637
30°	700795
35°	419807
40°	161273
45°	58959
50°	2303
55°	1720
60°	1974
65°	1167
70°	1443
75°	1906
80°	2841
85°	0



TEST NUMBER: P431426

CATALOG NUMBER: LAMR4B212R609027DE010x1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	217.5	10.5
10°-20°	596.8	28.8
20°-30°	744.6	36.0
30°-40°	433.7	21.0
40°-50°	72.4	3.5
50°-60°	1.9	0.1
60°-70°	1.4	0.1
70°-80°	1.1	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1558.9	75.3
0°-40°	1992.6	96.3
0°-60°	2066.9	99.9
0°-90°	2069.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2069.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2379	
5°	2290	217
15°	2145	597
25°	1664	745
35°	697	434
45°	84	72
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P431426

CATALOG NUMBER: LAMR4B212R609027DE010x1MMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2378.7
2.5°	2339.5
5°	2290.2
7.5°	2262.1
10°	2243.0
12.5°	2211.8
15°	2145.4
17.5°	2045.8
20°	1926.1
22.5°	1804.4
25°	1663.6
27.5°	1468.5
30°	1230.1
32.5°	963.6
35°	697.0
37.5°	439.5
40°	250.4
42.5°	146.8
45°	84.5
47.5°	29.2
50°	3.0
52.5°	2.0
55°	2.0
57.5°	2.0
60°	2.0
62.5°	2.0
65°	1.0
67.5°	1.0
70°	1.0
72.5°	1.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)