

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P430135

Luminaire Tested: **LAM4B212R309035DE010x1MB**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P430135
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-8)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAM4B212R309035DE010x1MB
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 30 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2511.6 lumens
Efficiency: N/A
Efficacy: 88.4 lumens/watt
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.46
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct

Input Watts (W): 28.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P430135
CATALOG NUMBER: LAM4B212R309035DE010x1MB

Luminous Intensity Polar Plot

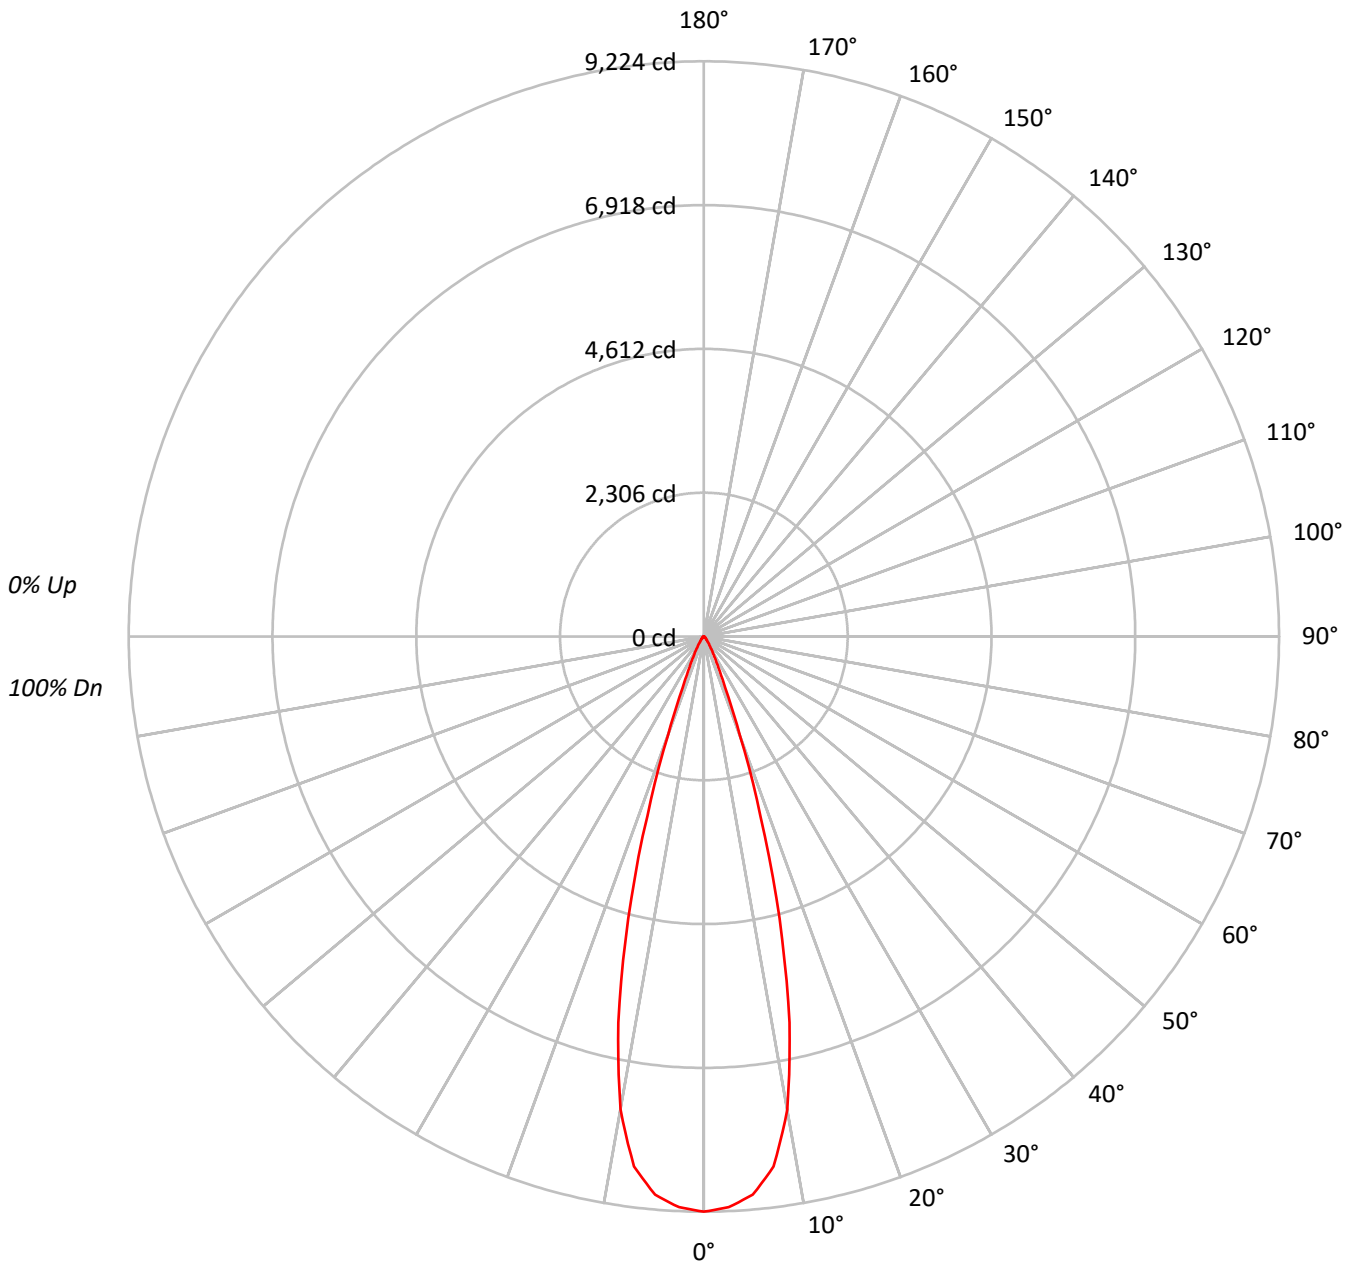



TEST NUMBER: P430135

CATALOG NUMBER: LAM4B212R309035DE010x1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	112	111	109	107	107	105	104	103	102	101	100	99	98	96		
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	95	94	93		
3	107	103	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	90		
4	104	98	94	91	102	97	94	91	95	92	90	93	91	89	92	90	88	87		
5	101	95	91	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84		
6	98	91	87	84	97	91	87	84	89	86	83	88	85	83	87	84	82	81		
7	95	88	84	81	94	88	84	81	87	83	81	86	83	80	85	82	80	79		
8	92	86	81	79	91	85	81	78	84	81	78	83	80	78	83	80	78	77		
9	90	83	79	76	89	83	79	76	82	78	76	81	78	76	80	78	75	74		
10	88	81	77	74	87	80	77	74	80	76	74	79	76	74	78	76	73	72		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4550686
5°	4451236
10°	3859482
15°	2392104
20°	876718
25°	293096
30°	143851
35°	71735
40°	44505
45°	28259
50°	20110
55°	16429
60°	14111
65°	11091
70°	13704
75°	13535
80°	13638
85°	13586



TEST NUMBER: P430135

CATALOG NUMBER: LAM4B212R309035DE010x1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	819.1	32.6
10°-20°	1236.7	49.2
20°-30°	301.5	12.0
30°-40°	82.6	3.3
40°-50°	33.2	1.3
50°-60°	17.8	0.7
60°-70°	10.6	0.4
70°-80°	8.1	0.3
80°-90°	2.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2357.3	93.9
0°-40°	2439.8	97.1
0°-60°	2490.9	99.2
0°-90°	2511.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2511.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9224	
5°	8988	819
15°	4683	1237
25°	538	302
35°	119	83
45°	40	33
55°	19	18
65°	10	11
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P430135

CATALOG NUMBER: LAM4B212R309035DE010x1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	9223.5
2.5°	9161.5
5°	8987.6
7.5°	8573.2
10°	7703.7
12.5°	6341.1
15°	4683.2
17.5°	3018.1
20°	1669.8
22.5°	890.9
25°	538.4
27.5°	364.5
30°	252.5
32.5°	171.5
35°	119.1
37.5°	88.1
40°	69.1
42.5°	52.4
45°	40.5
47.5°	33.3
50°	26.2
52.5°	23.8
55°	19.1
57.5°	16.7
60°	14.3
62.5°	11.9
65°	9.5
67.5°	9.5
70°	9.5
72.5°	9.5
75°	7.1
77.5°	7.1
80°	4.8
82.5°	2.4
85°	2.4
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)