

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P431245

Luminaire Tested: **LAMR4B212R209050DE010x1MB**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P431245  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-3)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAMR4B212R209050DE010x1MB  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 20 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2450.3 lumens  
Efficiency: N/A  
Efficacy: 86.3 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.33  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 28.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P431245

CATALOG NUMBER: LAMR4B212R209050DE010x1MB

### Luminous Intensity Polar Plot

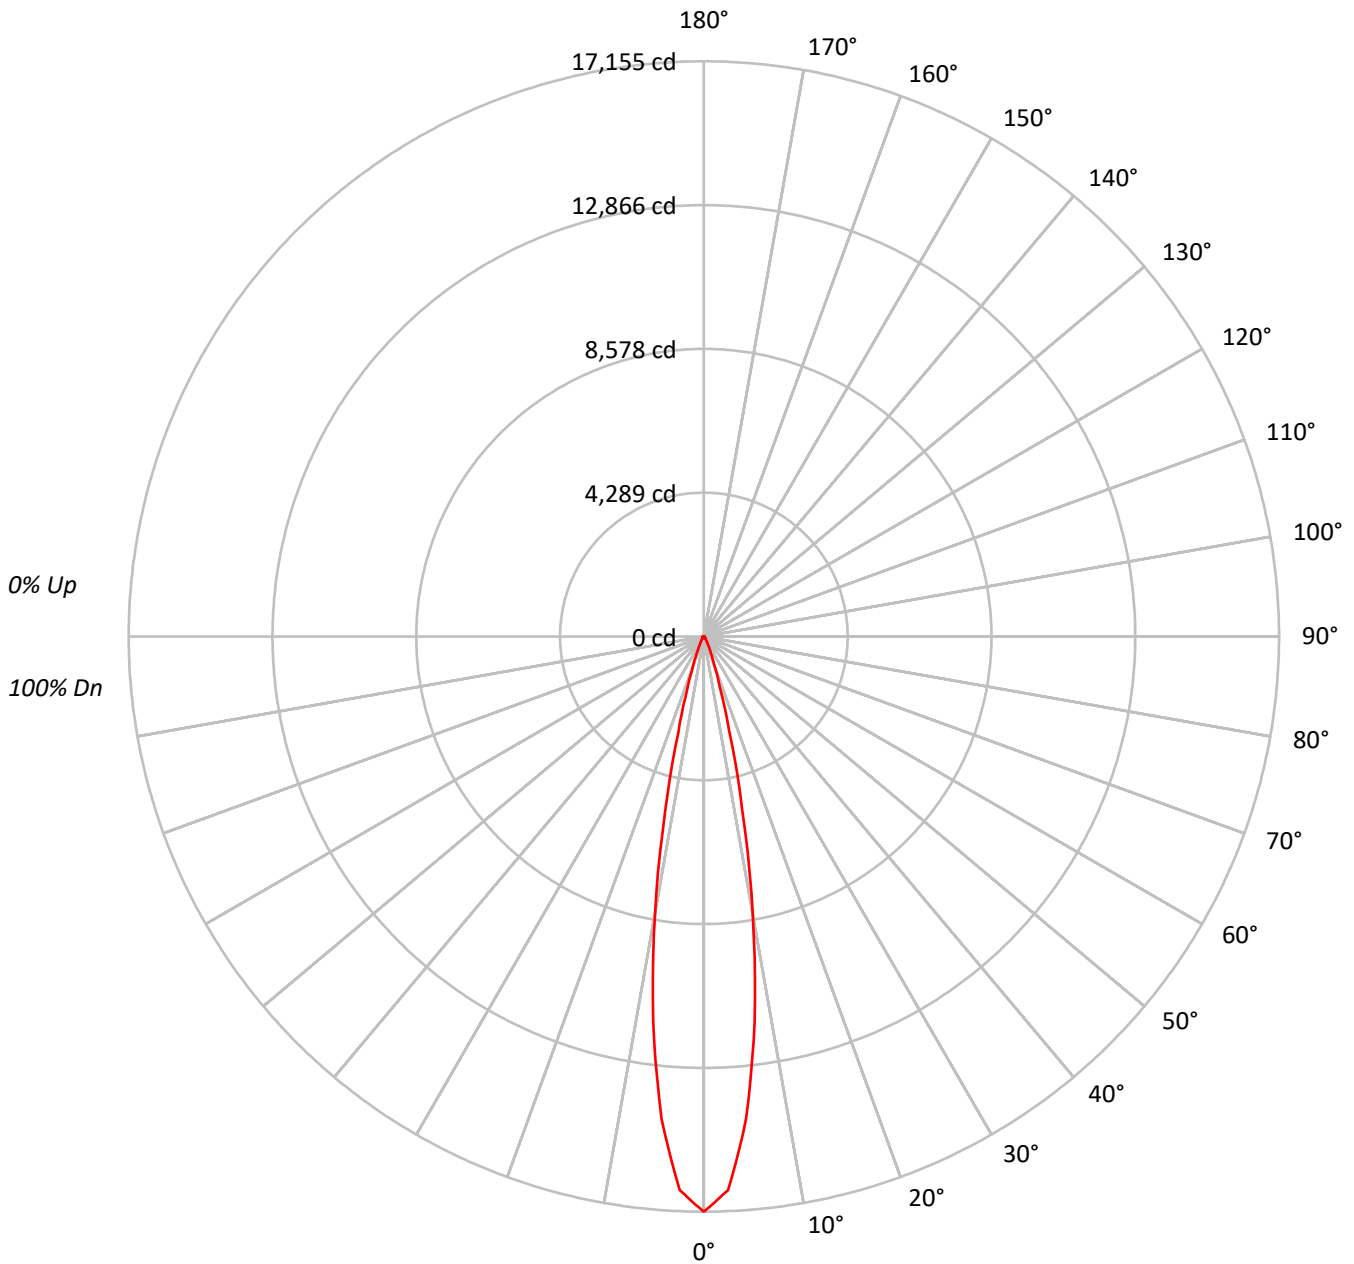



TEST NUMBER: P431245

CATALOG NUMBER: LAMR4B212R209050DE010x1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	110	113	111	109	108	107	106	105	103	102	102	100	99	99	97			97																
2	112	108	105	103	110	106	104	102	103	101	100	101	99	97	98	97	95	94			94																
3	108	104	100	98	107	103	100	97	100	98	96	98	96	94	96	94	93	91			91																
4	105	100	97	94	104	99	96	93	97	94	92	96	93	91	94	92	90	89			89																
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87			87																
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85			85																
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83			83																
8	96	90	86	83	95	89	86	83	88	85	83	87	85	82	87	84	82	81			81																
9	94	88	84	81	93	87	84	81	86	83	81	86	83	81	85	82	81	80			80																
10	92	86	82	80	91	85	82	80	85	82	79	84	81	79	83	81	79	78			78																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	8464025
5°	7154289
10°	4202160
15°	1504617
20°	497846
25°	198156
30°	94742
35°	54147
40°	39095
45°	32934
50°	37918
55°	30967
60°	15492
65°	13075
70°	16157
75°	17156
80°	12786
85°	12454



TEST NUMBER: P431245

CATALOG NUMBER: LAMR4B212R209050DE010x1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1182.8	48.3
10°-20°	922.4	37.6
20°-30°	191.5	7.8
30°-40°	60.4	2.5
40°-50°	38.8	1.6
50°-60°	31.2	1.3
60°-70°	12.2	0.5
70°-80°	9.2	0.4
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2296.7	93.7
0°-40°	2357.1	96.2
0°-60°	2427.1	99.1
0°-90°	2450.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2450.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	17155	
5°	14445	###
15°	2946	922
25°	364	191
35°	90	60
45°	47	39
55°	36	31
65°	11	12
75°	9	9
85°	2	2
90°	0	



TEST NUMBER: P431245

CATALOG NUMBER: LAMR4B212R209050DE010x1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	17155.2
2.5°	16526.1
5°	14445.4
7.5°	11573.9
10°	8387.7
12.5°	5291.5
15°	2945.7
17.5°	1620.0
20°	948.2
22.5°	579.7
25°	364.0
27.5°	240.4
30°	166.3
32.5°	116.8
35°	89.9
37.5°	71.9
40°	60.7
42.5°	51.7
45°	47.2
47.5°	47.2
50°	49.4
52.5°	47.2
55°	36.0
57.5°	24.7
60°	15.7
62.5°	13.5
65°	11.2
67.5°	11.2
70°	11.2
72.5°	11.2
75°	9.0
77.5°	6.7
80°	4.5
82.5°	2.2
85°	2.2
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)