

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P431296

Luminaire Tested: **LAMR4B212R309727DE010x1MB**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P431296
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-8)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAMR4B212R309727DE010x1MB
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 30 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 97CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2111.4 lumens
Efficiency: N/A
Efficacy: 74.3 lumens/watt
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.46
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 28.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P431296

CATALOG NUMBER: LAMR4B212R309727DE010x1MB

Luminous Intensity Polar Plot

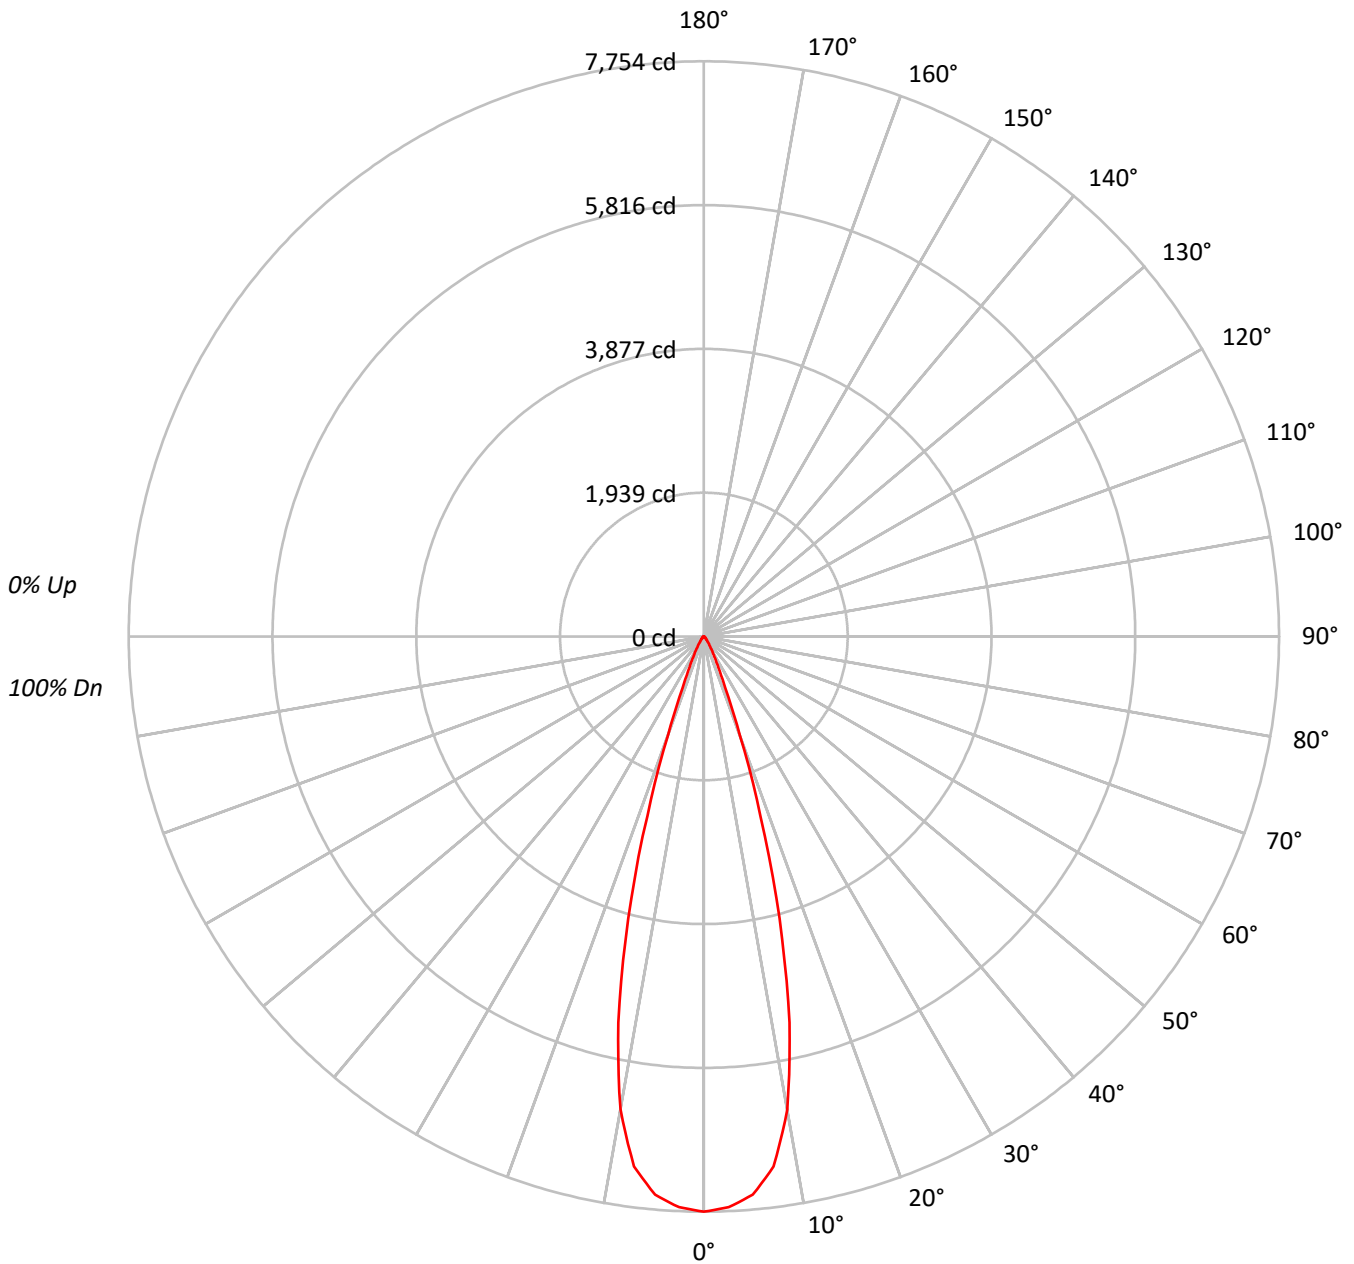



TEST NUMBER: P431296

CATALOG NUMBER: LAMR4B212R309727DE010x1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	112	111	109	107	107	105	104	103	102	101	100	99	98	96	96	96	96
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	95	94	93	93	93	93
3	107	103	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	90	90	90	90
4	104	98	94	91	102	97	94	91	95	92	90	93	91	89	92	90	88	87	87	87	87
5	101	95	91	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84	84	84	84
6	98	91	87	84	97	91	87	84	89	86	83	88	85	83	87	84	82	81	81	81	81
7	95	88	84	81	94	88	84	81	87	83	81	86	83	80	85	82	80	79	79	79	79
8	92	86	81	79	91	85	81	78	84	81	78	83	80	78	83	80	78	77	77	77	77
9	90	83	79	76	89	83	79	76	82	78	76	81	78	76	80	78	75	74	74	74	74
10	88	81	77	74	87	80	77	74	80	76	74	79	76	74	78	76	73	72	72	72	72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3825566
5°	3741969
10°	3244516
15°	2010957
20°	737056
25°	246388
30°	120949
35°	60291
40°	37420
45°	23723
50°	16886
55°	13763
60°	11841
65°	9339
70°	11540
75°	11438
80°	11365
85°	11322



TEST NUMBER: P431296

CATALOG NUMBER: LAMR4B212R309727DE010x1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	688.6	32.6
10°-20°	1039.6	49.2
20°-30°	253.5	12.0
30°-40°	69.4	3.3
40°-50°	27.9	1.3
50°-60°	14.9	0.7
60°-70°	8.9	0.4
70°-80°	6.9	0.3
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1981.7	93.9
0°-40°	2051.1	97.1
0°-60°	2094.0	99.2
0°-90°	2111.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2111.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7754	
5°	7556	689
15°	3937	1040
25°	453	253
35°	100	69
45°	34	28
55°	16	15
65°	8	9
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P431296

CATALOG NUMBER: LAMR4B212R309727DE010x1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	7753.8
2.5°	7701.7
5°	7555.5
7.5°	7207.1
10°	6476.2
12.5°	5330.7
15°	3937.0
17.5°	2537.2
20°	1403.8
22.5°	748.9
25°	452.6
27.5°	306.4
30°	212.3
32.5°	144.2
35°	100.1
37.5°	74.1
40°	58.1
42.5°	44.1
45°	34.0
47.5°	28.0
50°	22.0
52.5°	20.0
55°	16.0
57.5°	14.0
60°	12.0
62.5°	10.0
65°	8.0
67.5°	8.0
70°	8.0
72.5°	8.0
75°	6.0
77.5°	6.0
80°	4.0
82.5°	2.0
85°	2.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)