

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P430147

Luminaire Tested: **LAM4B212R309730DE010x1MB**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P430147  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-8)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAM4B212R309730DE010x1MB  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 30 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 97CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2223.7 lumens  
Efficiency: N/A  
Efficacy: 78.3 lumens/watt  
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.46  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 28.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P430147

CATALOG NUMBER: LAM4B212R309730DE010x1MB

### Luminous Intensity Polar Plot

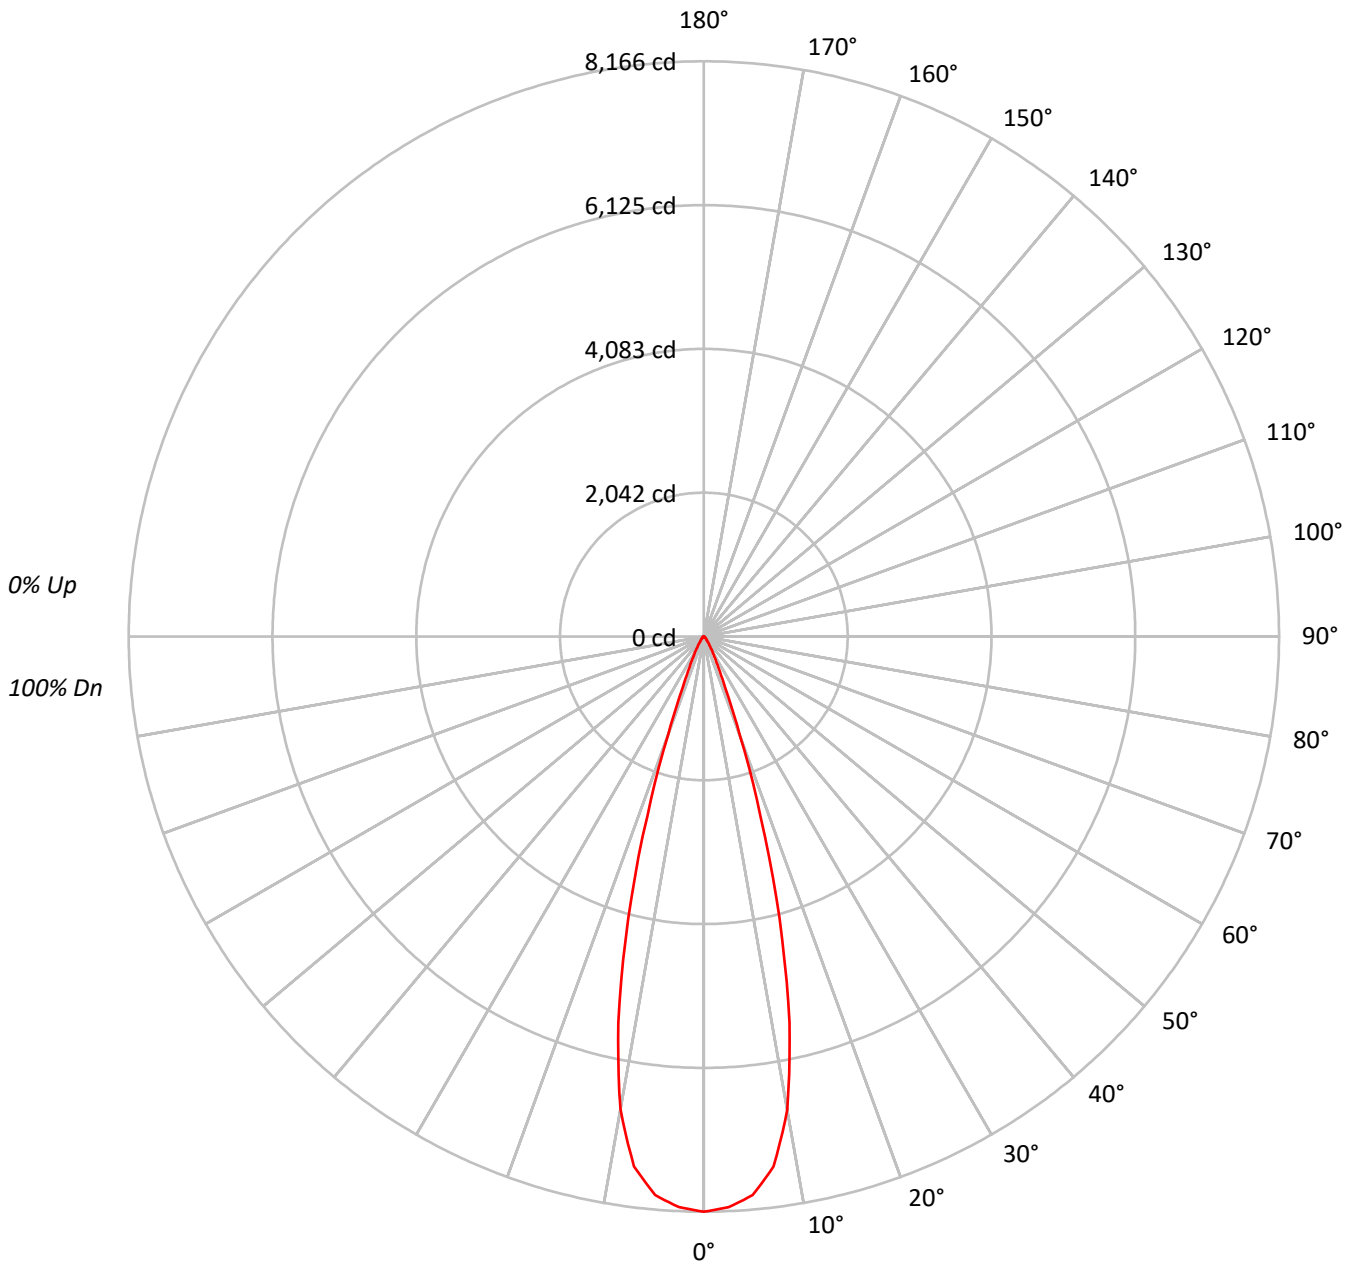



TEST NUMBER: P430147

CATALOG NUMBER: LAM4B212R309730DE010x1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	115	113	111	109	112	111	109	107	107	105	104	103	102	101	100	99	98	96	96																										
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	95	94	93	93																										
3	107	103	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	90	87																										
4	104	98	94	91	102	97	94	91	95	92	90	93	91	89	92	90	88	87	84																										
5	101	95	91	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84	81																										
6	98	91	87	84	97	91	87	84	89	86	83	88	85	83	87	84	82	81	79																										
7	95	88	84	81	94	88	84	81	87	83	81	86	83	80	85	82	80	79	77																										
8	92	86	81	79	91	85	81	78	84	81	78	83	80	78	83	80	78	77	74																										
9	90	83	79	76	89	83	79	76	82	78	76	81	78	76	80	78	75	74	72																										
10	88	81	77	74	87	80	77	74	80	76	74	79	76	74	78	76	73	72	70																										

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	4029184
5°	3941164
10°	3417158
15°	2117966
20°	776277
25°	259508
30°	127386
35°	63543
40°	39417
45°	25049
50°	17807
55°	14537
60°	12532
65°	9806
70°	12117
75°	12010
80°	11933
85°	11888



TEST NUMBER: P430147

CATALOG NUMBER: LAM4B212R309730DE010x1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	725.2	32.6
10°-20°	1094.9	49.2
20°-30°	267.0	12.0
30°-40°	73.1	3.3
40°-50°	29.4	1.3
50°-60°	15.8	0.7
60°-70°	9.4	0.4
70°-80°	7.2	0.3
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2087.1	93.9
0°-40°	2160.3	97.1
0°-60°	2205.5	99.2
0°-90°	2223.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2223.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8166	
5°	7958	725
15°	4146	1095
25°	477	267
35°	106	73
45°	36	29
55°	17	16
65°	8	9
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P430147

CATALOG NUMBER: LAM4B212R309730DE010x1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	8166.5
2.5°	8111.6
5°	7957.7
7.5°	7590.7
10°	6820.8
12.5°	5614.4
15°	4146.5
17.5°	2672.2
20°	1478.5
22.5°	788.8
25°	476.7
27.5°	322.7
30°	223.6
32.5°	151.9
35°	105.5
37.5°	78.0
40°	61.2
42.5°	46.4
45°	35.9
47.5°	29.5
50°	23.2
52.5°	21.1
55°	16.9
57.5°	14.8
60°	12.7
62.5°	10.5
65°	8.4
67.5°	8.4
70°	8.4
72.5°	8.4
75°	6.3
77.5°	6.3
80°	4.2
82.5°	2.1
85°	2.1
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)