

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P430831

Luminaire Tested: **LAM4B412R559035DE01021MB**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P430831
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-898-142)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAM4B412R559035DE01021MB
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 55 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5975.7 lumens
Efficiency: N/A
Efficacy: 110.5 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.81
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 54.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P430831

CATALOG NUMBER: LAM4B412R559035DE01021MB

Luminous Intensity Polar Plot

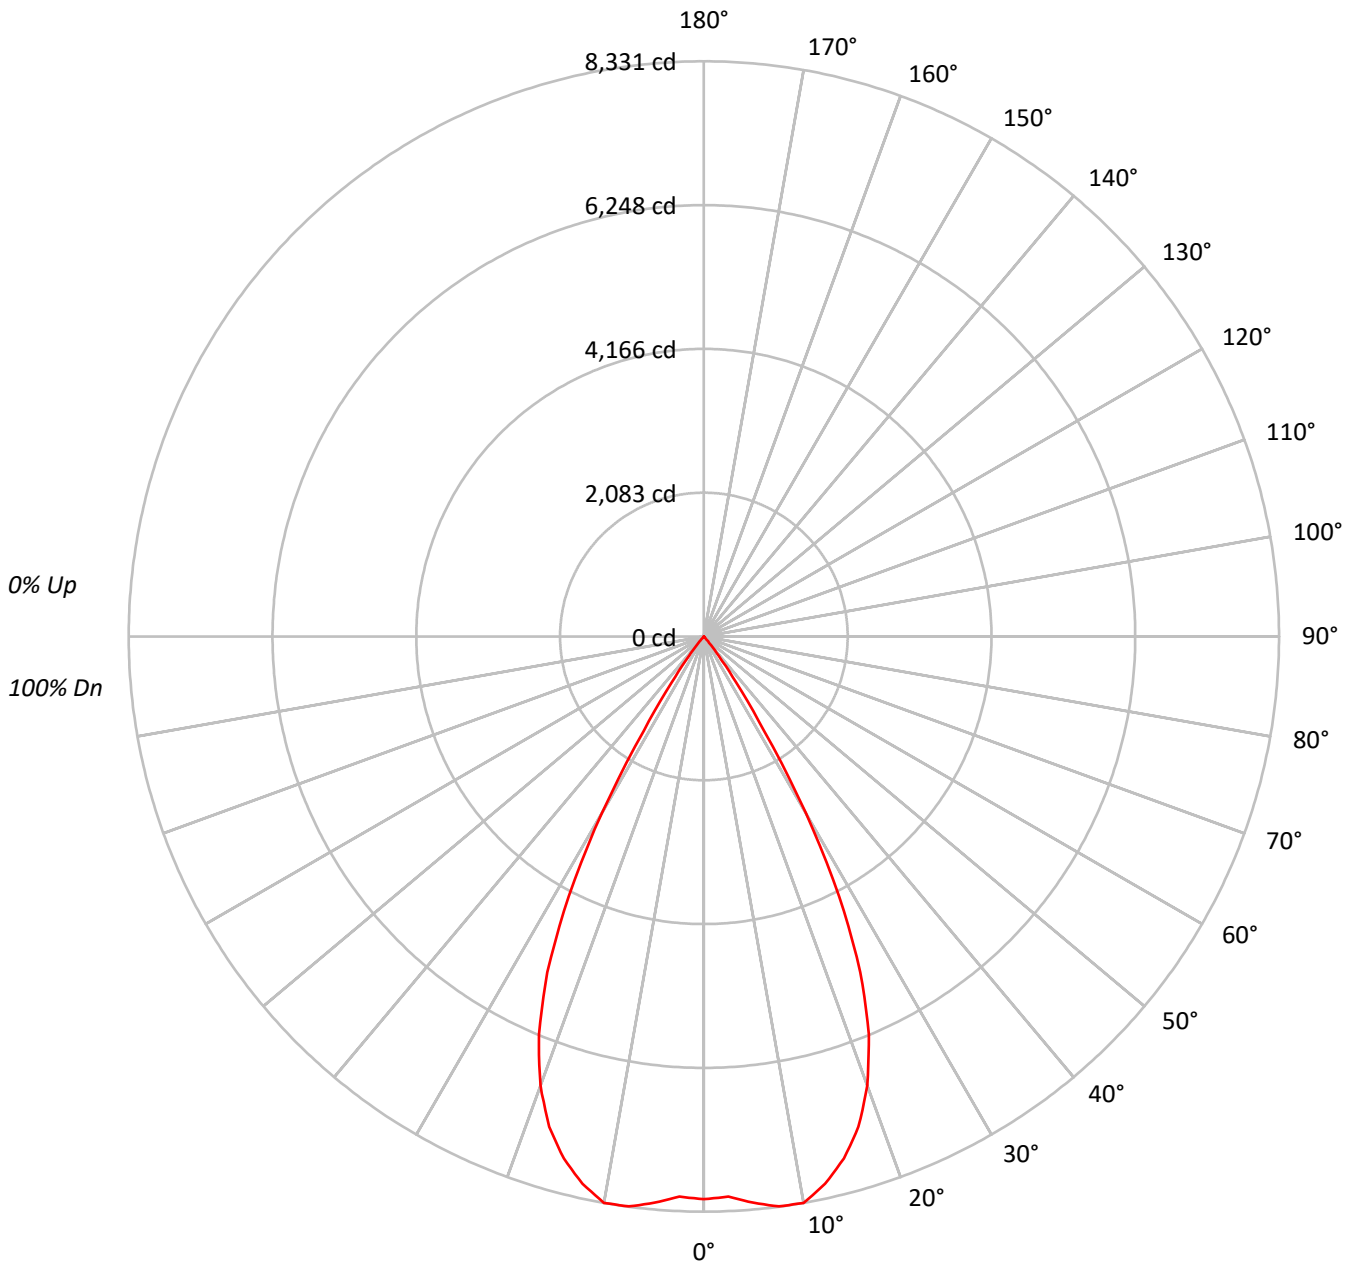



TEST NUMBER: P430831

CATALOG NUMBER: LAM4B412R559035DE01021MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	114	112	109	107	112	110	108	106	105	104	102	102	101	99	98	97	97	95	95	97	94	93	91	90	90	91	91	95																		
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90	90	91	88	86	85	85	86	86	86	85																		
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	86	83	82	81	80	80	81	81	80																		
4	100	94	89	85	99	92	88	85	90	87	84	88	85	83	87	84	82	80	80	81	78	77	76	75	75	76	76	76																		
5	96	89	83	80	94	88	83	79	86	82	79	84	81	78	83	80	77	76	75	76	73	72	71	70	70	71	71	76																		
6	92	84	79	75	91	83	78	75	82	78	74	81	77	74	79	76	73	72	71	72	69	68	67	66	66	67	67	72																		
7	88	80	75	71	87	79	74	71	78	74	70	77	73	70	76	72	70	69	68	69	66	65	64	63	63	64	64	68																		
8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	72	69	66	65	64	65	62	61	60	60	61	61	61	65																		
9	81	72	67	64	80	72	67	63	71	66	63	70	66	63	69	66	63	62	61	62	59	58	57	56	56	57	57	61																		
10	78	69	64	60	77	69	64	60	68	63	60	67	63	60	66	63	60	59	58	59	56	55	54	53	53	54	54	59																		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	4021833
5°	4078104
10°	4173553
15°	3999082
20°	3633406
25°	2919913
30°	1680859
35°	487807
40°	74518
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P430831

CATALOG NUMBER: LAM4B412R559035DE01021MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	789.6	13.2
10°-20°	2178.3	36.5
20°-30°	2351.2	39.3
30°-40°	643.1	10.8
40°-50°	13.5	0.2
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5319.1	89.0
0°-40°	5962.2	99.8
0°-60°	5975.7	100.0
0°-90°	5975.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5975.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8152	
5°	8234	790
15°	7829	2178
25°	5364	2351
35°	810	643
45°	0	14
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P430831

CATALOG NUMBER: LAM4B412R559035DE01021MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	8151.6
2.5°	8118.5
5°	8234.2
7.5°	8325.1
10°	8330.6
12.5°	8118.5
15°	7829.3
17.5°	7446.3
20°	6920.2
22.5°	6242.5
25°	5363.7
27.5°	4242.5
30°	2950.4
32.5°	1617.1
35°	809.9
37.5°	347.1
40°	115.7
42.5°	16.5
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)