

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P431919

Luminaire Tested: **LAMR4B412R409050DE01021MW**

Issue Date: 11/23/2020

Test Information

Test Method: LM-41-14
Report Number: P431919
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1911-585-7)
Test Lab: INNOVATION CENTER (G1)
Issue Date: 11/23/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LAMR4B412R409050DE01021MW
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 40 DEG TIR OPTIC
Light Source: HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6298.1 lumens
Efficiency: N/A
Efficacy: 116.4 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.29' x H: 0')
CIE Type: Direct


Input Watts (W): 54.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P431919

CATALOG NUMBER: LAMR4B412R409050DE01021MW

Luminous Intensity Polar Plot

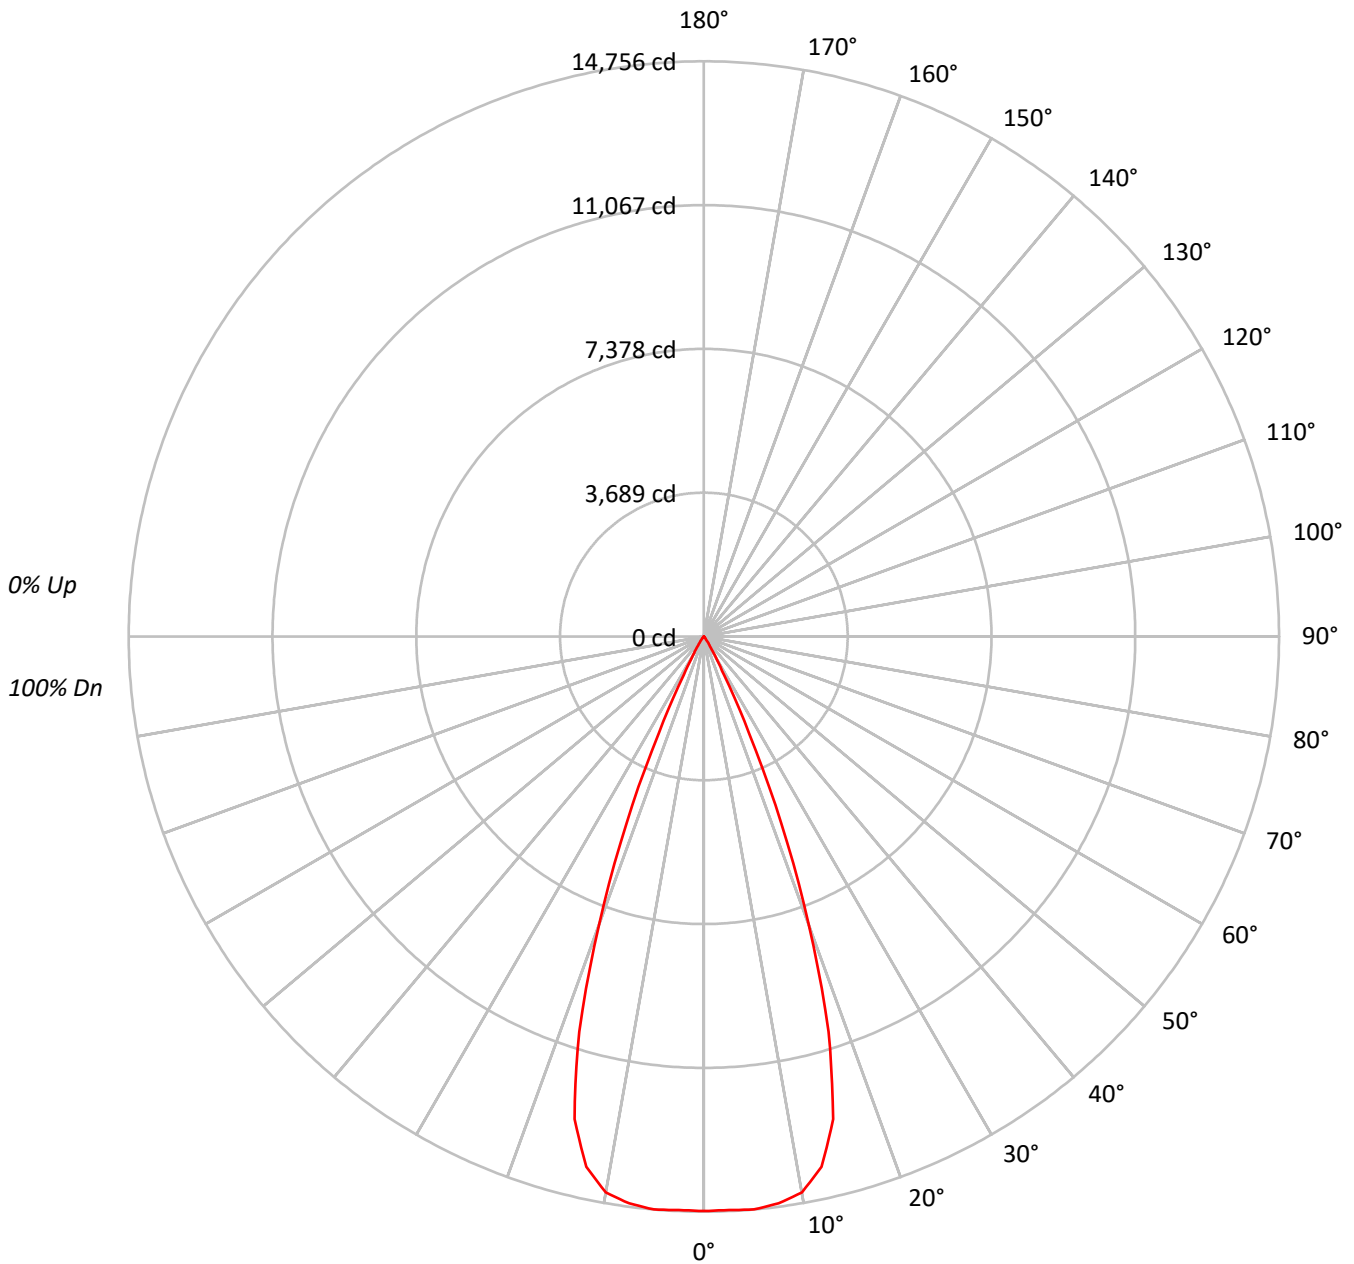



TEST NUMBER: P431919

CATALOG NUMBER: LAMR4B412R409050DE01021MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96	96	96	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92	92	92	92
3	107	102	98	95	105	101	97	94	98	95	93	96	94	92	94	92	90	89	89	89	89
4	103	98	93	90	102	97	93	90	95	91	89	93	90	88	91	89	87	86	86	86	86
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	84	82	82	82	82
6	97	90	85	82	95	89	85	82	88	84	82	87	83	81	85	83	80	79	79	79	79
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77	77	77	77
8	91	83	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	74	74	74	74
9	88	81	76	73	87	80	76	73	79	75	73	79	75	73	78	75	72	71	71	71	71
10	85	78	73	71	84	77	73	70	77	73	70	76	73	70	75	72	70	69	69	69	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2374316
5°	2386409
10°	2369473
15°	2137641
20°	1348674
25°	485725
30°	101757
35°	30956
40°	6183
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P431919

CATALOG NUMBER: LAMR4B412R409050DE01021MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1399.3	22.2
10°-20°	3346.0	53.1
20°-30°	1426.7	22.7
30°-40°	122.4	1.9
40°-50°	3.6	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6172.1	98.0
0°-40°	6294.4	99.9
0°-60°	6298.1	100.0
0°-90°	6298.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6298.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14738	
5°	14756	###
15°	12817	3346
25°	2732	1427
35°	157	122
45°	0	4
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P431919

CATALOG NUMBER: LAMR4B412R409050DE01021MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	14737.8
2.5°	14724.5
5°	14756.5
7.5°	14668.5
10°	14484.3
12.5°	13934.6
15°	12816.6
17.5°	10633.8
20°	7866.6
22.5°	5179.5
25°	2732.5
27.5°	1107.4
30°	547.0
32.5°	290.9
35°	157.4
37.5°	80.1
40°	29.4
42.5°	5.3
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)