

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P431825

Luminaire Tested: **LAMR4B412R209727DE01021MMS**

Issue Date: 11/23/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P431825  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2007-857-3)  
Test Lab: INNOVATION CENTER (G1)  
Issue Date: 11/23/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LAMR4B412R209727DE01021MMS  
Description: PORTFOLIO 4INCH ADJUSTABLE MULTIPLE, 20 DEG TIR OPTIC  
Light Source: HIGH LUMEN LED 97CRI / 2700K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5027.1 lumens  
Efficiency: N/A  
Efficacy: 92.9 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.33  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 54.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P431825

CATALOG NUMBER: LAMR4B412R209727DE01021MMS

### Luminous Intensity Polar Plot

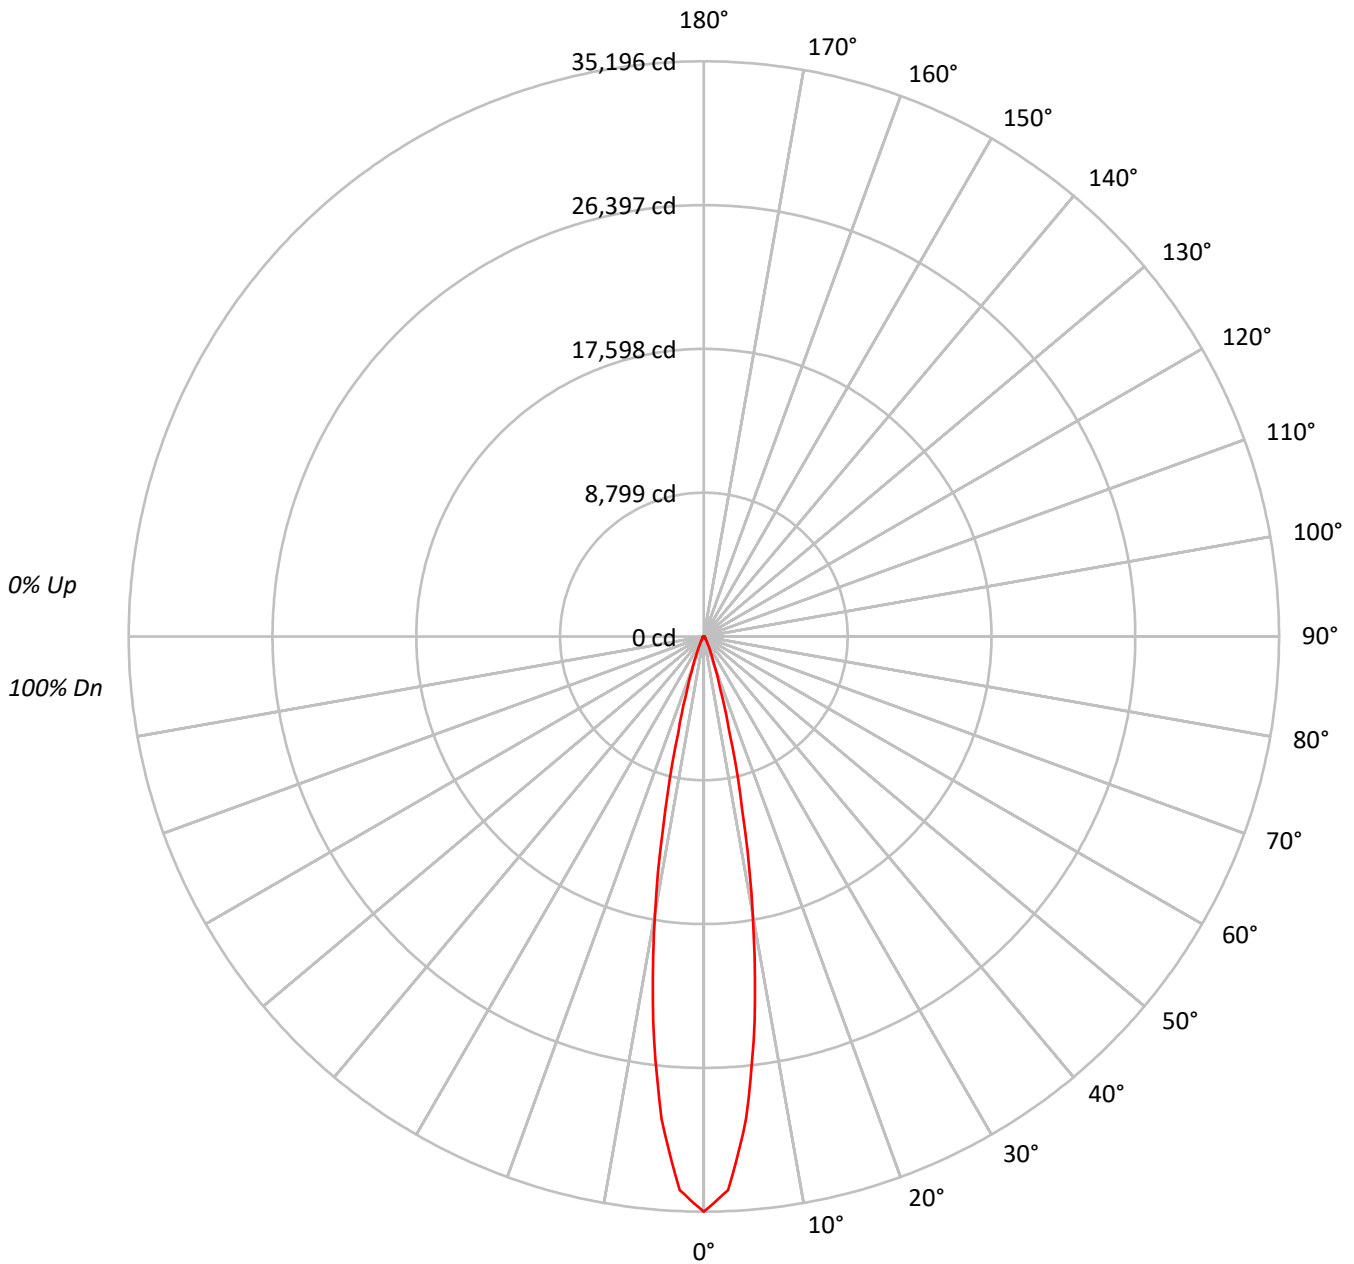



TEST NUMBER: P431825

CATALOG NUMBER: LAMR4B412R209727DE01021MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	109	108	107	106	105	103	102	102	100	99	99	97	97	97	97
2	112	108	105	103	110	106	104	102	103	101	100	101	99	97	98	97	95	94	94	94	94
3	108	104	100	98	107	103	100	97	100	98	96	98	96	94	96	94	93	91	91	91	91
4	105	100	97	94	104	99	96	93	97	94	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83	83	83	83
8	96	90	86	83	95	89	86	83	88	85	83	87	85	82	87	84	82	81	81	81	81
9	94	88	84	81	93	87	84	81	86	83	81	86	83	81	85	82	81	80	80	80	80
10	92	86	82	80	91	85	82	80	85	82	79	84	81	79	83	81	79	78	78	78	78

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	17365085
5°	14677996
10°	8621349
15°	3086924
20°	1021420
25°	406546
30°	194327
35°	111065
40°	80186
45°	67542
50°	77831
55°	63481
60°	31872
65°	26851
70°	33179
75°	35075
80°	26140
85°	26040



TEST NUMBER: P431825

CATALOG NUMBER: LAMR4B412R209727DE01021MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2426.8	48.3
10°-20°	1892.5	37.6
20°-30°	392.8	7.8
30°-40°	123.8	2.5
40°-50°	79.6	1.6
50°-60°	64.0	1.3
60°-70°	25.1	0.5
70°-80°	18.8	0.4
80°-90°	3.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4712.0	93.7
0°-40°	4835.8	96.2
0°-60°	4979.5	99.1
0°-90°	5027.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5027.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	35196	
5°	29637	###
15°	6044	1892
25°	747	393
35°	184	124
45°	97	80
55°	74	64
65°	23	25
75°	18	19
85°	5	4
90°	0	



TEST NUMBER: P431825

CATALOG NUMBER: LAMR4B412R209727DE01021MMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	35196.2
2.5°	33905.4
5°	29636.7
7.5°	23745.3
10°	17208.6
12.5°	10856.2
15°	6043.5
17.5°	3323.7
20°	1945.4
22.5°	1189.3
25°	746.8
27.5°	493.3
30°	341.1
32.5°	239.7
35°	184.4
37.5°	147.5
40°	124.5
42.5°	106.0
45°	96.8
47.5°	96.8
50°	101.4
52.5°	96.8
55°	73.8
57.5°	50.7
60°	32.3
62.5°	27.7
65°	23.0
67.5°	23.0
70°	23.0
72.5°	23.0
75°	18.4
77.5°	13.8
80°	9.2
82.5°	4.6
85°	4.6
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)