

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843346

Luminaire Tested: **LD4C10DE010B2750 EU4C10B50 4LBNH**

Issue Date: 2/17/2023



Test Information

Test Method: LM-79-08
Report Number: P843346
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C10DE010B2750 EU4C10B50 4LBNH
Description: 4in Downlight with BioUp LEDs
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 776.3 lumens
Efficiency: N/A
Efficacy: 58.4 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843346

CATALOG NUMBER: LD4C10DE010B2750 EU4C10B50 4LBNH

Luminous Intensity Polar Plot

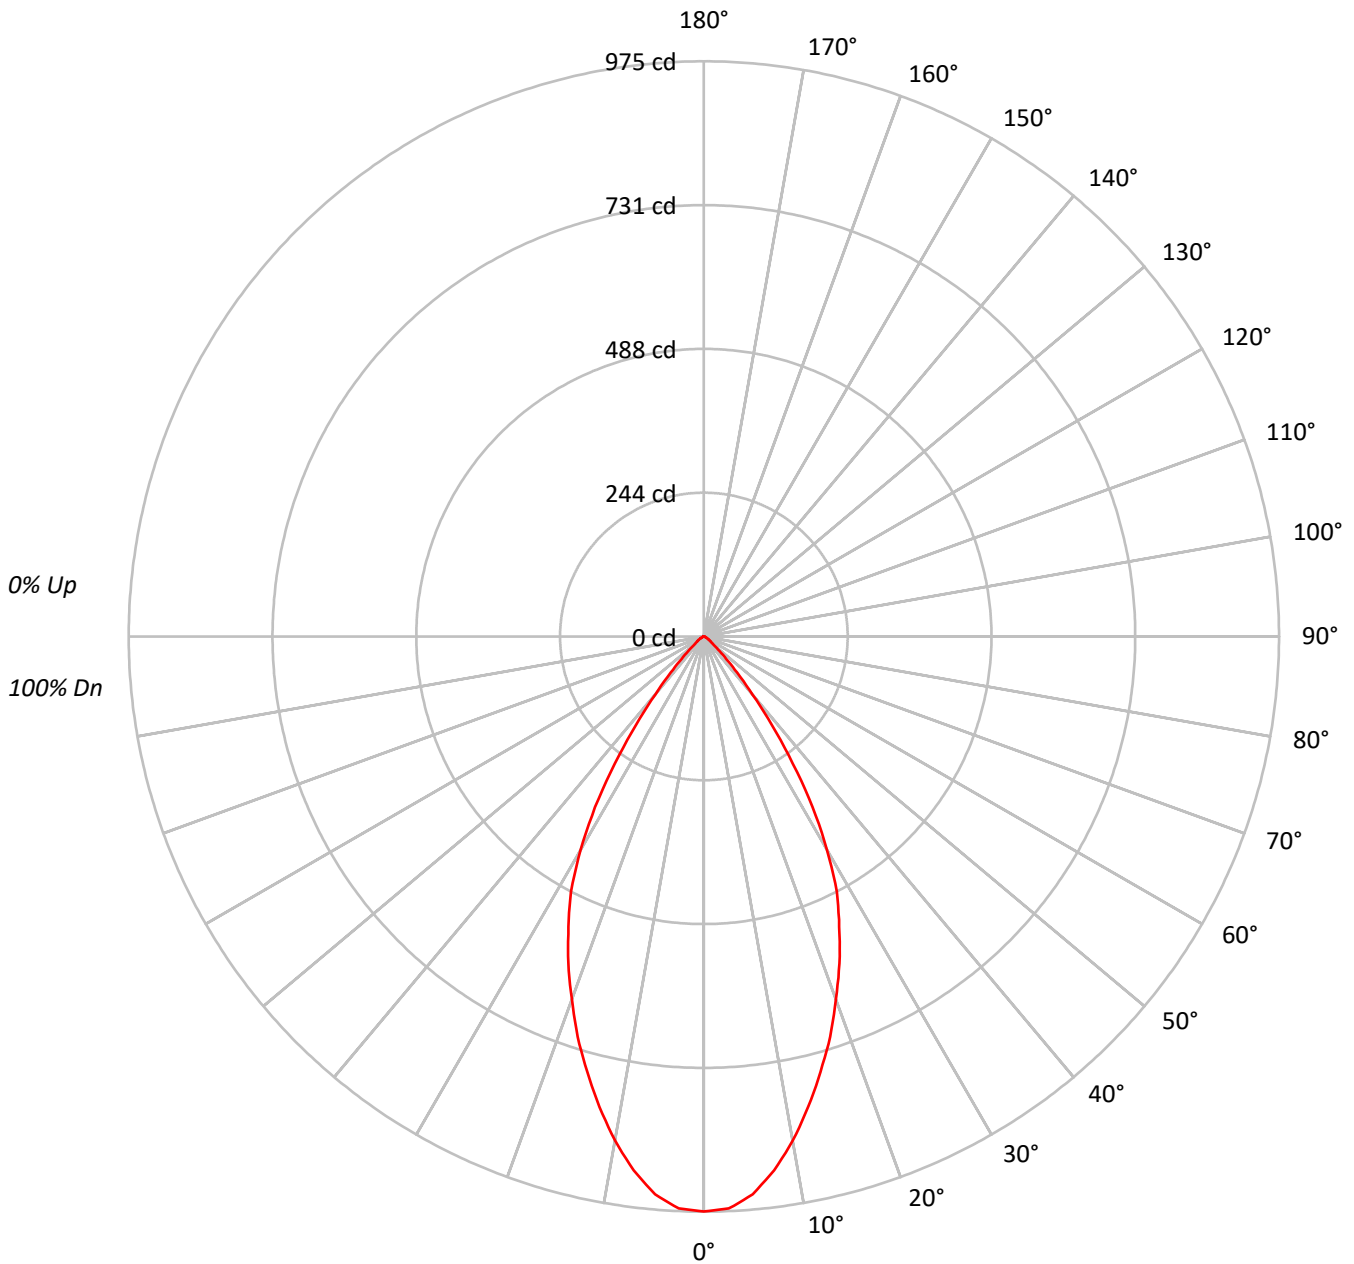



TEST NUMBER: P843346

CATALOG NUMBER: LD4C10DE010B2750 EU4C10B50 4LBNH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	119745
5°	117070
10°	108257
15°	97133
20°	85503
25°	73592
30°	59269
35°	39444
40°	20528
45°	9295
50°	4014
55°	2699
60°	1745
65°	1221
70°	1042
75°	665
80°	0
85°	0



TEST NUMBER: P843346

CATALOG NUMBER: LD4C10DE010B2750 EU4C10B50 4LBNH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.9	11.3
10°-20°	213.3	27.5
20°-30°	247.7	31.9
30°-40°	164.0	21.1
40°-50°	46.0	5.9
50°-60°	11.5	1.5
60°-70°	4.4	0.6
70°-80°	1.5	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	548.9	70.7
0°-40°	712.9	91.8
0°-60°	770.5	99.2
0°-90°	776.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	776.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	975	
5°	949	88
15°	764	213
25°	543	248
35°	263	164
45°	54	46
55°	13	12
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P843346

CATALOG NUMBER: LD4C10DE010B2750 EU4C10B50 4LBNH

CANDELA DISTRIBUTION (FULL):

	0°
0°	974.7
2.5°	970.5
5°	949.3
7.5°	912.7
10°	867.8
12.5°	817.1
15°	763.7
17.5°	711.7
20°	654.0
22.5°	600.5
25°	542.9
27.5°	488.1
30°	417.8
32.5°	343.2
35°	263.0
37.5°	188.5
40°	128.0
42.5°	82.9
45°	53.5
47.5°	32.4
50°	21.0
52.5°	15.4
55°	12.6
57.5°	9.8
60°	7.1
62.5°	5.6
65°	4.2
67.5°	2.9
70°	2.9
72.5°	1.4
75°	1.4
77.5°	1.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)