

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843372

Luminaire Tested: **LD4C15DE010B2750 EU4C15B30 4LBMH**

Issue Date: 2/17/2023



Test Information

Test Method: LM-79-08
Report Number: P843372
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C15DE010B2750 EU4C15B30 4LBMH
Description: 4in Downlight with BioUp LEDs
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1112.7 lumens
Efficiency: N/A
Efficacy: 65.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 17
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843372

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B30 4LBMH

Luminous Intensity Polar Plot

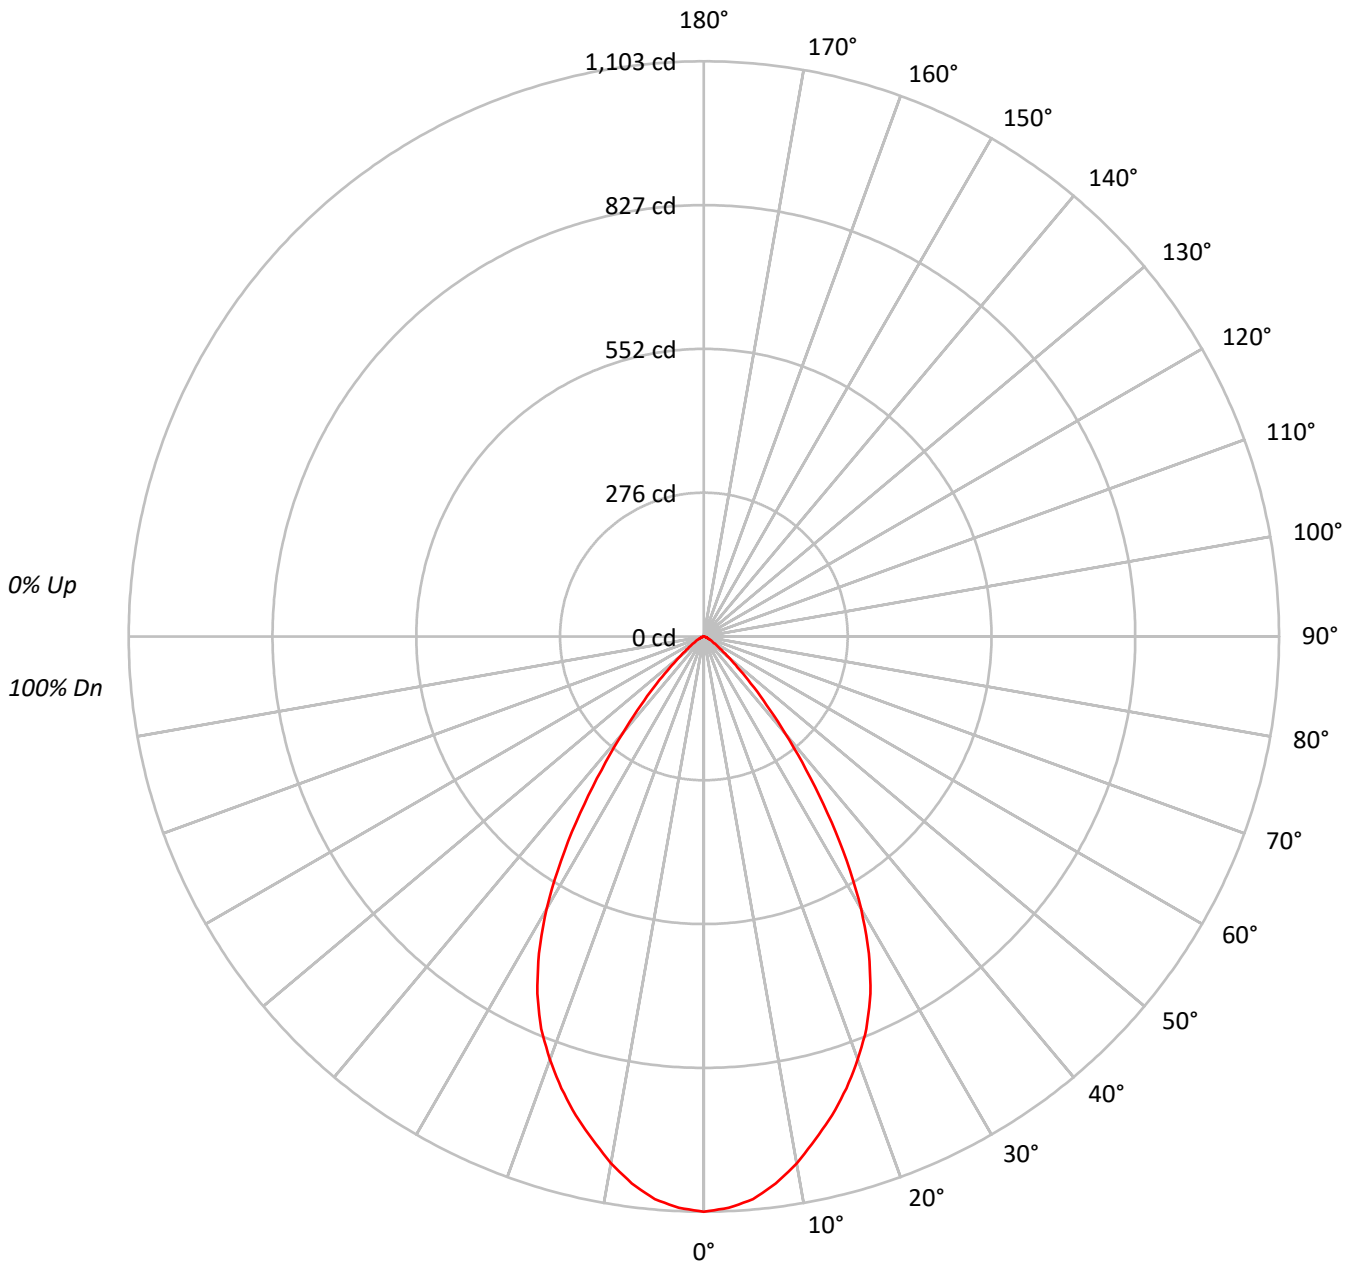



TEST NUMBER: P843372

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B30 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79				79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73				73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67				67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62				62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58				58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54				54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50				50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47				47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	135532
5°	133571
10°	127992
15°	120892
20°	112840
25°	102438
30°	85527
35°	61955
40°	38794
45°	22169
50°	11563
55°	6468
60°	4128
65°	2442
70°	1832
75°	807
80°	1203
85°	0



TEST NUMBER: P843372

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B30 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.5	9.1
10°-20°	266.3	23.9
20°-30°	342.3	30.8
30°-40°	257.5	23.1
40°-50°	103.4	9.3
50°-60°	29.4	2.6
60°-70°	9.3	0.8
70°-80°	2.7	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	710.1	63.8
0°-40°	967.6	87.0
0°-60°	1100.5	98.9
0°-90°	1112.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1112.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1103	
5°	1083	102
15°	950	266
25°	756	342
35°	413	258
45°	128	103
55°	30	29
65°	8	9
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P843372

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B30 4LBMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1103.2
2.5°	1096.6
5°	1083.1
7.5°	1057.8
10°	1026.0
12.5°	987.4
15°	950.5
17.5°	908.4
20°	863.1
22.5°	814.5
25°	755.7
27.5°	685.1
30°	602.9
32.5°	510.4
35°	413.1
37.5°	322.4
40°	241.9
42.5°	178.0
45°	127.6
47.5°	87.4
50°	60.5
52.5°	42.0
55°	30.2
57.5°	21.8
60°	16.8
62.5°	11.7
65°	8.4
67.5°	6.8
70°	5.1
72.5°	3.4
75°	1.7
77.5°	1.7
80°	1.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)