

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843389

Luminaire Tested: **LD4C15DE010B2750 EU4C15B35 4LBNLI**

Issue Date: 2/16/2023



Test Information

Test Method: LM-79-08
Report Number: P843389
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 2/16/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C15DE010B2750 EU4C15B35 4LBNLI
Description: 4in Downlight with BioUp LEDs
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1117.9 lumens
Efficiency: N/A
Efficacy: 65.8 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 17
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843389

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B35 4LBNLI

Luminous Intensity Polar Plot

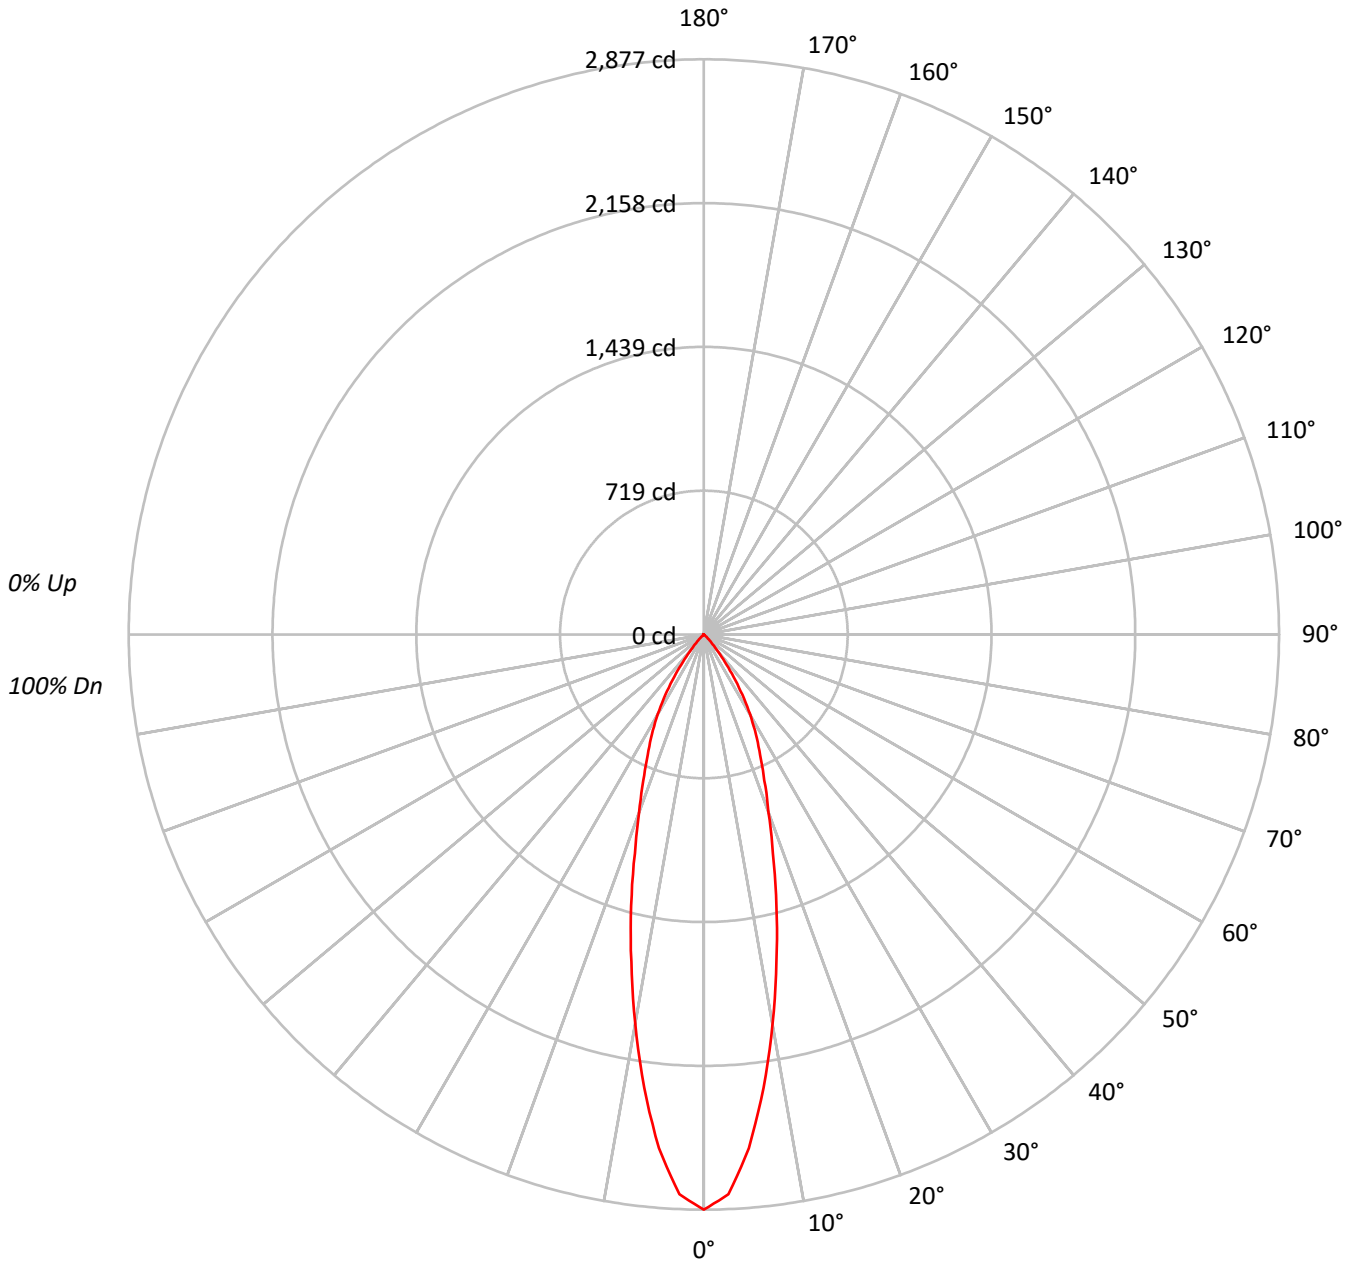



TEST NUMBER: P843389

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B35 4LBNLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	353437
5°	318049
10°	246566
15°	178469
20°	123573
25°	90089
30°	65454
35°	38739
40°	16278
45°	5073
50°	669
55°	364
60°	418
65°	494
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P843389

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B35 4LBNLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.7	20.3
10°-20°	388.1	34.7
20°-30°	308.5	27.6
30°-40°	163.3	14.6
40°-50°	28.1	2.5
50°-60°	2.1	0.2
60°-70°	1.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	923.3	82.6
0°-40°	1086.6	97.2
0°-60°	1116.9	99.9
0°-90°	1117.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1117.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2877	
5°	2579	227
15°	1403	388
25°	665	308
35°	258	163
45°	29	28
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P843389

CATALOG NUMBER: LD4C15DE010B2750 EU4C15B35 4LBNLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2876.9
2.5°	2802.8
5°	2579.0
7.5°	2286.4
10°	1976.5
12.5°	1676.9
15°	1403.2
17.5°	1148.3
20°	945.2
22.5°	790.3
25°	664.6
27.5°	563.0
30°	461.4
32.5°	358.1
35°	258.3
37.5°	170.5
40°	101.5
42.5°	58.6
45°	29.2
47.5°	10.4
50°	3.5
52.5°	3.5
55°	1.7
57.5°	1.7
60°	1.7
62.5°	1.7
65°	1.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)