

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843452

Luminaire Tested: **LD4C20DE010B2750 EU4C20B35 4LBCSMW**

Issue Date: 5/7/2024

**Test Information**

Test Method: LM-79-08  
Report Number: P843452  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206301)  
Test Lab: INNOVATION CENTER  
Issue Date: 5/7/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C20DE010B2750 EU4C20B35 4LBSCMW  
Description: 4in Downlight with BioUp LEDs  
Light Source: -  
Ballast/Driver:

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1658.4 lumens  
Efficiency: N/A  
Efficacy: 76.1 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 21.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P843452

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBCSMW

### Luminous Intensity Polar Plot

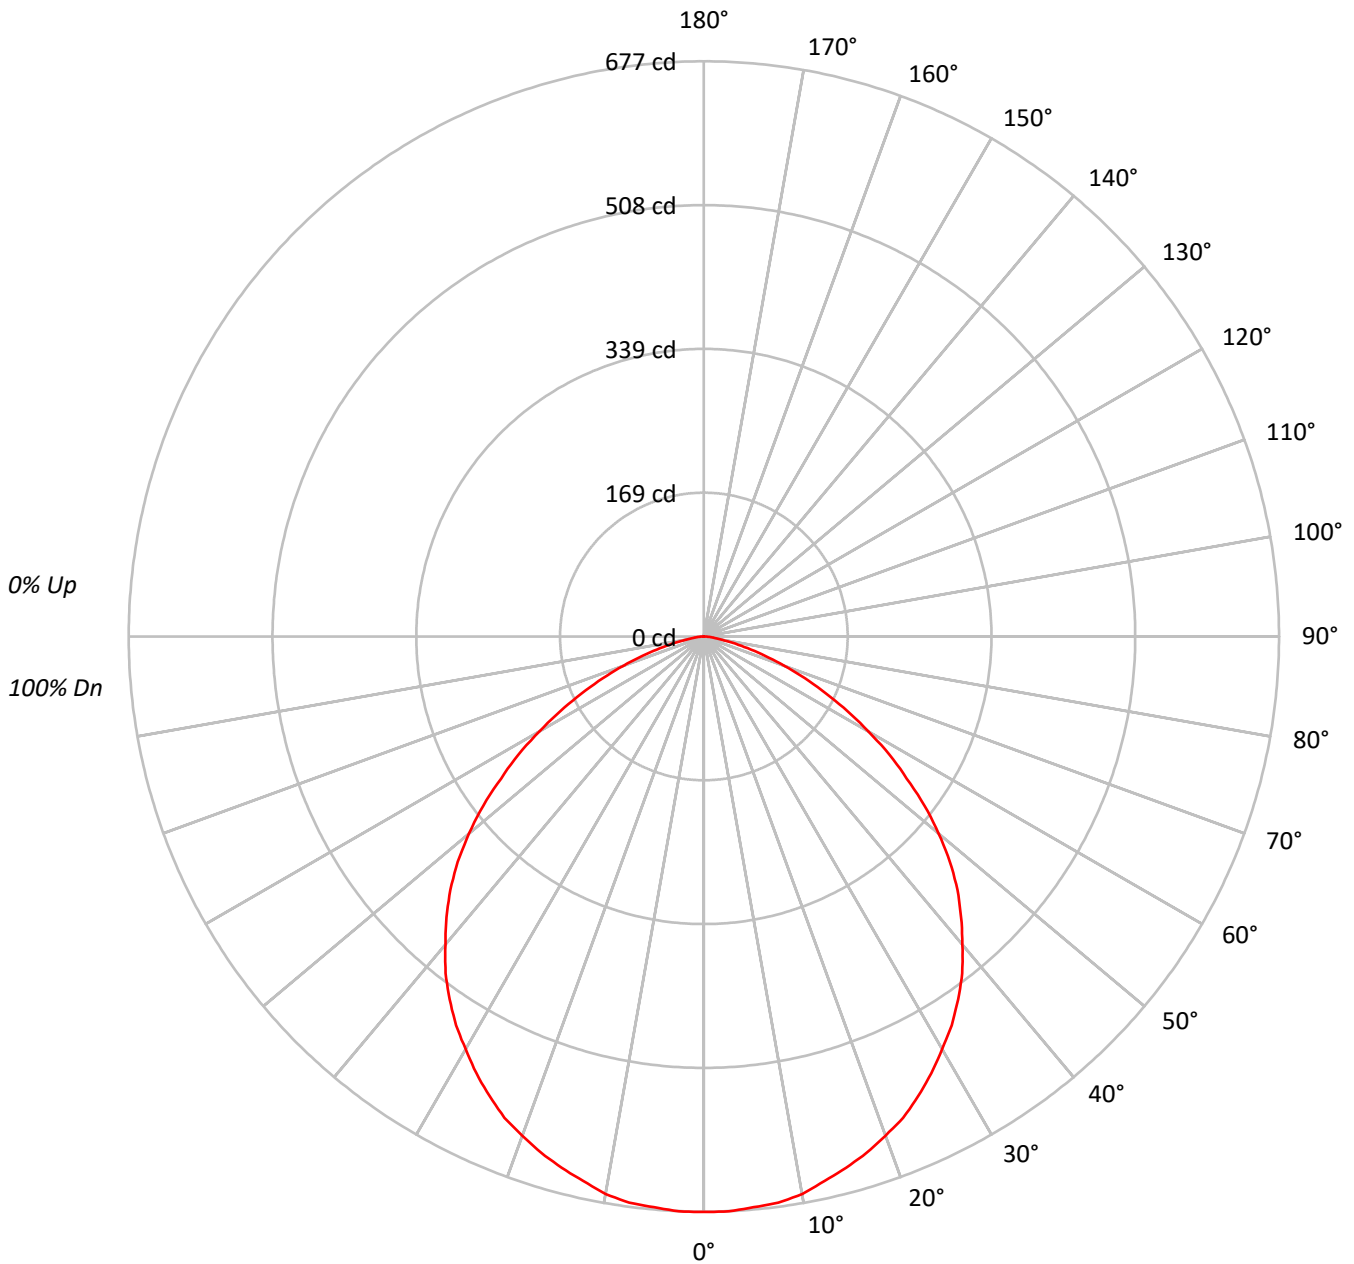



TEST NUMBER: P843452

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBSCMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	83209
5°	83157
10°	83120
15°	82328
20°	81737
25°	80912
30°	79555
35°	78228
40°	75905
45°	73336
50°	68977
55°	62415
60°	54842
65°	46163
70°	36100
75°	25252
80°	14220
85°	9867



TEST NUMBER: P843452

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBCSMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	64.2	3.9
10°-20°	182.7	11.0
20°-30°	274.8	16.6
30°-40°	325.7	19.6
40°-50°	324.1	19.5
50°-60°	261.3	15.8
60°-70°	158.1	9.5
70°-80°	58.7	3.5
80°-90°	8.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	521.7	31.5
0°-40°	847.5	51.1
0°-60°	1432.9	86.4
0°-90°	1658.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1658.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	677	
5°	674	64
15°	647	183
25°	597	275
35°	522	326
45°	422	324
55°	291	261
65°	159	158
75°	53	59
85°	7	9
90°	0	



TEST NUMBER: P843452

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBCSMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	677.3
2.5°	677.3
5°	674.3
7.5°	672.3
10°	666.3
12.5°	656.3
15°	647.3
17.5°	637.2
20°	625.2
22.5°	613.1
25°	596.9
27.5°	579.8
30°	560.8
32.5°	542.7
35°	521.6
37.5°	499.5
40°	473.3
42.5°	448.2
45°	422.1
47.5°	392.9
50°	360.9
52.5°	327.5
55°	291.4
57.5°	259.3
60°	223.2
62.5°	190.9
65°	158.8
67.5°	128.6
70°	100.5
72.5°	75.4
75°	53.2
77.5°	34.2
80°	20.1
82.5°	12.1
85°	7.0
87.5°	3.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)