

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843458

Luminaire Tested: **LD4C20DE010B2750 EU4C20B35 4LBNH**

Issue Date: 2/17/2023



Test Information

Test Method: LM-79-08
Report Number: P843458
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C20DE010B2750 EU4C20B35 4LBNH
Description: 4in Downlight with BioUp LEDs
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1199.4 lumens
Efficiency: N/A
Efficacy: 55.0 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843458

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBNH

Luminous Intensity Polar Plot

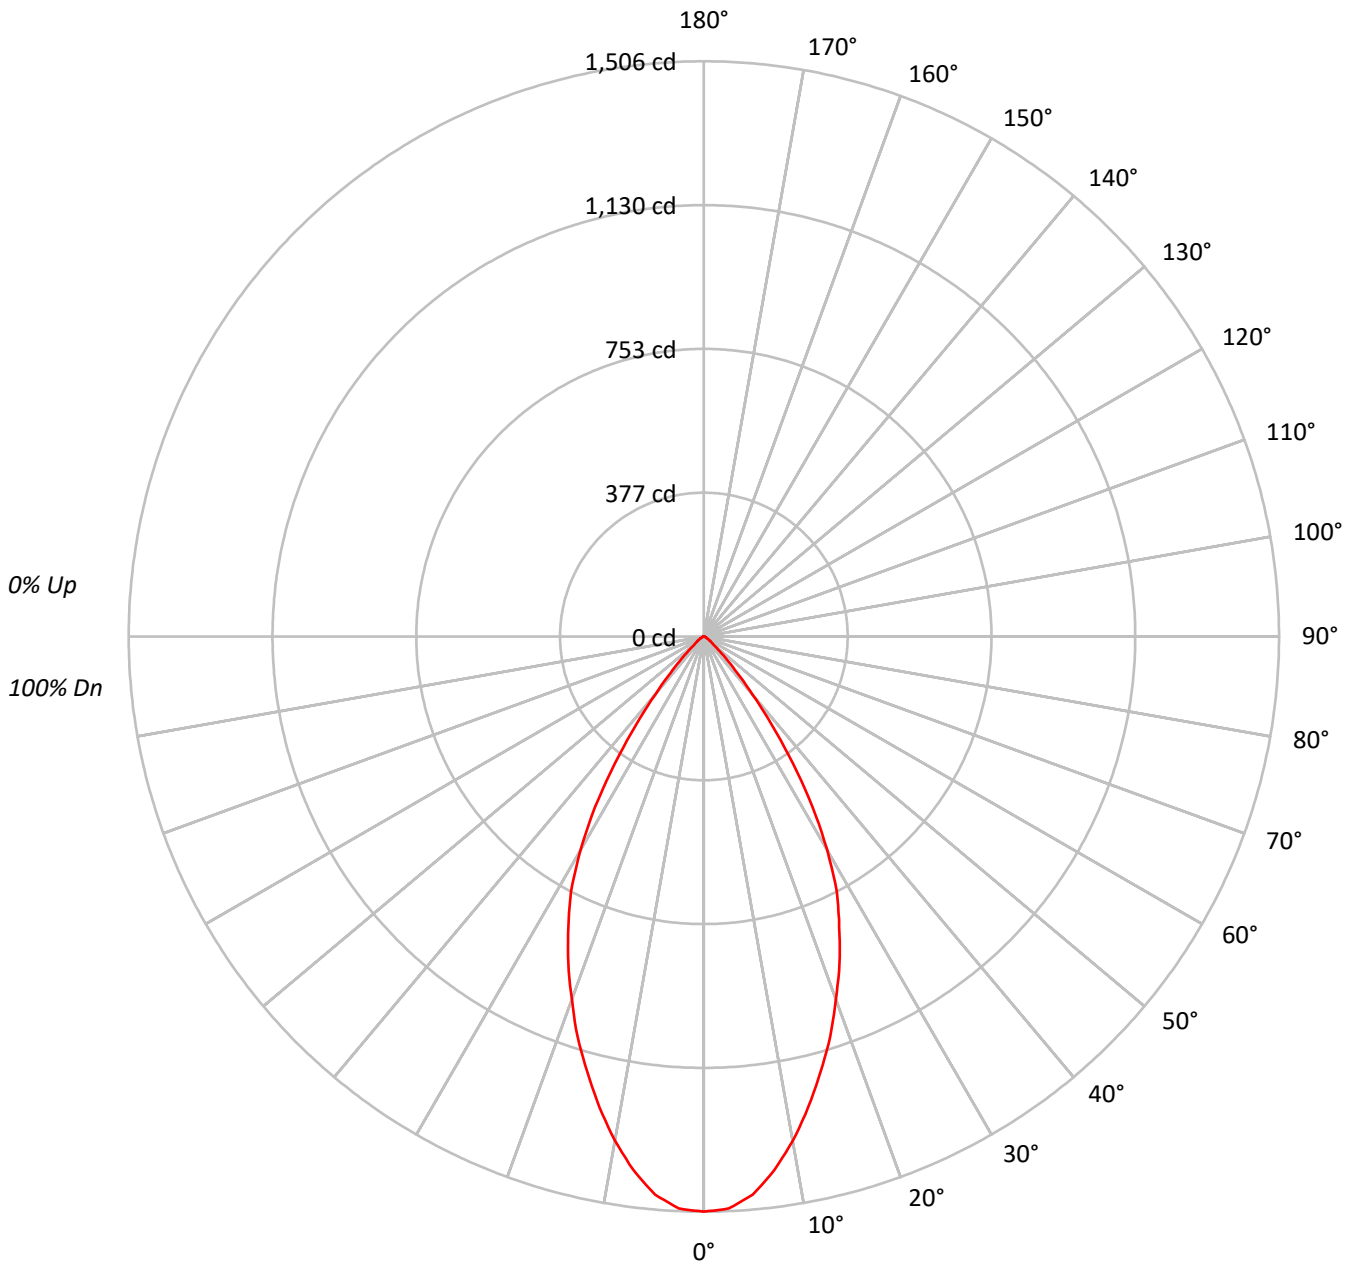



TEST NUMBER: P843458

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBNH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93				93
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87				87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81				81
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75				75
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70				70
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65				65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61				61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58				58
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54				54
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51				51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	185005
5°	180877
10°	167251
15°	150068
20°	132111
25°	113689
30°	91556
35°	60935
40°	31706
45°	14351
50°	6231
55°	4177
60°	2678
65°	1919
70°	1545
75°	1044
80°	0
85°	0



TEST NUMBER: P843458

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBNH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.9	11.3
10°-20°	329.6	27.5
20°-30°	382.6	31.9
30°-40°	253.4	21.1
40°-50°	71.1	5.9
50°-60°	17.9	1.5
60°-70°	6.7	0.6
70°-80°	2.3	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	848.1	70.7
0°-40°	1101.4	91.8
0°-60°	1190.4	99.2
0°-90°	1199.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1199.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1506	
5°	1467	136
15°	1180	330
25°	839	383
35°	406	253
45°	83	71
55°	20	18
65°	7	7
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P843458

CATALOG NUMBER: LD4C20DE010B2750 EU4C20B35 4LBNH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1505.9
2.5°	1499.3
5°	1466.7
7.5°	1410.1
10°	1340.7
12.5°	1262.4
15°	1179.9
17.5°	1099.5
20°	1010.5
22.5°	927.9
25°	838.7
27.5°	754.0
30°	645.4
32.5°	530.2
35°	406.3
37.5°	291.2
40°	197.7
42.5°	128.2
45°	82.6
47.5°	50.0
50°	32.6
52.5°	23.9
55°	19.5
57.5°	15.2
60°	10.9
62.5°	8.7
65°	6.6
67.5°	4.3
70°	4.3
72.5°	2.2
75°	2.2
77.5°	2.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)