

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843262

Luminaire Tested: **LD4C08DE010B2750 EU4C08B40 4LBNH**

Issue Date: 2/17/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P843262  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C08DE010B2750 EU4C08B40 4LBNH  
Description: 4in Downlight with BioUp LEDs  
Light Source: -  
Ballast/Driver:

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 509.9 lumens  
Efficiency: N/A  
Efficacy: 53.1 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 9.6  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P843262

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBNH

### Luminous Intensity Polar Plot

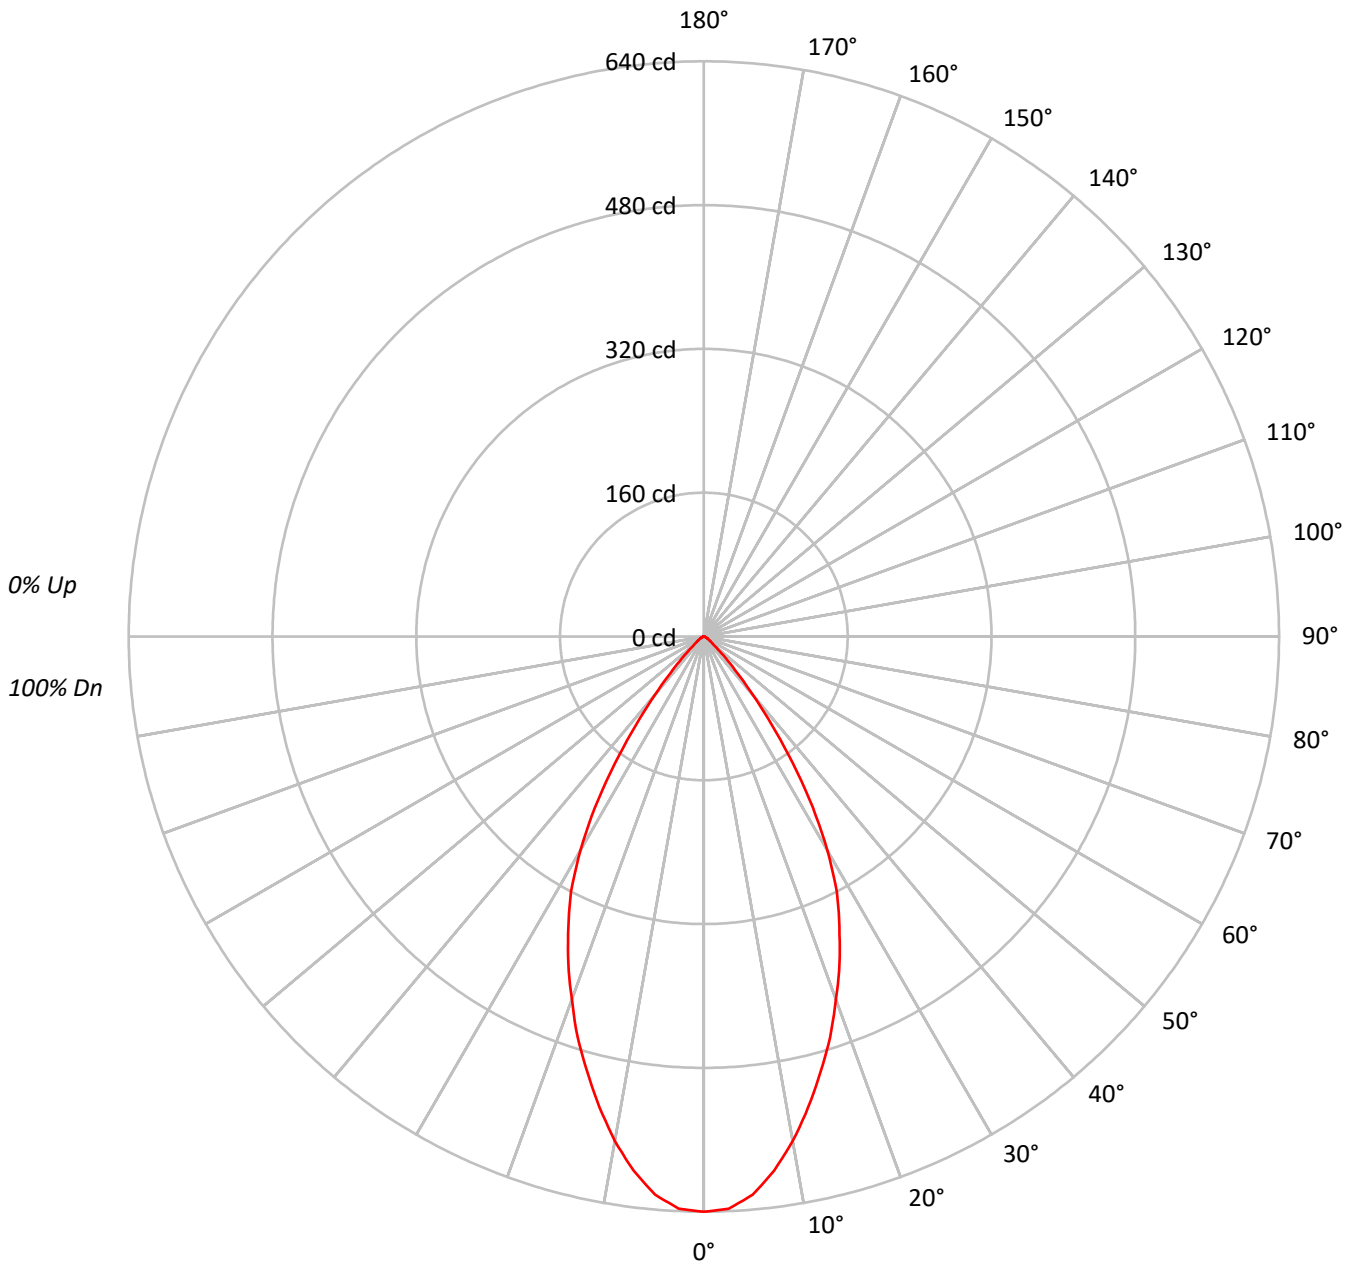



TEST NUMBER: P843262

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBNH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	76	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	78639
5°	76879
10°	71094
15°	63784
20°	56152
25°	48325
30°	38926
35°	25901
40°	13471
45°	6098
50°	2657
55°	1756
60°	1155
65°	785
70°	682
75°	475
80°	0
85°	0



TEST NUMBER: P843262

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBNH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	57.7	11.3
10°-20°	140.1	27.5
20°-30°	162.6	31.9
30°-40°	107.7	21.1
40°-50°	30.2	5.9
50°-60°	7.6	1.5
60°-70°	2.9	0.6
70°-80°	1.0	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	360.5	70.7
0°-40°	468.2	91.8
0°-60°	506.0	99.2
0°-90°	509.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	509.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	640	
5°	623	58
15°	502	140
25°	356	163
35°	173	108
45°	35	30
55°	8	8
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P843262

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBNH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	640.1
2.5°	637.2
5°	623.4
7.5°	599.4
10°	569.9
12.5°	536.5
15°	501.5
17.5°	467.4
20°	429.5
22.5°	394.4
25°	356.5
27.5°	320.5
30°	274.4
32.5°	225.4
35°	172.7
37.5°	123.7
40°	84.0
42.5°	54.5
45°	35.1
47.5°	21.3
50°	13.9
52.5°	10.2
55°	8.2
57.5°	6.5
60°	4.7
62.5°	3.7
65°	2.7
67.5°	1.9
70°	1.9
72.5°	1.0
75°	1.0
77.5°	1.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)