

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843267

Luminaire Tested: **LD4C08DE010B2750 EU4C08B40 4LBWLI**

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-08
Report Number: P843267
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C08DE010B2750 EU4C08B40 4LBWLI
Description: 4in Downlight with BioUp LEDs
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 808.1 lumens
Efficiency: N/A
Efficacy: 84.2 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843267

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBWLI

Luminous Intensity Polar Plot

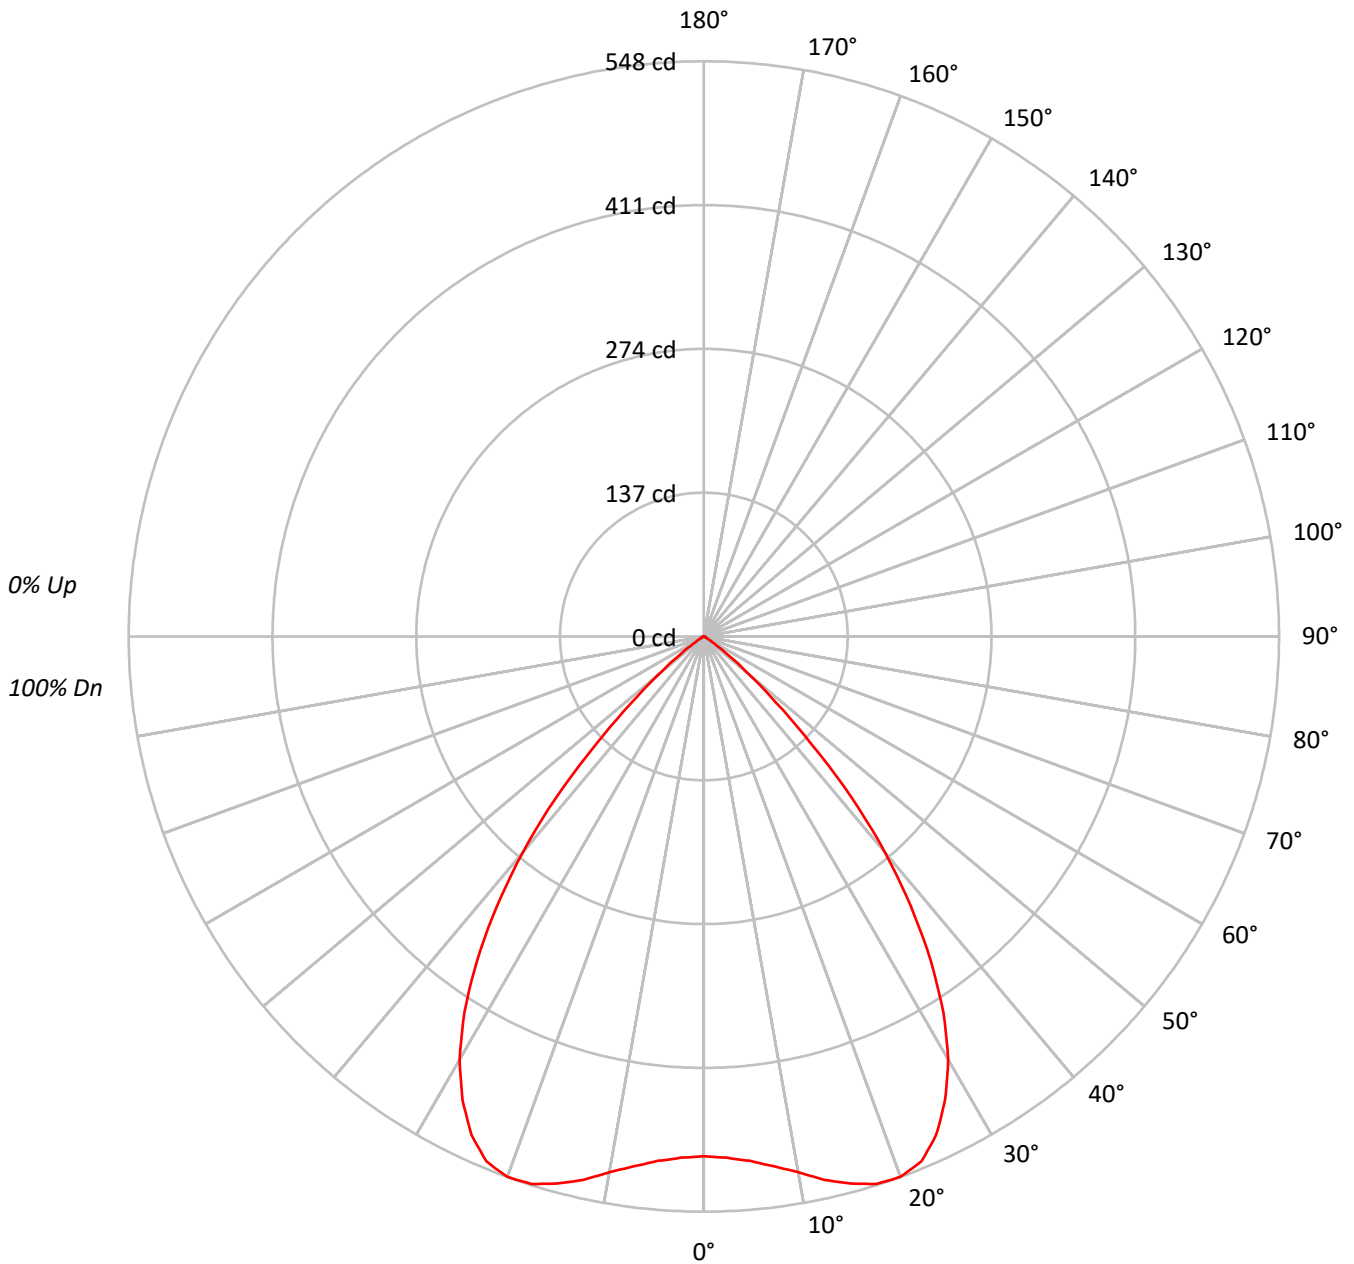



TEST NUMBER: P843267

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBWLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77	77	77	77
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54	54	54	54
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49	49	49	49
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45	45	45	45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42	42	42	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60825
5°	61846
10°	64645
15°	68618
20°	71631
25°	71003
30°	66035
35°	56481
40°	43028
45°	25245
50°	10799
55°	3170
60°	909
65°	552
70°	359
75°	475
80°	0
85°	0



TEST NUMBER: P843267

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBWLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.4	6.0
10°-20°	152.8	18.9
20°-30°	238.4	29.5
30°-40°	231.9	28.7
40°-50°	115.9	14.3
50°-60°	18.0	2.2
60°-70°	2.2	0.3
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	439.6	54.4
0°-40°	671.4	83.1
0°-60°	805.2	99.6
0°-90°	808.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	808.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	495	
5°	502	48
15°	540	153
25°	524	238
35°	377	232
45°	145	116
55°	15	18
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P843267

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B40 4LBWLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	495.1
2.5°	497.0
5°	501.5
7.5°	508.9
10°	518.2
12.5°	530.2
15°	539.5
17.5°	546.9
20°	547.9
22.5°	541.4
25°	523.8
27.5°	497.8
30°	465.5
32.5°	424.7
35°	376.6
37.5°	323.8
40°	268.3
42.5°	209.2
45°	145.3
47.5°	93.5
50°	56.5
52.5°	30.6
55°	14.8
57.5°	6.5
60°	3.7
62.5°	2.7
65°	1.9
67.5°	1.9
70°	1.0
72.5°	1.0
75°	1.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)