

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843274

Luminaire Tested: **LD4C08DE010B2750 EU4C08B50 4LBMH**

Issue Date: 2/17/2023



Test Information

Test Method: LM-79-08
Report Number: P843274
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C08DE010B2750 EU4C08B50 4LBMH
Description: 4in Downlight with BioUp LEDs
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 655.8 lumens
Efficiency: N/A
Efficacy: 68.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843274

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B50 4LBMH

Luminous Intensity Polar Plot

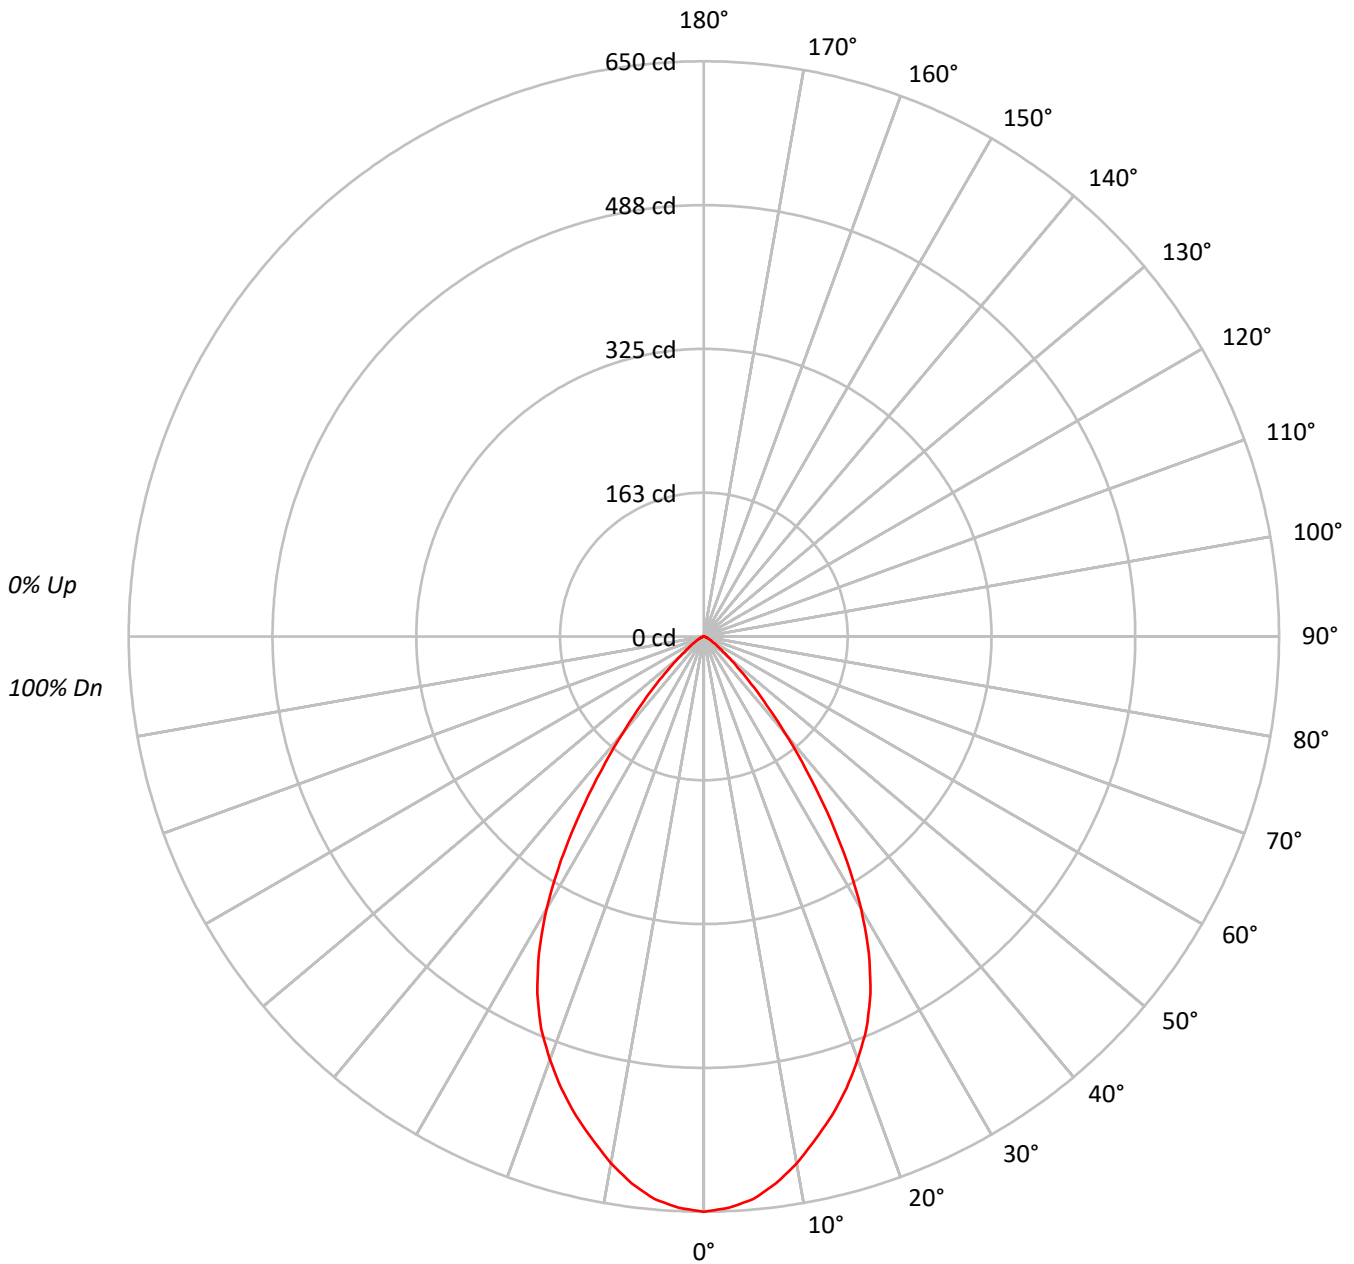



TEST NUMBER: P843274

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B50 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79			79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73			73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67			67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62			62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58			58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54			54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50			50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	79879
5°	78717
10°	75423
15°	71238
20°	66493
25°	60376
30°	50402
35°	36519
40°	22869
45°	13065
50°	6804
55°	3813
60°	2432
65°	1453
70°	1078
75°	475
80°	707
85°	0



TEST NUMBER: P843274

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B50 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.8	9.1
10°-20°	156.9	23.9
20°-30°	201.7	30.8
30°-40°	151.8	23.1
40°-50°	61.0	9.3
50°-60°	17.3	2.6
60°-70°	5.5	0.8
70°-80°	1.6	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	418.5	63.8
0°-40°	570.3	87.0
0°-60°	648.5	98.9
0°-90°	655.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	655.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	650	
5°	638	60
15°	560	157
25°	445	202
35°	244	152
45°	75	61
55°	18	17
65°	5	6
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P843274

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B50 4LBMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	650.2
2.5°	646.2
5°	638.3
7.5°	623.5
10°	604.6
12.5°	581.9
15°	560.1
17.5°	535.4
20°	508.6
22.5°	480.0
25°	445.4
27.5°	403.8
30°	355.3
32.5°	300.8
35°	243.5
37.5°	190.0
40°	142.6
42.5°	104.9
45°	75.2
47.5°	51.5
50°	35.6
52.5°	24.7
55°	17.8
57.5°	12.9
60°	9.9
62.5°	7.0
65°	5.0
67.5°	3.9
70°	3.0
72.5°	2.0
75°	1.0
77.5°	1.0
80°	1.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)