

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843459

Luminaire Tested: **LD4C20DE010B35 EU4C20B35 4LBNLI**

Issue Date: 2/16/2023

**Test Information**

Test Method: LM-79-08  
Report Number: P843459  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/16/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C20DE010B35 EU4C20B35 4LBNLI  
Description: 4in Downlight with BioUp LEDs  
Light Source: -  
Ballast/Driver:

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1413.0 lumens  
Efficiency: N/A  
Efficacy: 64.8 lumens/watt  
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 21.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P843459

CATALOG NUMBER: LD4C20DE010B35 EU4C20B35 4LBNLI

### Luminous Intensity Polar Plot

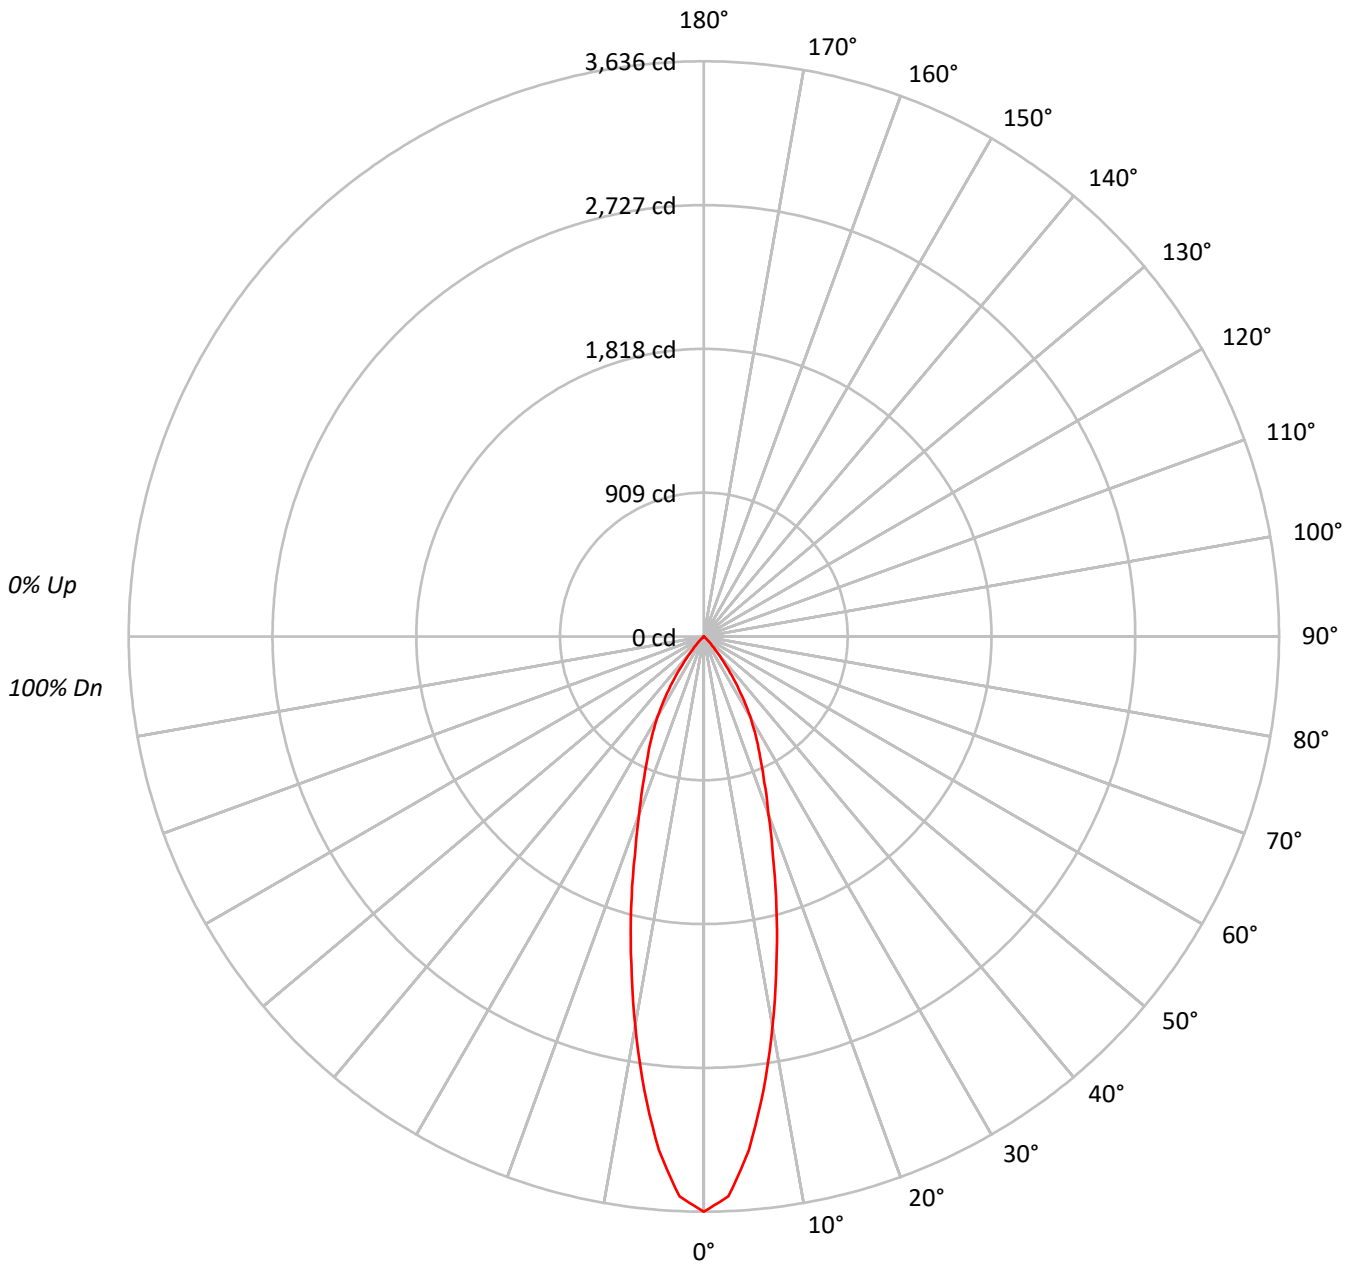



TEST NUMBER: P843459

CATALOG NUMBER: LD4C20DE010B35 EU4C20B35 4LBNLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	446732
5°	402008
10°	311635
15°	225567
20°	156180
25°	113865
30°	82732
35°	48952
40°	20592
45°	6411
50°	822
55°	471
60°	541
65°	640
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P843459

CATALOG NUMBER: LD4C20DE010B35 EU4C20B35 4LBNLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	286.6	20.3
10°-20°	490.6	34.7
20°-30°	389.9	27.6
30°-40°	206.4	14.6
40°-50°	35.5	2.5
50°-60°	2.7	0.2
60°-70°	1.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1167.0	82.6
0°-40°	1373.4	97.2
0°-60°	1411.6	99.9
0°-90°	1413.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1413.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3636	
5°	3260	287
15°	1774	491
25°	840	390
35°	326	206
45°	37	36
55°	2	3
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P843459

CATALOG NUMBER: LD4C20DE010B35 EU4C20B35 4LBNLI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3636.3
2.5°	3542.6
5°	3259.8
7.5°	2889.9
10°	2498.1
12.5°	2119.5
15°	1773.5
17.5°	1451.4
20°	1194.6
22.5°	998.8
25°	840.0
27.5°	711.6
30°	583.2
32.5°	452.7
35°	326.4
37.5°	215.4
40°	128.4
42.5°	74.0
45°	36.9
47.5°	13.1
50°	4.3
52.5°	4.3
55°	2.2
57.5°	2.2
60°	2.2
62.5°	2.2
65°	2.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)