

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760015

Luminaire Tested: LD6D10D010-EU6DR200210IC9024-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760015  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR200210IC9024-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 960.8 lumens  
Efficiency: N/A  
Efficacy: 82.1 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760015  
CATALOG NUMBER: LD6D10D010-EU6DR200210IC9024-6LBS1MW

### Luminous Intensity Polar Plot

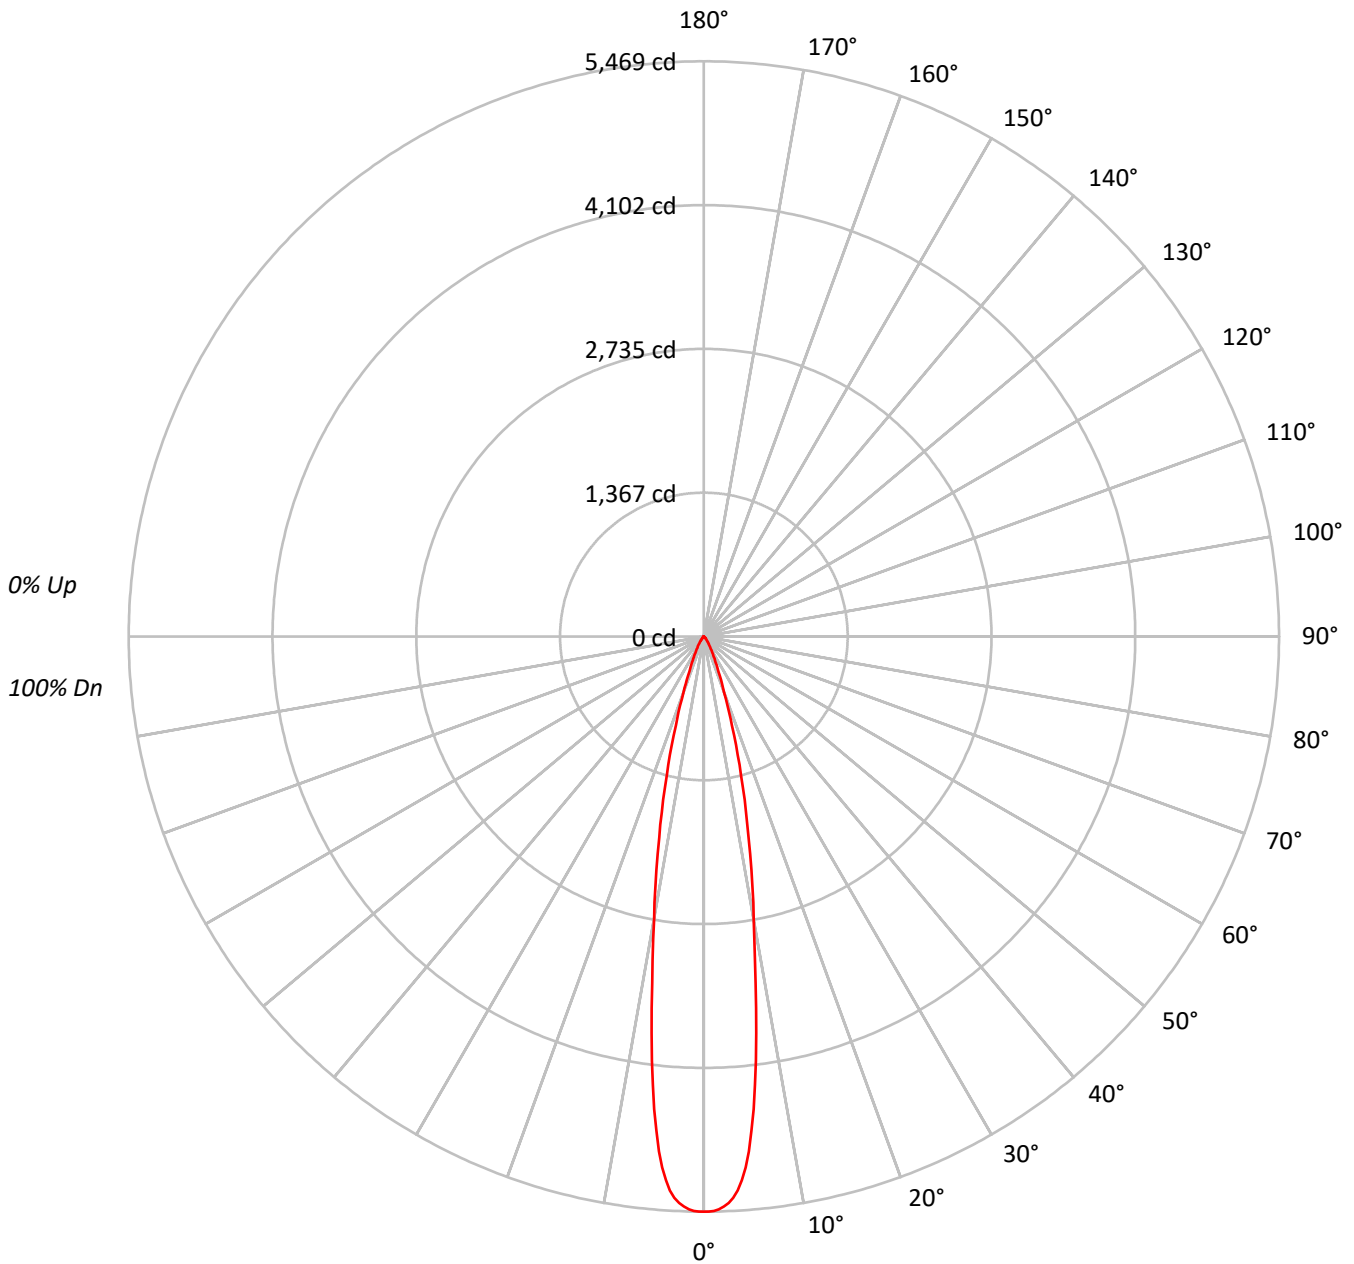



TEST NUMBER: P760015

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9024-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	597547
5°	539101
10°	302573
15°	153803
20°	65113
25°	30055
30°	15909
35°	8577
40°	4578
45°	2704
50°	1581
55°	838
60°	524
65°	388
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2704 cd/sqm



TEST NUMBER: P760015

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9024-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	389.4	40.5
10°-20°	383.4	39.9
20°-30°	125.2	13.0
30°-40°	42.6	4.4
40°-50°	14.3	1.5
50°-60°	4.3	0.4
60°-70°	1.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	898.0	93.5
0°-40°	940.7	97.9
0°-60°	959.3	99.8
0°-90°	960.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	960.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5469	
5°	4915	389
15°	1360	383
25°	249	125
35°	64	43
45°	18	14
55°	4	4
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760015

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9024-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5469.0
0.5°	5469.0
1°	5462.2
1.5°	5448.5
2°	5423.7
2.5°	5390.6
3°	5343.8
3.5°	5278.6
4°	5181.7
4.5°	5063.8
5°	4915.3
5.5°	4720.0
6°	4519.8
6.5°	4290.5
7°	4065.9
7.5°	3803.0
8°	3568.2
8.5°	3332.0
9°	3113.9
9.5°	2913.7
10°	2727.2
12.5°	1958.2
15°	1359.7
17.5°	888.3
20°	560.0
22.5°	362.8
25°	249.3
27.5°	175.3
30°	126.1
32.5°	90.6
35°	64.3
37.5°	44.8
40°	32.1
42.5°	23.4
45°	17.5
47.5°	13.6
50°	9.3
52.5°	5.8
55°	4.4
57.5°	3.4
60°	2.4
62.5°	1.9
65°	1.5



TEST NUMBER: P760015  
CATALOG NUMBER: LD6D10D010-EU6DR200210IC9024-6LBS1MW

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.0
70°		0.5

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)