

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760167

Luminaire Tested: LD6D10D010-EU6DR300210IC9024-6LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760167  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR300210IC9024-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 789.9 lumens  
Efficiency: N/A  
Efficacy: 67.5 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760167

CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBDP1MW

### Luminous Intensity Polar Plot

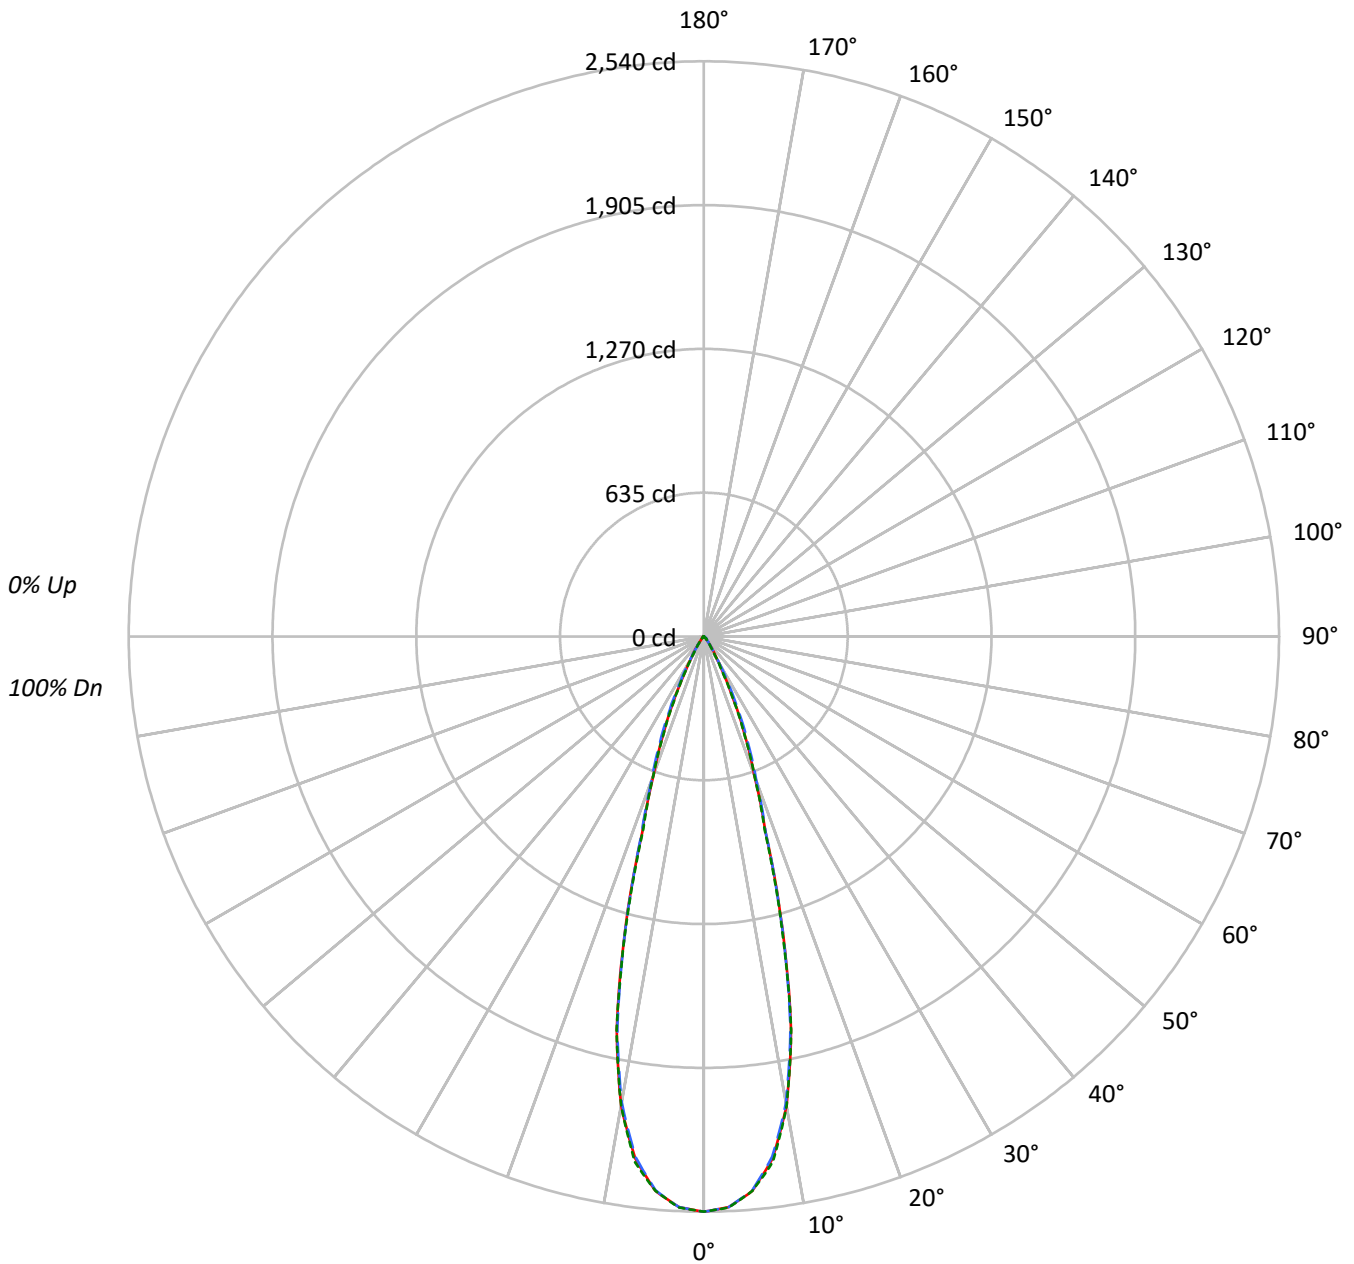



TEST NUMBER: P760167

CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	194413	194413	194413
5°	188832	188609	188839
10°	163555	162397	163516
15°	106709	106139	105608
20°	53060	55056	52987
25°	26730	30142	26181
30°	10703	11667	9325
35°	4962	4756	3981
40°	2138	2378	2018
45°	1515	1884	1526
50°	524	1369	548
55°	294	560	307
60°	214	245	214
65°	127	127	127
70°	90	45	90
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1884 cd/sqm



TEST NUMBER: P760167

CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	223.3	28.3
10°-20°	359.7	45.5
20°-30°	155.4	19.7
30°-40°	35.4	4.5
40°-50°	12.2	1.5
50°-60°	3.0	0.4
60°-70°	0.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	738.5	93.5
0°-40°	773.9	98.0
0°-60°	789.0	99.9
0°-90°	789.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	789.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2540	2540	2540	2540	2540	
5°	2458	2455	2455	2460	2458	224
15°	1347	1330	1339	1335	1333	361
25°	316	328	357	320	310	151
35°	53	54	51	50	43	36
45°	14	17	17	17	14	10
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P760167

CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2539.9	2539.9	2539.9	2539.9	2539.9
2.5°	2523.0	2521.3	2522.3	2523.6	2524.0
5°	2457.6	2455.2	2454.7	2459.8	2457.7
7.5°	2325.5	2322.2	2317.0	2328.6	2339.5
10°	2104.3	2100.6	2089.4	2094.9	2103.8
12.5°	1777.7	1765.6	1765.4	1782.9	1780.4
15°	1346.6	1330.4	1339.4	1335.0	1332.7
17.5°	905.5	899.3	911.3	907.7	892.1
20°	651.4	653.0	675.9	664.4	650.5
22.5°	475.4	481.2	508.3	478.7	467.9
25°	316.5	328.5	356.9	320.1	310.0
27.5°	194.6	200.1	229.0	192.2	186.7
30°	121.1	118.3	132.0	113.2	105.5
32.5°	79.4	75.9	80.3	72.1	65.8
35°	53.1	54.3	50.9	50.5	42.6
37.5°	33.2	38.2	33.7	35.9	27.4
40°	21.4	27.7	23.8	26.3	20.2
42.5°	17.6	21.3	19.6	20.8	17.9
45°	14.0	17.4	17.4	17.4	14.1
47.5°	7.7	11.6	14.8	11.9	8.3
50°	4.4	5.8	11.5	6.1	4.6
52.5°	3.0	3.4	7.8	3.5	3.1
55°	2.2	2.3	4.2	2.5	2.3
57.5°	1.7	1.9	2.2	1.9	1.7
60°	1.4	1.4	1.6	1.5	1.4
62.5°	1.0	1.0	1.1	1.0	1.0
65°	0.7	0.7	0.7	0.7	0.7
67.5°	0.4	0.5	0.5	0.5	0.5
70°	0.4	0.2	0.2	0.2	0.4
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)