

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760168

Luminaire Tested: LD6D10D010-EU6DR300210IC9024-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P760168
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D10D010-EU6DR300210IC9024-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 873.9 lumens
Efficiency: N/A
Efficacy: 74.7 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P760168
CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBS1B

Luminous Intensity Polar Plot

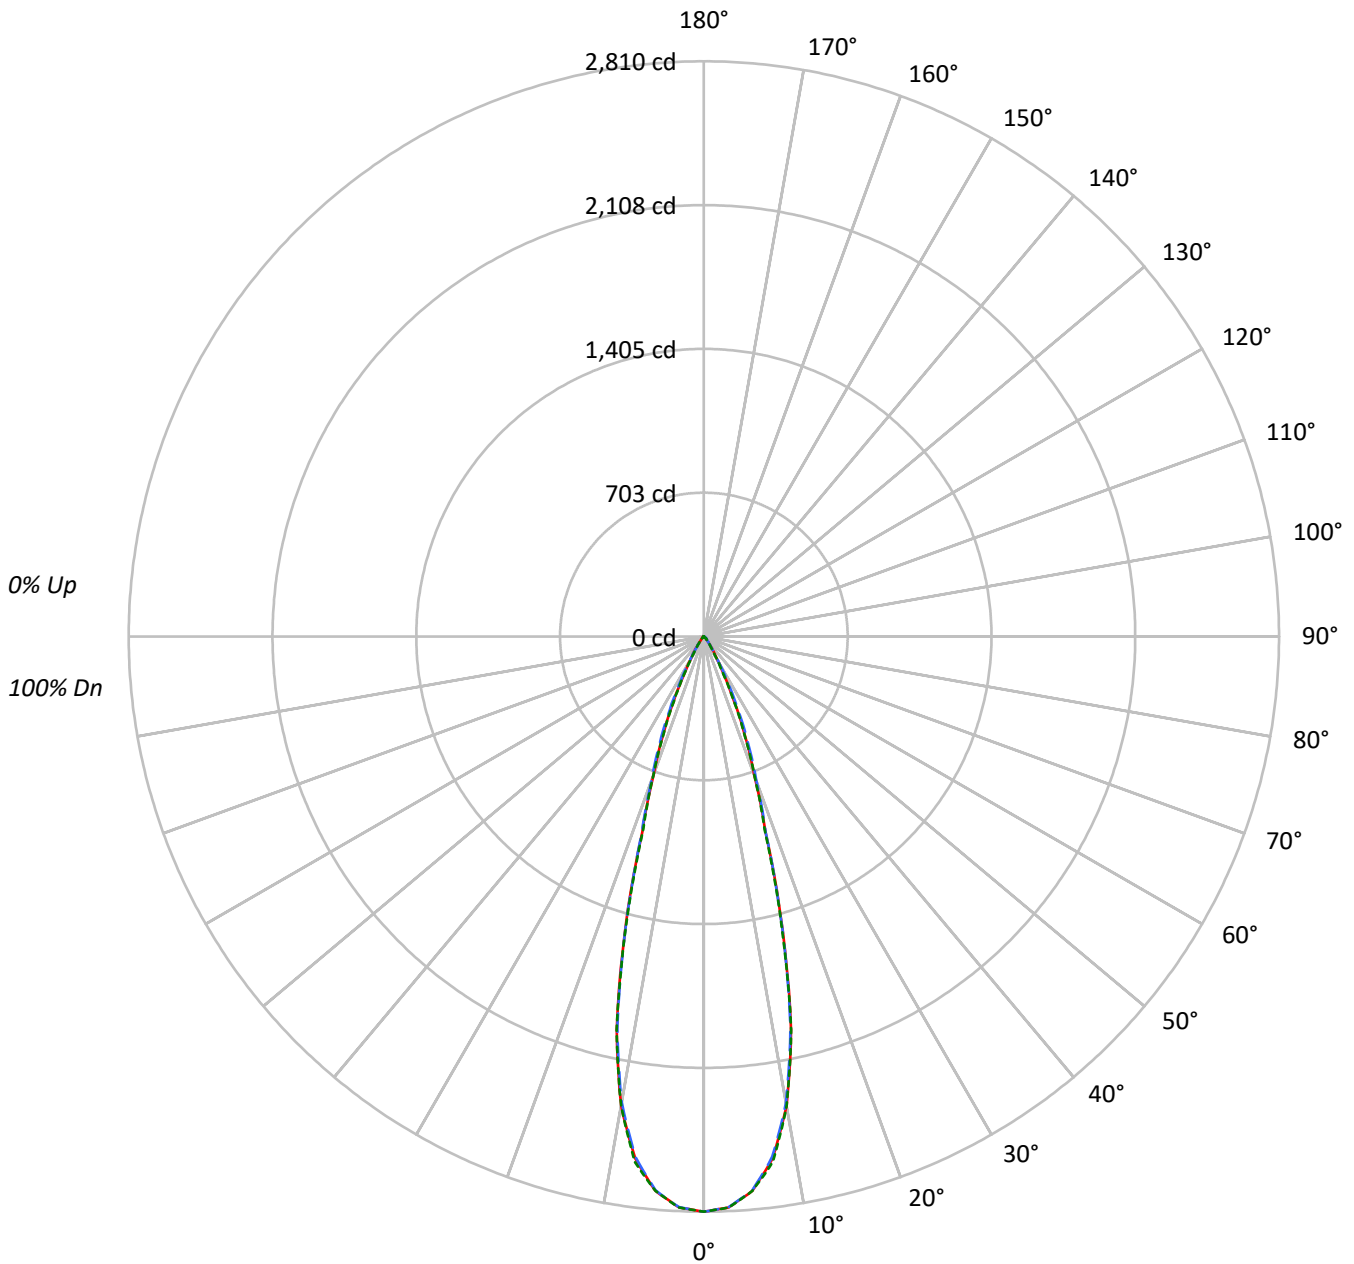



TEST NUMBER: P760168

CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	215087	215087	215087
5°	208909	208671	208924
10°	180950	179675	180911
15°	118057	117423	116837
20°	58705	60913	58624
25°	29568	33343	28969
30°	11844	12904	10314
35°	5494	5261	4410
40°	2368	2638	2228
45°	1678	2078	1689
50°	572	1512	607
55°	334	627	347
60°	230	276	230
65°	145	145	145
70°	90	67	90
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 2078 cd/sqm



TEST NUMBER: P760168

CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	247.1	28.3
10°-20°	397.9	45.5
20°-30°	172.0	19.7
30°-40°	39.2	4.5
40°-50°	13.5	1.5
50°-60°	3.3	0.4
60°-70°	0.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	817.0	93.5
0°-40°	856.2	98.0
0°-60°	873.0	99.9
0°-90°	873.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	873.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2810	2810	2810	2810	2810	
5°	2719	2716	2716	2721	2719	247
15°	1490	1472	1482	1477	1474	399
25°	350	363	395	354	343	168
35°	59	60	56	56	47	40
45°	16	19	19	19	16	11
55°	2	3	5	3	3	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P760168

CATALOG NUMBER: LD6D10D010-EU6DR300210IC9024-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2810.0	2810.0	2810.0	2810.0	2810.0
2.5°	2791.4	2789.4	2790.6	2791.9	2792.4
5°	2718.9	2716.3	2715.8	2721.4	2719.1
7.5°	2572.8	2569.1	2563.4	2576.3	2588.3
10°	2328.1	2323.9	2311.7	2317.8	2327.6
12.5°	1966.8	1953.4	1953.1	1972.4	1969.8
15°	1489.8	1471.9	1481.8	1477.0	1474.4
17.5°	1001.9	995.0	1008.2	1004.2	987.0
20°	720.7	722.5	747.8	735.0	719.7
22.5°	525.9	532.4	562.4	529.6	517.6
25°	350.1	363.4	394.8	354.1	343.0
27.5°	215.4	221.4	253.3	212.6	206.5
30°	134.0	130.9	146.0	125.2	116.7
32.5°	87.9	84.0	88.9	79.8	72.8
35°	58.8	60.0	56.3	55.9	47.2
37.5°	36.7	42.2	37.2	39.7	30.4
40°	23.7	30.7	26.4	29.1	22.3
42.5°	19.5	23.6	21.7	23.0	19.9
45°	15.5	19.2	19.2	19.2	15.6
47.5°	8.5	12.8	16.4	13.1	9.1
50°	4.8	6.5	12.7	6.8	5.1
52.5°	3.3	3.7	8.7	3.8	3.4
55°	2.5	2.6	4.7	2.8	2.6
57.5°	1.9	2.1	2.5	2.1	1.9
60°	1.5	1.5	1.8	1.7	1.5
62.5°	1.1	1.1	1.3	1.1	1.1
65°	0.8	0.8	0.8	0.8	0.8
67.5°	0.4	0.6	0.6	0.6	0.6
70°	0.4	0.3	0.3	0.3	0.4
72.5°	0.3	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)