

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760024

Luminaire Tested: LD6D10D010-EU6DR200210IC9027-6LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760024  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR200210IC9027-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 983.1 lumens  
Efficiency: N/A  
Efficacy: 84.0 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760024

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9027-6LBDP1MW

### Luminous Intensity Polar Plot

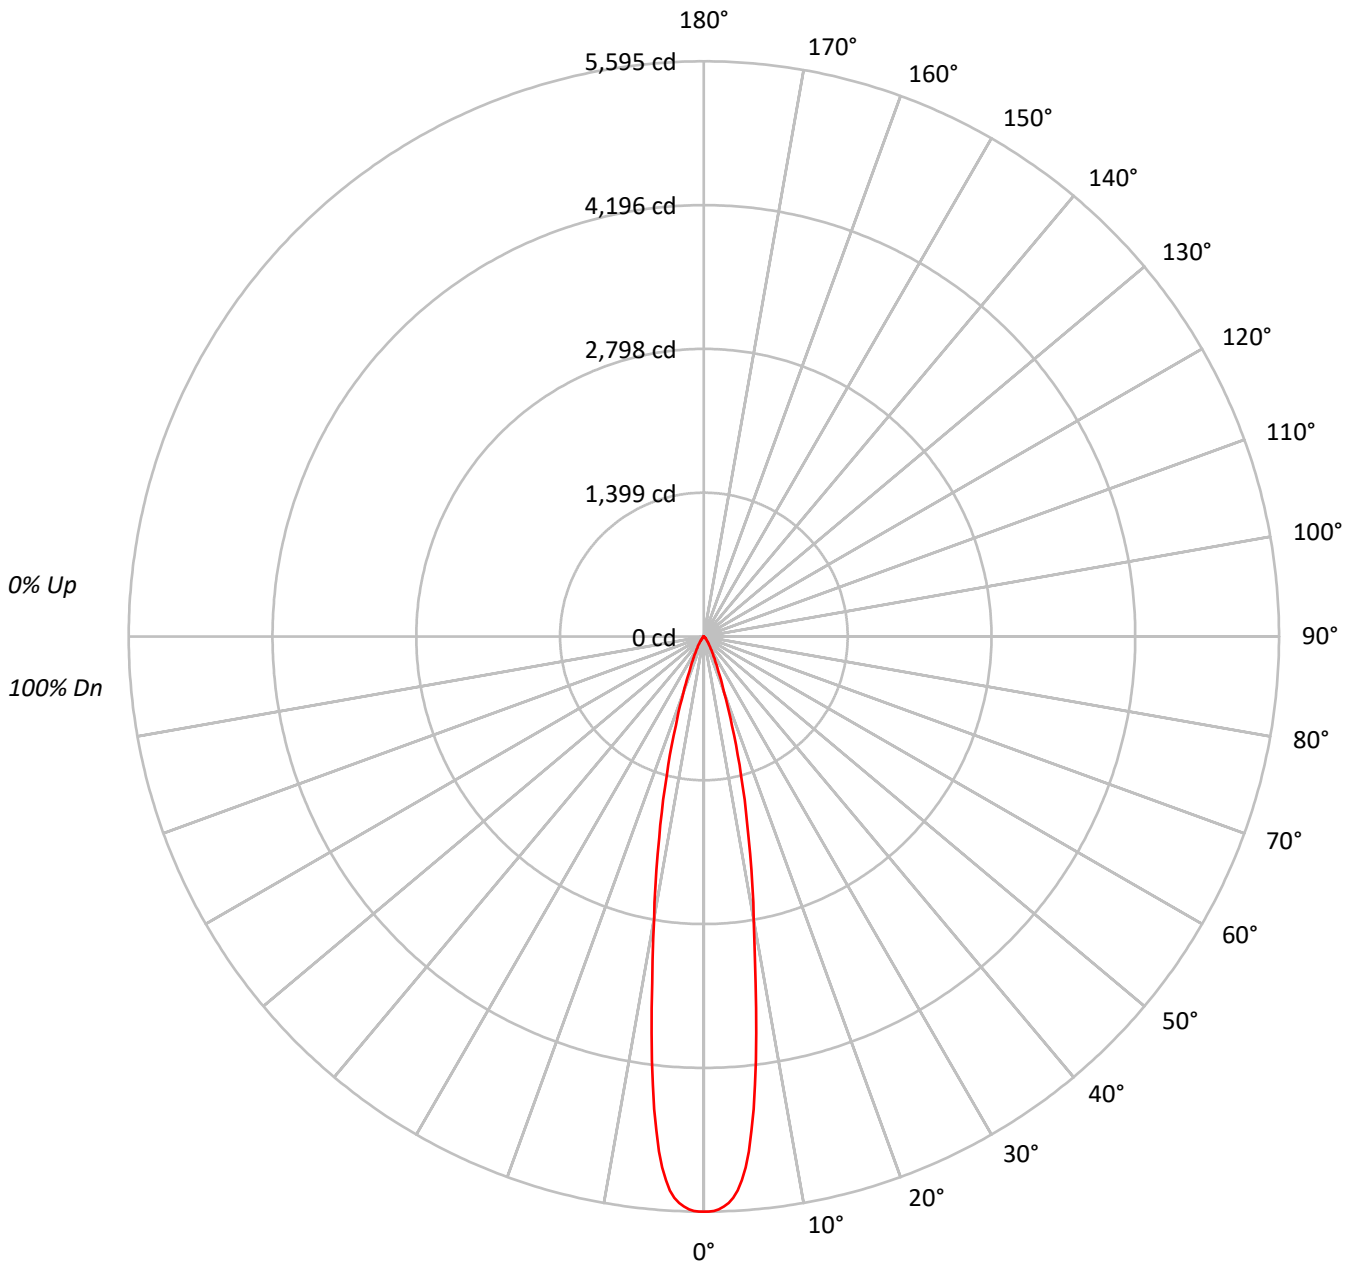



TEST NUMBER: P760024

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9027-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	96	95															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	96	94	93															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	94	92	91															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	92	90	89															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	90	88	87															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	88	86	85															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	86	84	83															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	84	82	81															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	611325
5°	551538
10°	309551
15°	157354
20°	66624
25°	30754
30°	16275
35°	8777
40°	4693
45°	2766
50°	1615
55°	857
60°	546
65°	388
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2766 cd/sqm



TEST NUMBER: P760024

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9027-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	398.4	40.5
10°-20°	392.3	39.9
20°-30°	128.2	13.0
30°-40°	43.6	4.4
40°-50°	14.7	1.5
50°-60°	4.4	0.5
60°-70°	1.5	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	918.8	93.5
0°-40°	962.4	97.9
0°-60°	981.5	99.8
0°-90°	983.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	983.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5595	
5°	5029	398
15°	1391	392
25°	255	128
35°	66	44
45°	18	15
55°	4	4
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760024

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9027-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5595.1
0.5°	5595.1
1°	5588.2
1.5°	5574.2
2°	5548.8
2.5°	5514.9
3°	5467.1
3.5°	5400.3
4°	5301.2
4.5°	5180.6
5°	5028.7
5.5°	4828.9
6°	4624.1
6.5°	4389.4
7°	4159.7
7.5°	3890.7
8°	3650.5
8.5°	3408.9
9°	3185.7
9.5°	2980.9
10°	2790.1
12.5°	2003.4
15°	1391.1
17.5°	908.8
20°	573.0
22.5°	371.2
25°	255.1
27.5°	179.4
30°	129.0
32.5°	92.7
35°	65.8
37.5°	45.8
40°	32.9
42.5°	23.9
45°	17.9
47.5°	14.0
50°	9.5
52.5°	6.0
55°	4.5
57.5°	3.5
60°	2.5
62.5°	2.0
65°	1.5



TEST NUMBER: P760024

CATALOG NUMBER: LD6D10D010-EU6DR200210IC9027-6LBDP1MW

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.0
70°		0.5

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)