

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760648

Luminaire Tested: LD6D10D010-EU6DR600210IC9027-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P760648
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D10D010-EU6DR600210IC9027-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 914.2 lumens
Efficiency: N/A
Efficacy: 78.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P760648

CATALOG NUMBER: LD6D10D010-EU6DR600210IC9027-6LBDP1MW

Luminous Intensity Polar Plot

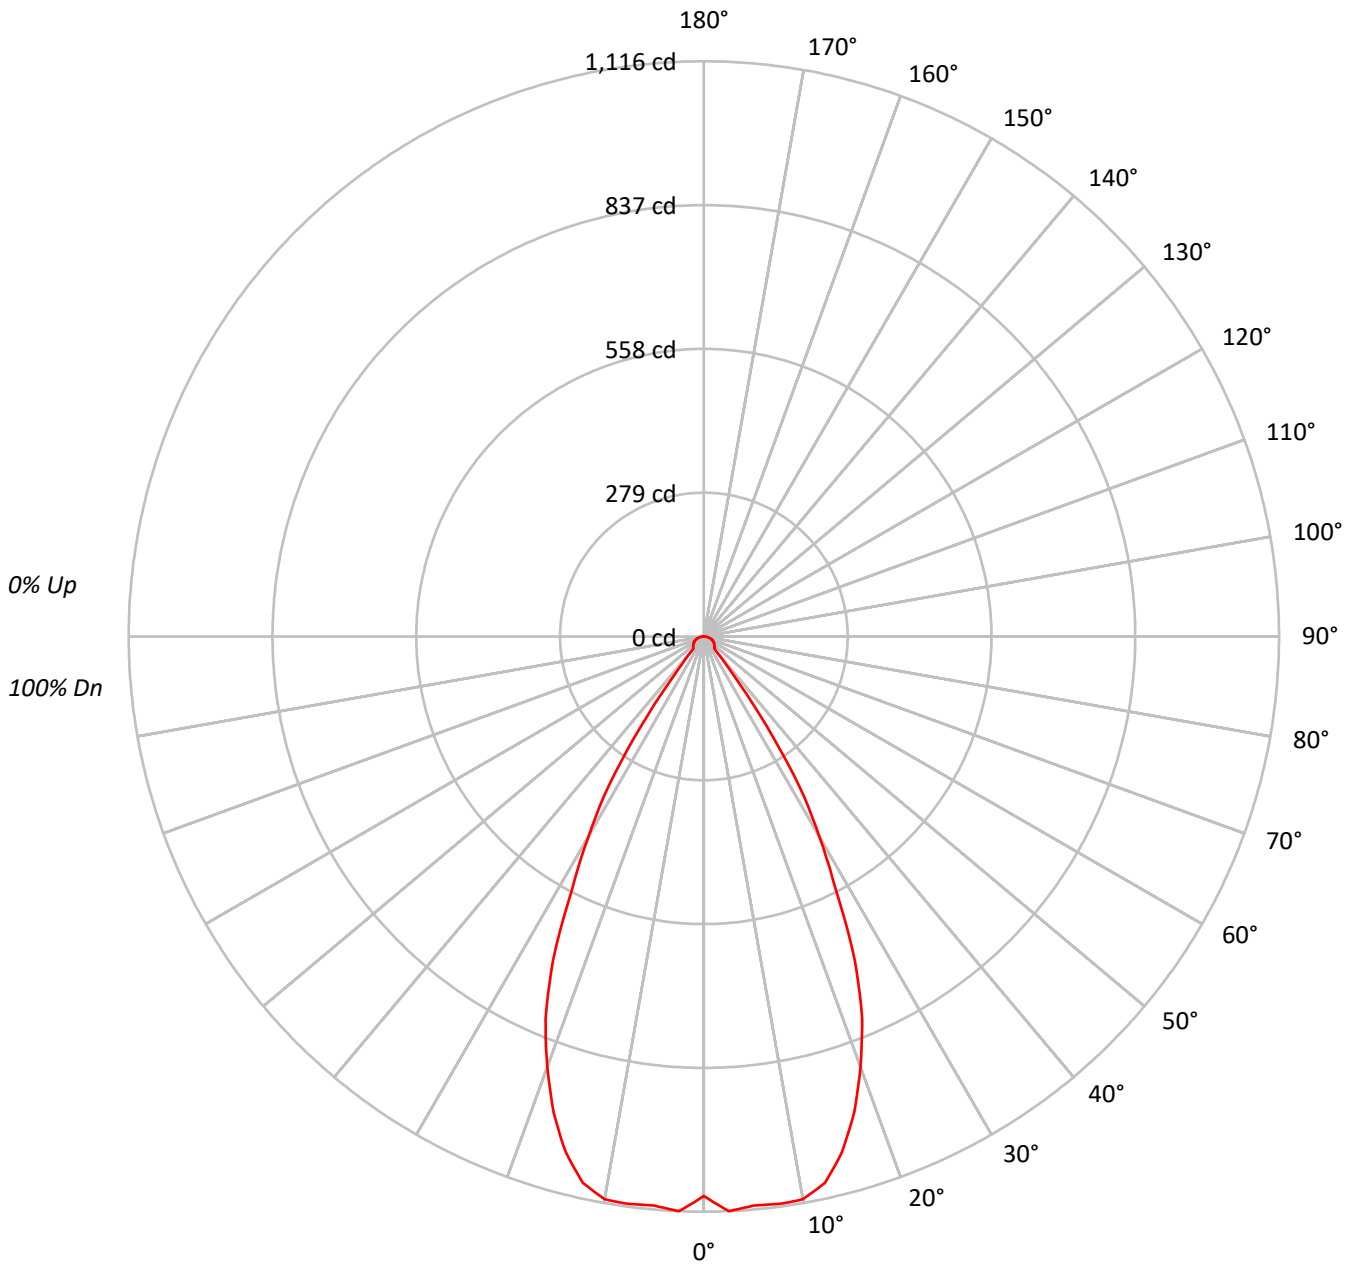



TEST NUMBER: P760648

CATALOG NUMBER: LD6D10D010-EU6DR600210IC9027-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	118613
5°	121534
10°	123006
15°	117176
20°	103308
25°	83569
30°	56521
35°	28317
40°	4593
45°	4496
50°	4589
55°	4667
60°	4786
65°	4886
70°	5015
75°	5066
80°	4908
85°	4137

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 5066 cd/sqm



TEST NUMBER: P760648

CATALOG NUMBER: LD6D10D010-EU6DR600210IC9027-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.9	11.6
10°-20°	286.5	31.3
20°-30°	308.3	33.7
30°-40°	134.0	14.7
40°-50°	22.5	2.5
50°-60°	21.9	2.4
60°-70°	18.7	2.0
70°-80°	12.5	1.4
80°-90°	3.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	700.7	76.7
0°-40°	834.8	91.3
0°-60°	879.1	96.2
0°-90°	914.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	914.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1086	
5°	1108	106
15°	1036	287
25°	693	308
35°	212	134
45°	29	23
55°	24	22
65°	19	19
75°	12	13
85°	3	4
90°	0	



TEST NUMBER: P760648

CATALOG NUMBER: LD6D10D010-EU6DR600210IC9027-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1085.6
2.5°	1116.2
5°	1108.1
7.5°	1110.7
10°	1108.7
12.5°	1085.8
15°	1035.9
17.5°	969.0
20°	888.5
22.5°	802.5
25°	693.2
27.5°	554.4
30°	448.0
32.5°	345.3
35°	212.3
37.5°	90.9
40°	32.2
42.5°	29.7
45°	29.1
47.5°	28.1
50°	27.0
52.5°	25.7
55°	24.5
57.5°	23.1
60°	21.9
62.5°	20.5
65°	18.9
67.5°	17.4
70°	15.7
72.5°	13.9
75°	12.0
77.5°	9.9
80°	7.8
82.5°	5.5
85°	3.3
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)