

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760349

Luminaire Tested: LD6D10D010-EU6DR400210IC9030-6LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760349  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR400210IC9030-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1029.4 lumens  
Efficiency: N/A  
Efficacy: 88.0 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760349  
CATALOG NUMBER: LD6D10D010-EU6DR400210IC9030-6LBDP1MW

### Luminous Intensity Polar Plot

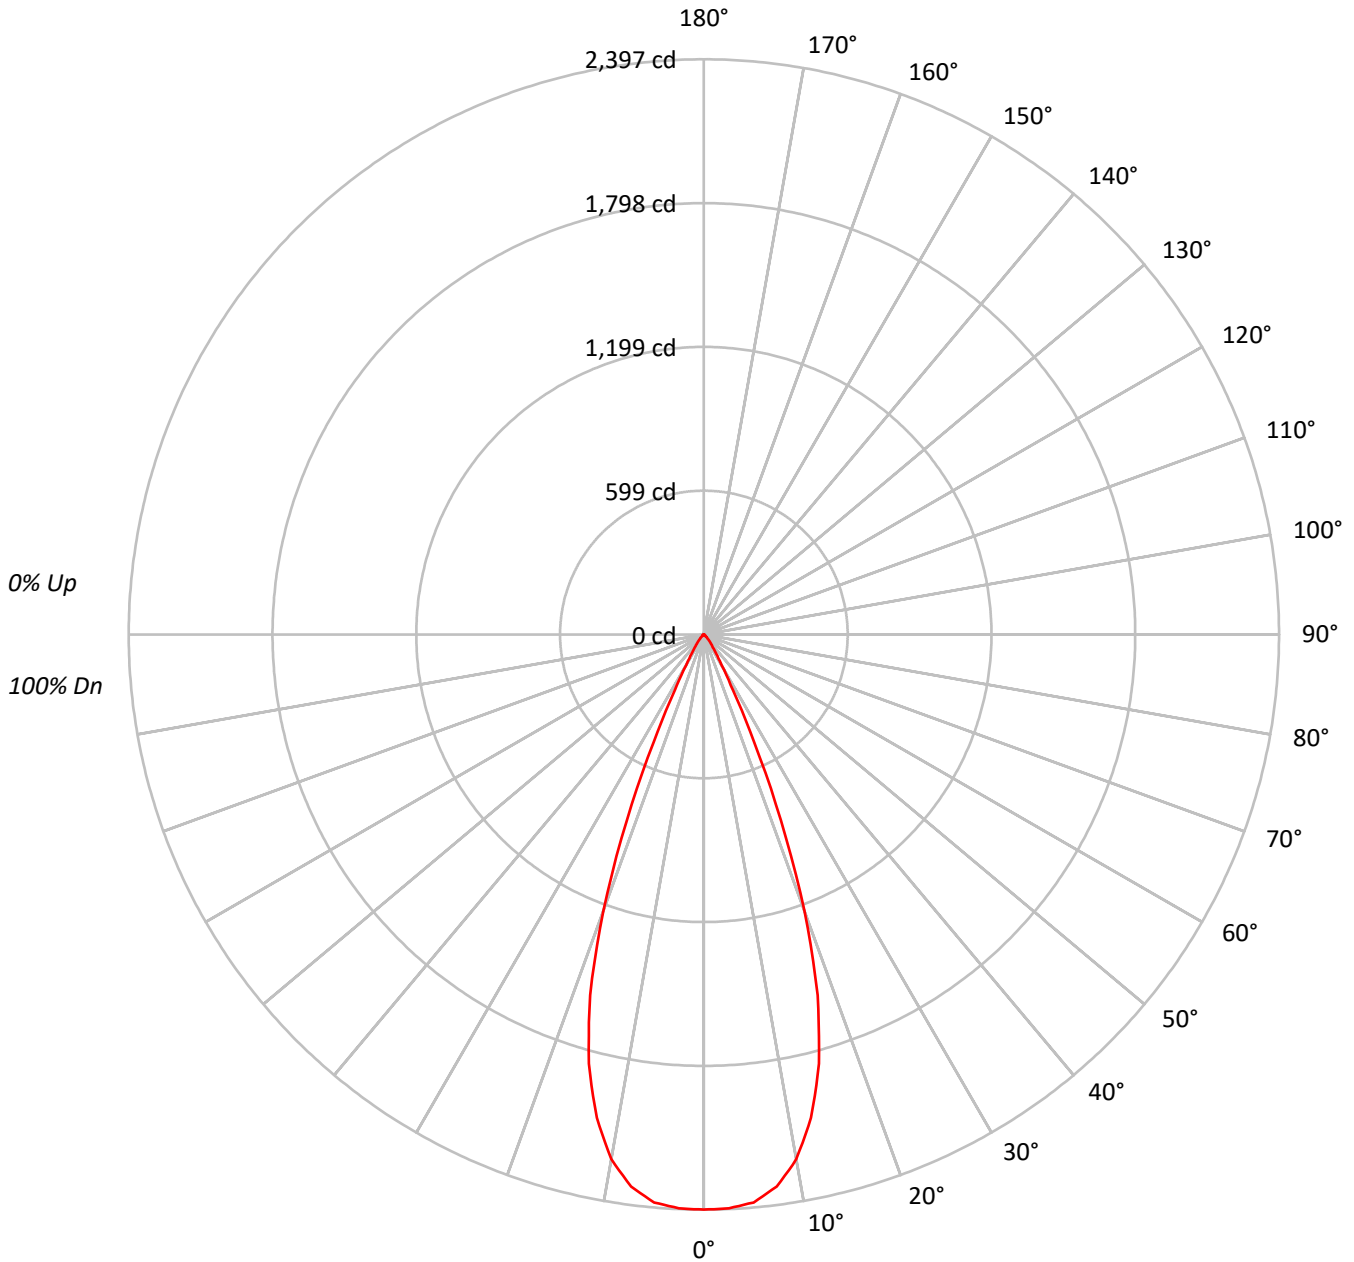



TEST NUMBER: P760349

CATALOG NUMBER: LD6D10D010-EU6DR400210IC9030-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 | 103 | 101 | 100 | 99  | 98  | 97  | 96  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 110 | 106 | 103 | 100 | 108 | 105 | 102 | 99  | 102 | 99  | 97  | 99  | 97  | 95  | 96  | 95  | 93  | 92  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 106 | 101 | 97  | 94  | 104 | 100 | 96  | 93  | 97  | 94  | 92  | 95  | 93  | 90  | 93  | 91  | 89  | 88  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 102 | 97  | 92  | 89  | 101 | 95  | 91  | 88  | 93  | 90  | 87  | 92  | 89  | 86  | 90  | 87  | 85  | 84  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 99  | 92  | 88  | 84  | 97  | 91  | 87  | 84  | 90  | 86  | 83  | 88  | 85  | 83  | 87  | 84  | 82  | 81  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 95  | 88  | 84  | 80  | 94  | 88  | 83  | 80  | 86  | 82  | 80  | 85  | 82  | 79  | 84  | 81  | 79  | 77  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 92  | 85  | 80  | 77  | 91  | 84  | 80  | 77  | 83  | 79  | 76  | 82  | 79  | 76  | 81  | 78  | 76  | 74  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 89  | 82  | 77  | 74  | 88  | 81  | 77  | 74  | 80  | 76  | 73  | 79  | 76  | 73  | 78  | 75  | 73  | 72  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 86  | 79  | 74  | 71  | 85  | 78  | 74  | 71  | 77  | 73  | 71  | 76  | 73  | 70  | 76  | 72  | 70  | 69  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 83  | 76  | 71  | 68  | 82  | 75  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 68  | 73  | 70  | 68  | 67  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 261865 |
| 5°  | 260595 |
| 10° | 246312 |
| 15° | 209399 |
| 20° | 142725 |
| 25° | 59543  |
| 30° | 18723  |
| 35° | 8710   |
| 40° | 4807   |
| 45° | 2210   |
| 50° | 1071   |
| 55° | 591    |
| 60° | 306    |
| 65° | 103    |
| 70° | 32     |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2210 cd/sqm



TEST NUMBER: P760349

CATALOG NUMBER: LD6D10D010-EU6DR400210IC9030-6LBDP1MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 221.9  | 21.6      |
| 10°-20°   | 497.0  | 48.3      |
| 20°-30°   | 248.8  | 24.2      |
| 30°-40°   | 45.6   | 4.4       |
| 40°-50°   | 12.6   | 1.2       |
| 50°-60°   | 3.0    | 0.3       |
| 60°-70°   | 0.6    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 967.7  | 94.0      |
| 0°-40°    | 1013.3 | 98.4      |
| 0°-60°    | 1028.8 | 99.9      |
| 0°-90°    | 1029.4 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1029.4 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2397 |      |
| 5°  | 2376 | 222  |
| 15° | 1851 | 497  |
| 25° | 494  | 249  |
| 35° | 65   | 46   |
| 45° | 14   | 13   |
| 55° | 3    | 3    |
| 65° | 0    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P760349

CATALOG NUMBER: LD6D10D010-EU6DR400210IC9030-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2396.7 |
| 2.5°  | 2393.2 |
| 5°    | 2376.0 |
| 7.5°  | 2321.1 |
| 10°   | 2220.1 |
| 12.5° | 2062.8 |
| 15°   | 1851.2 |
| 17.5° | 1576.1 |
| 20°   | 1227.5 |
| 22.5° | 836.9  |
| 25°   | 493.9  |
| 27.5° | 261.1  |
| 30°   | 148.4  |
| 32.5° | 95.9   |
| 35°   | 65.3   |
| 37.5° | 46.6   |
| 40°   | 33.7   |
| 42.5° | 23.1   |
| 45°   | 14.3   |
| 47.5° | 9.1    |
| 50°   | 6.3    |
| 52.5° | 4.5    |
| 55°   | 3.1    |
| 57.5° | 1.9    |
| 60°   | 1.4    |
| 62.5° | 0.9    |
| 65°   | 0.4    |
| 67.5° | 0.3    |
| 70°   | 0.1    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)