

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760834

Luminaire Tested: LD6D10D010-EU6DR700210IC9035-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760834  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR700210IC9035-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1107.0 lumens  
Efficiency: N/A  
Efficacy: 94.6 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760834  
CATALOG NUMBER: LD6D10D010-EU6DR700210IC9035-6LBS1MW

### Luminous Intensity Polar Plot

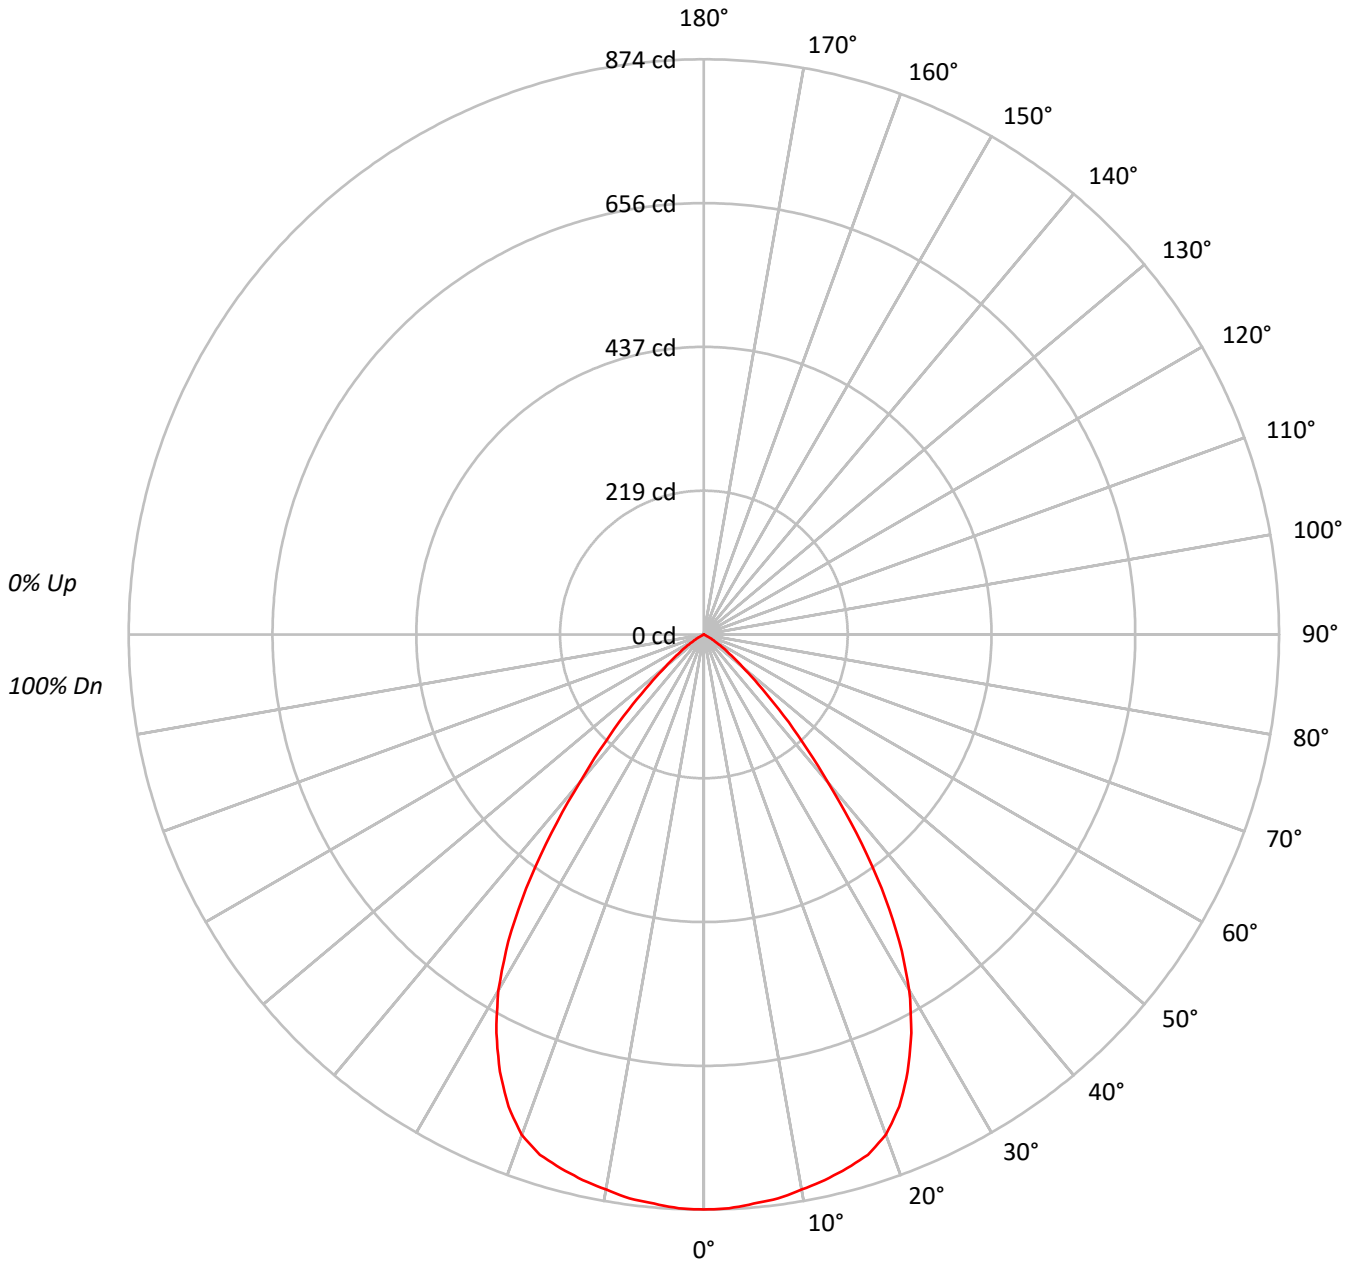



TEST NUMBER: P760834

CATALOG NUMBER: LD6D10D010-EU6DR700210IC9035-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78				78															
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71				71															
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65				65															
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60				60															
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56				56															
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51				51															
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48				48															
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44				44															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	95461
5°	95223
10°	95025
15°	94994
20°	94065
25°	88367
30°	78776
35°	62810
40°	41705
45°	24924
50°	12918
55°	6801
60°	2404
65°	52
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 24924 cd/sqm



TEST NUMBER: P760834

CATALOG NUMBER: LD6D10D010-EU6DR700210IC9035-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.6	7.5
10°-20°	236.8	21.4
20°-30°	334.1	30.2
30°-40°	288.4	26.1
40°-50°	129.1	11.7
50°-60°	33.8	3.1
60°-70°	2.2	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	653.5	59.0
0°-40°	941.9	85.1
0°-60°	1104.8	99.8
0°-90°	1107.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1107.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	874	
5°	868	83
15°	840	237
25°	733	334
35°	471	288
45°	161	129
55°	36	34
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760834  
CATALOG NUMBER: LD6D10D010-EU6DR700210IC9035-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	873.7
2.5°	872.8
5°	868.2
7.5°	864.5
10°	856.5
12.5°	849.2
15°	839.8
17.5°	829.0
20°	809.0
22.5°	776.2
25°	733.0
27.5°	682.8
30°	624.4
32.5°	552.9
35°	470.9
37.5°	380.4
40°	292.4
42.5°	222.2
45°	161.3
47.5°	111.3
50°	76.0
52.5°	52.5
55°	35.7
57.5°	21.5
60°	11.0
62.5°	3.4
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)