

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760544

Luminaire Tested: LD6D10D010-EU6DR500210IC9050-6LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760544  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR500210IC9050-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1099.4 lumens  
Efficiency: N/A  
Efficacy: 94.0 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760544  
CATALOG NUMBER: LD6D10D010-EU6DR500210IC9050-6LBDP1MW

### Luminous Intensity Polar Plot

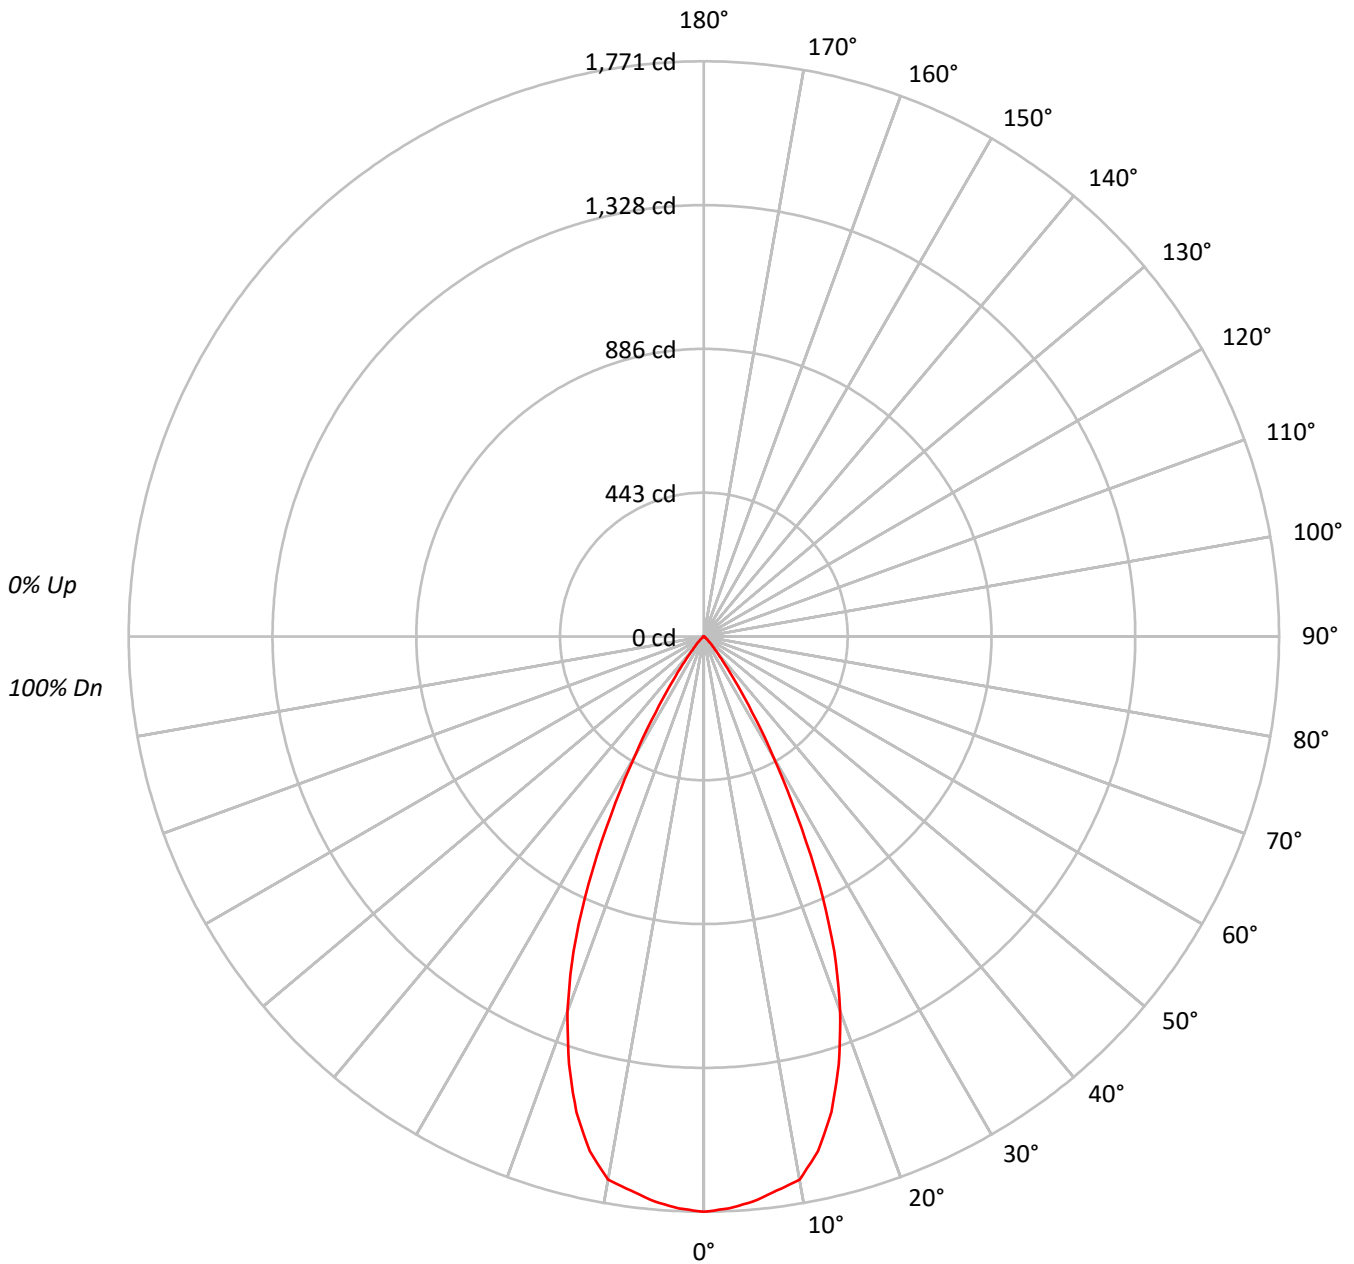



TEST NUMBER: P760544

CATALOG NUMBER: LD6D10D010-EU6DR500210IC9050-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95					95			
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90					90			
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85					85			
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80					80			
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76					76			
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72					72			
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69					69			
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65					65			
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62					62			
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59					59			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	193534
5°	191509
10°	188353
15°	171516
20°	142713
25°	101303
30°	53619
35°	21848
40°	8116
45°	3724
50°	1513
55°	800
60°	393
65°	129
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3724 cd/sqm



TEST NUMBER: P760544

CATALOG NUMBER: LD6D10D010-EU6DR500210IC9050-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	165.0	15.0
10°-20°	417.1	37.9
20°-30°	374.7	34.1
30°-40°	117.3	10.7
40°-50°	20.5	1.9
50°-60°	4.1	0.4
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	956.8	87.0
0°-40°	1074.1	97.7
0°-60°	1098.7	99.9
0°-90°	1099.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1099.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1771	
5°	1746	165
15°	1516	417
25°	840	375
35°	164	117
45°	24	21
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760544

CATALOG NUMBER: LD6D10D010-EU6DR500210IC9050-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1771.3
2.5°	1762.5
5°	1746.1
7.5°	1721.0
10°	1697.7
12.5°	1623.1
15°	1516.3
17.5°	1380.6
20°	1227.4
22.5°	1050.2
25°	840.3
27.5°	617.8
30°	425.0
32.5°	276.7
35°	163.8
37.5°	94.1
40°	56.9
42.5°	37.0
45°	24.1
47.5°	14.6
50°	8.9
52.5°	6.1
55°	4.2
57.5°	2.9
60°	1.8
62.5°	1.0
65°	0.5
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)