

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760780

Luminaire Tested: LD6D10D010-EU6DR650210IC9050-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P760780
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D10D010-EU6DR650210IC9050-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1027.8 lumens
Efficiency: N/A
Efficacy: 87.8 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P760780
CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBS1H

Luminous Intensity Polar Plot

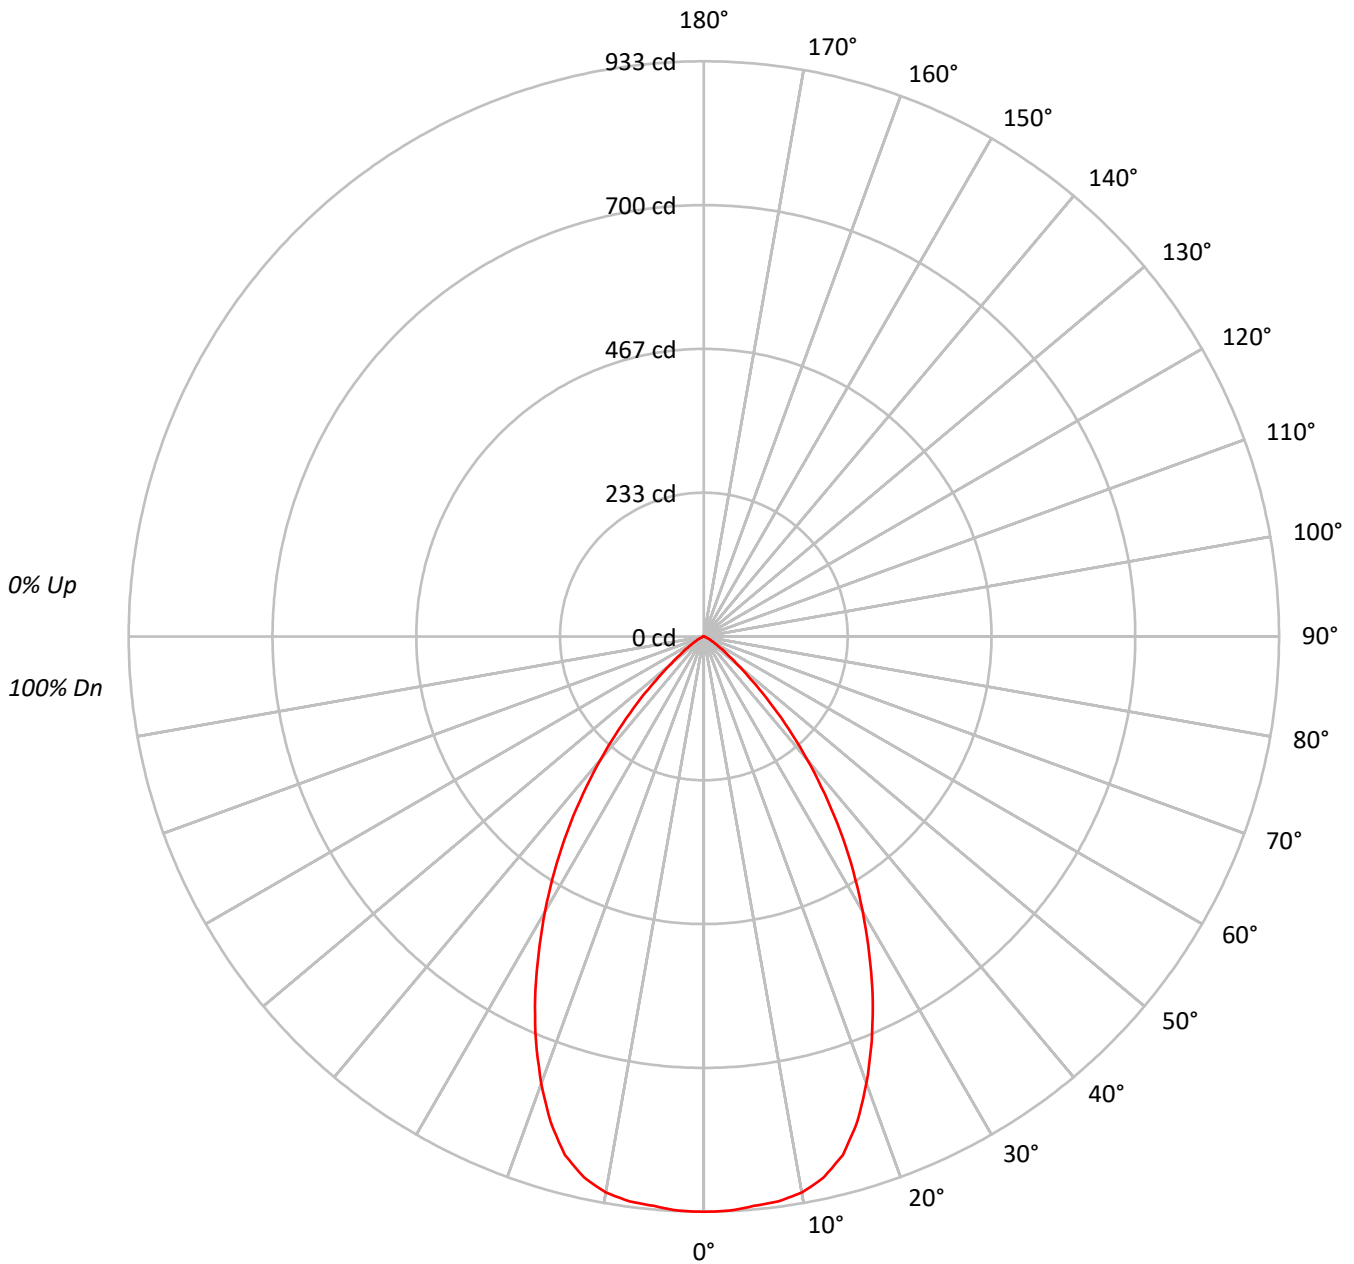



TEST NUMBER: P760780

CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61				61															
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56				56															
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52				52															
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49				49															
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46				46															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54502
5°	54365
10°	54317
15°	52646
20°	47925
25°	41765
30°	34738
35°	27521
40°	19861
45°	12546
50°	6542
55°	3472
60°	1822
65°	1009
70°	427
75°	474
80°	336
85°	268

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12546 cd/sqm



TEST NUMBER: P760780

CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.2	8.6
10°-20°	241.7	23.5
20°-30°	295.4	28.7
30°-40°	239.7	23.3
40°-50°	119.4	11.6
50°-60°	33.3	3.2
60°-70°	7.6	0.7
70°-80°	2.0	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	625.3	60.8
0°-40°	865.0	84.2
0°-60°	1017.7	99.0
0°-90°	1027.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1027.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	933	
5°	927	88
15°	871	242
25°	648	295
35°	386	240
45°	152	119
55°	34	33
65°	7	8
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P760780

CATALOG NUMBER: LD6D10D010-EU6DR650210IC9050-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	933.2
2.5°	932.5
5°	927.3
7.5°	924.2
10°	915.9
12.5°	898.9
15°	870.7
17.5°	826.5
20°	771.1
22.5°	711.3
25°	648.1
27.5°	580.5
30°	515.1
32.5°	450.5
35°	386.0
37.5°	321.7
40°	260.5
42.5°	203.2
45°	151.9
47.5°	105.9
50°	72.0
52.5°	49.6
55°	34.1
57.5°	23.0
60°	15.6
62.5°	10.8
65°	7.3
67.5°	3.7
70°	2.5
72.5°	2.3
75°	2.1
77.5°	1.4
80°	1.0
82.5°	0.7
85°	0.4
87.5°	0.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)