

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757124

Luminaire Tested: LD6D02D010-EU6DR300210IC9024-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P757124
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR300210IC9024-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 324.2 lumens
Efficiency: N/A
Efficacy: 63.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757124

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBDP1LI

Luminous Intensity Polar Plot

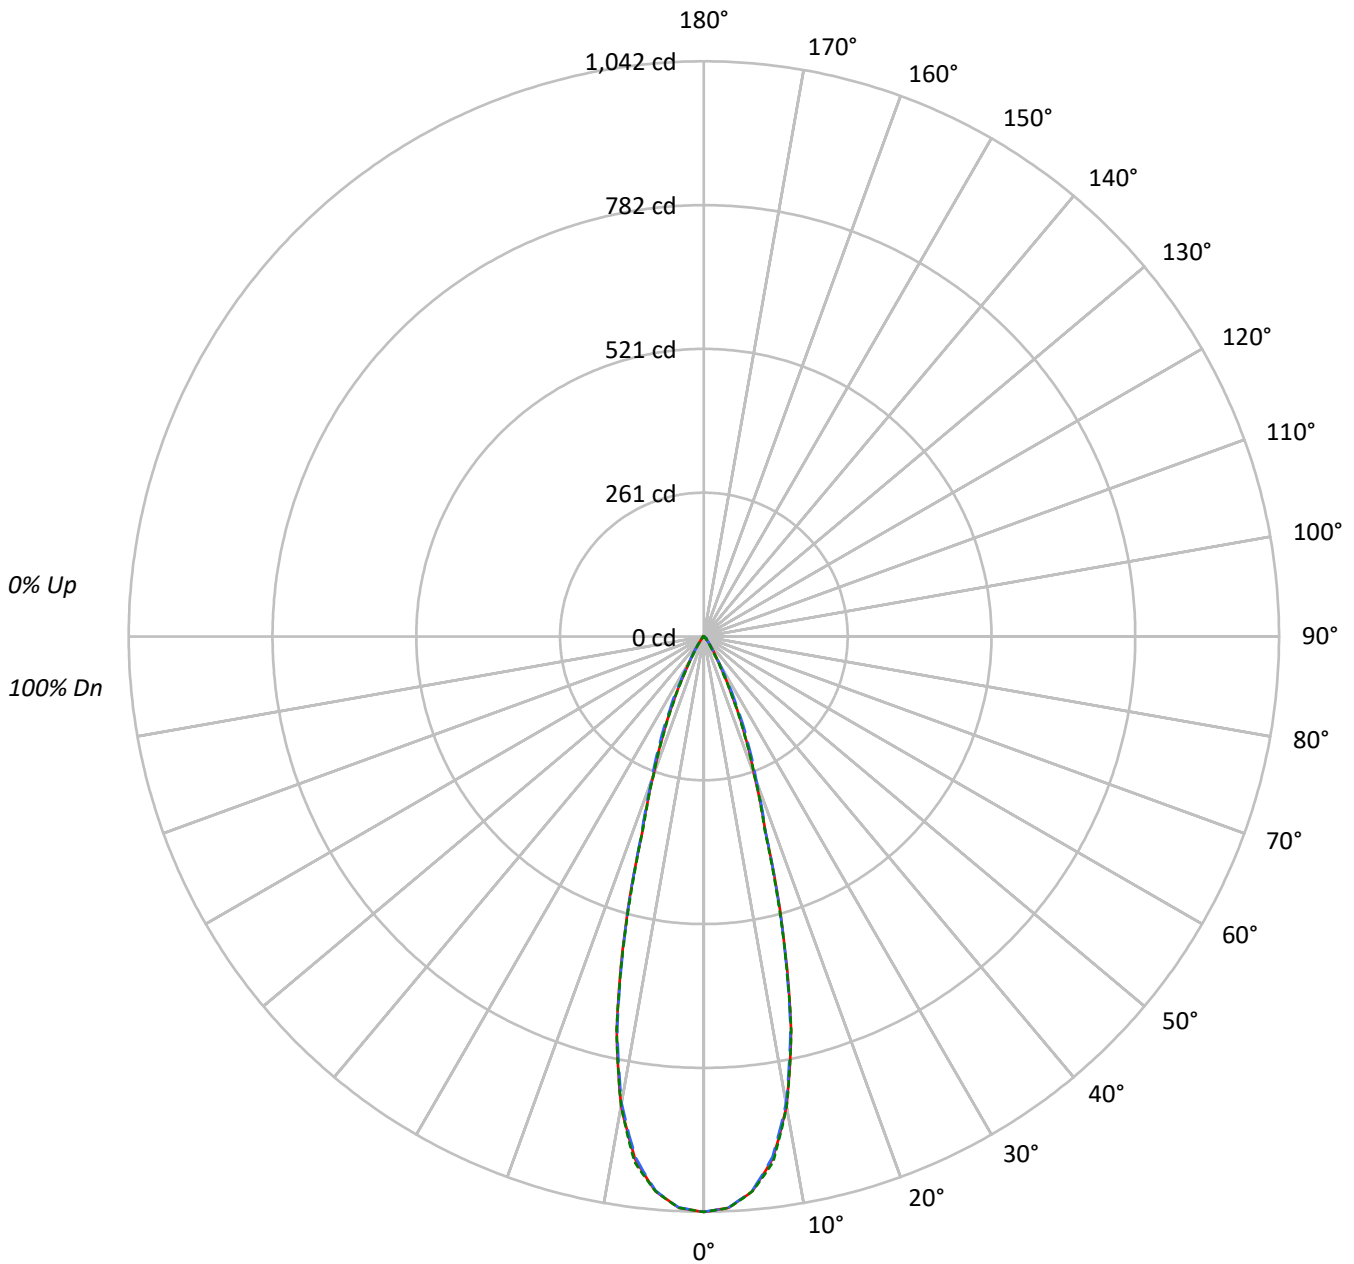



TEST NUMBER: P757124

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	79796	79796	79796
5°	77512	77420	77520
10°	67138	66664	67123
15°	43806	43568	43354
20°	21781	22596	21757
25°	10971	12373	10751
30°	4393	4782	3827
35°	2037	1953	1635
40°	879	979	829
45°	617	769	628
50°	214	560	226
55°	120	227	133
60°	92	107	92
65°	54	54	54
70°	45	22	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 769 cd/sqm



TEST NUMBER: P757124

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.7	28.3
10°-20°	147.7	45.5
20°-30°	63.8	19.7
30°-40°	14.5	4.5
40°-50°	5.0	1.5
50°-60°	1.2	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	303.1	93.5
0°-40°	317.7	98.0
0°-60°	323.9	99.9
0°-90°	324.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	324.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1042	1042	1042	1042	1042	
5°	1009	1008	1008	1010	1009	92
15°	553	546	550	548	547	148
25°	130	135	146	131	127	62
35°	22	22	21	21	18	15
45°	6	7	7	7	6	4
55°	1	1	2	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P757124

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1042.5	1042.5	1042.5	1042.5	1042.5
2.5°	1035.7	1034.9	1035.4	1035.8	1036.1
5°	1008.8	1007.8	1007.6	1009.7	1008.9
7.5°	954.6	953.2	951.1	955.9	960.3
10°	863.8	862.2	857.7	859.9	863.6
12.5°	729.7	724.7	724.7	731.8	730.9
15°	552.8	546.1	549.8	548.0	547.1
17.5°	371.7	369.2	374.1	372.6	366.2
20°	267.4	268.1	277.4	272.7	267.1
22.5°	195.1	197.6	208.6	196.5	192.1
25°	129.9	134.8	146.5	131.4	127.3
27.5°	79.9	82.2	94.0	78.9	76.6
30°	49.7	48.6	54.1	46.5	43.3
32.5°	32.6	31.2	32.9	29.6	27.0
35°	21.8	22.3	20.9	20.7	17.5
37.5°	13.6	15.6	13.8	14.7	11.3
40°	8.8	11.3	9.8	10.8	8.3
42.5°	7.2	8.8	8.0	8.5	7.4
45°	5.7	7.1	7.1	7.1	5.8
47.5°	3.2	4.8	6.1	4.9	3.4
50°	1.8	2.4	4.7	2.5	1.9
52.5°	1.2	1.4	3.2	1.4	1.3
55°	0.9	1.0	1.7	1.0	1.0
57.5°	0.7	0.7	0.9	0.7	0.7
60°	0.6	0.6	0.7	0.6	0.6
62.5°	0.4	0.4	0.5	0.4	0.4
65°	0.3	0.3	0.3	0.3	0.3
67.5°	0.2	0.2	0.2	0.2	0.2
70°	0.2	0.1	0.1	0.1	0.2
72.5°	0.1	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)